




FRONT VIEW (card face)

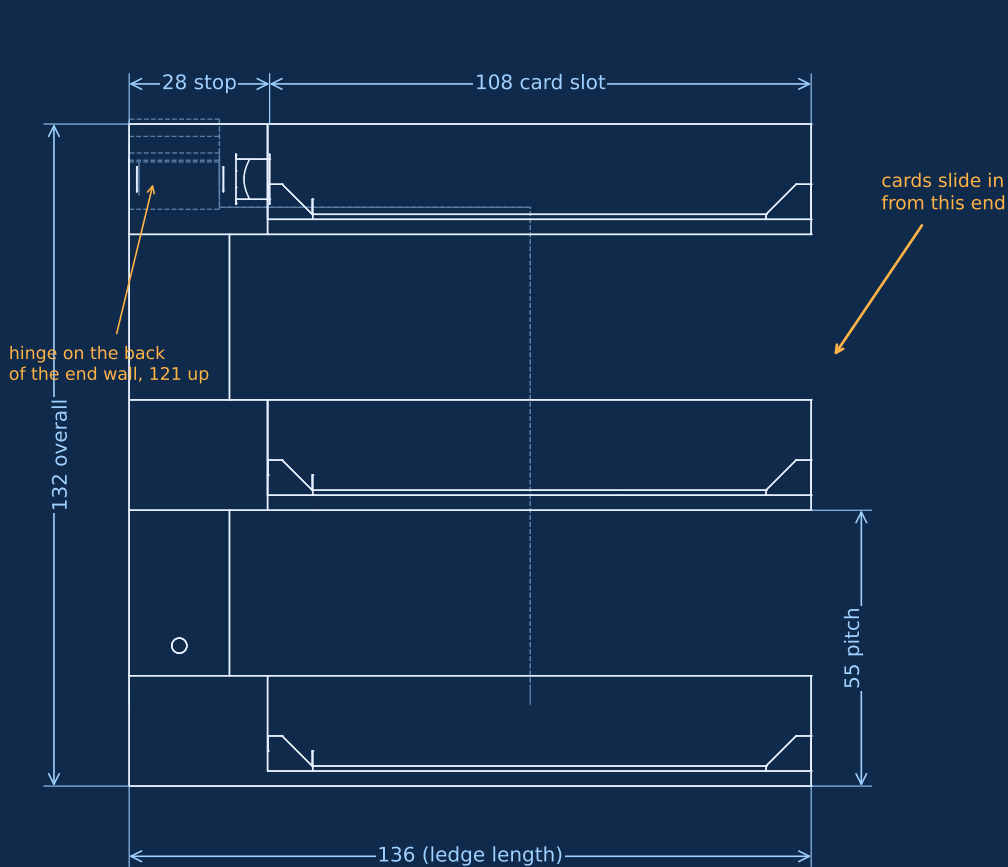

SIDE VIEW (from the open end)

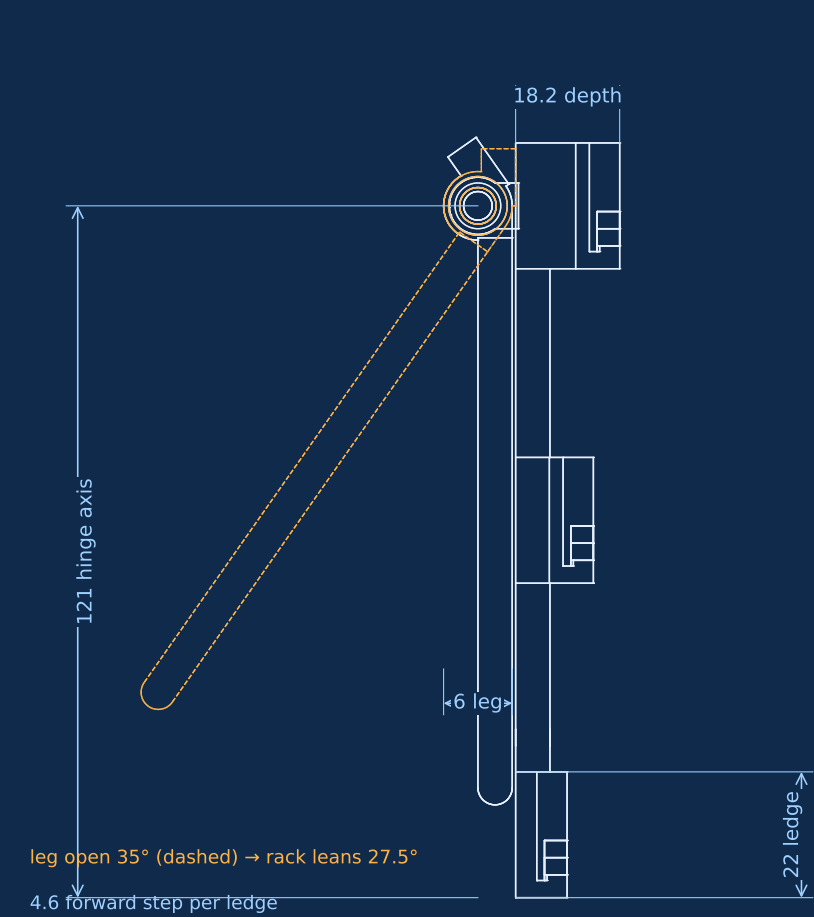

BACK VIEW (stand folded)

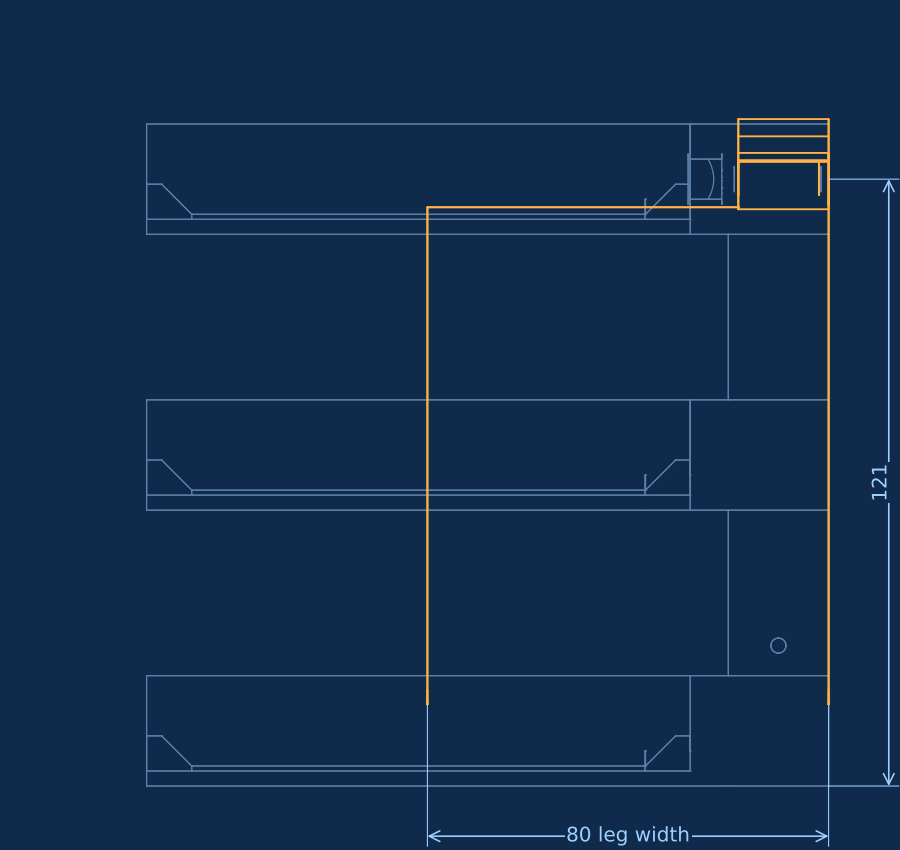

Cards: 3 carded 1:64 cars (108 × 165 mm card)
Stand open: 136 × 83 × 126 mm (W × D × H, w/o cards)
Tip angle loaded: fwd 24.9° · back 20.7° · side 20.9°
Material: PLA, 103 g printed (est.)
Print: on its side, end wall down, no supports


SLIDERACK FOLD

3-CARD RACK · GENERAL ARRANGEMENT


lean 27.5° · leg 0° / 35° · 103 g PLA · one print

SHEET 1 / 5 · UNITS: mm · A3


FRONT VIEW (card face)

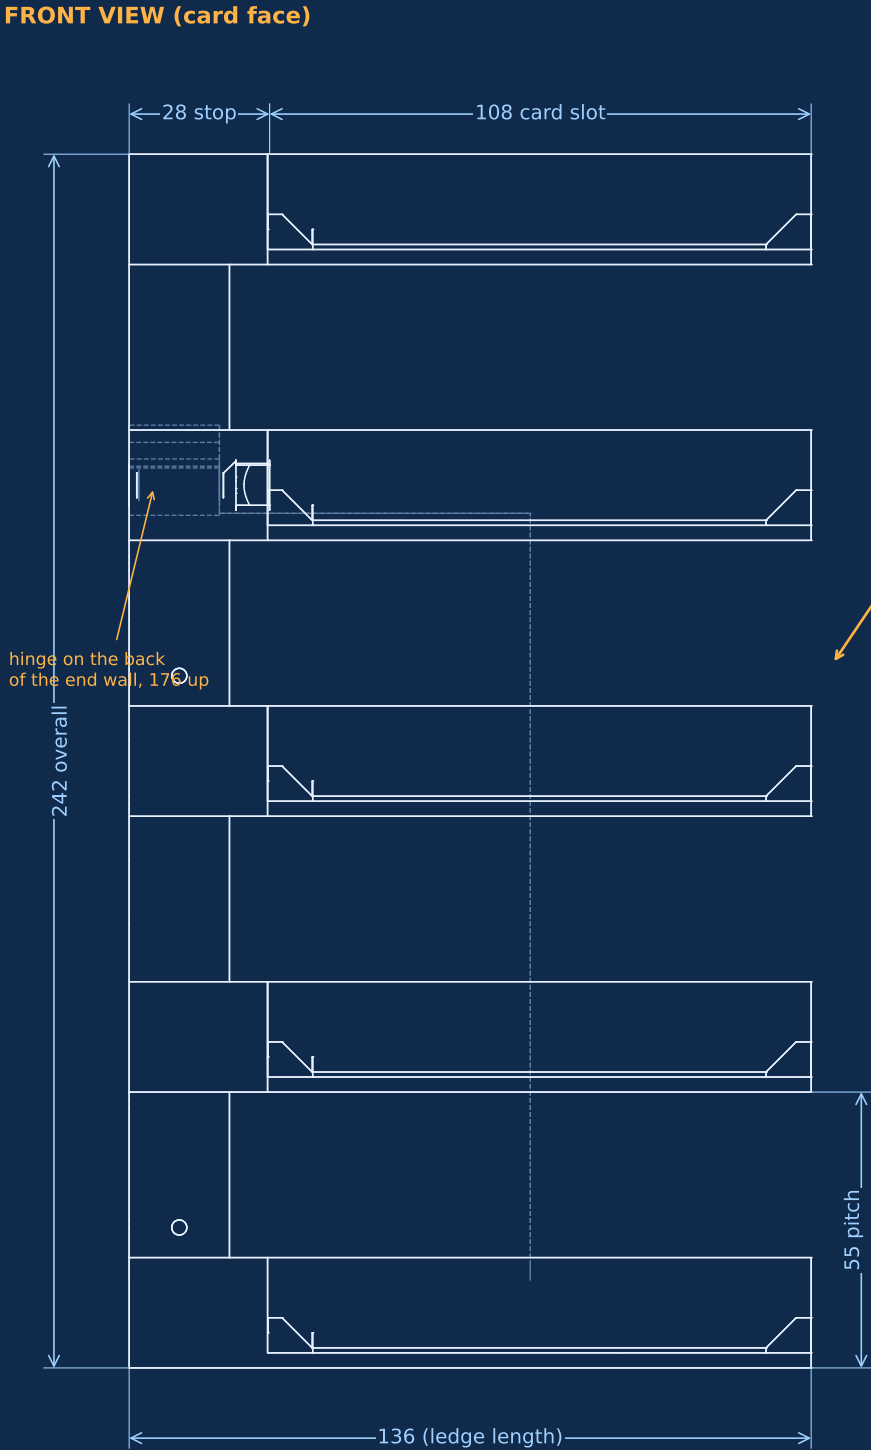

SIDE VIEW (from the open end)

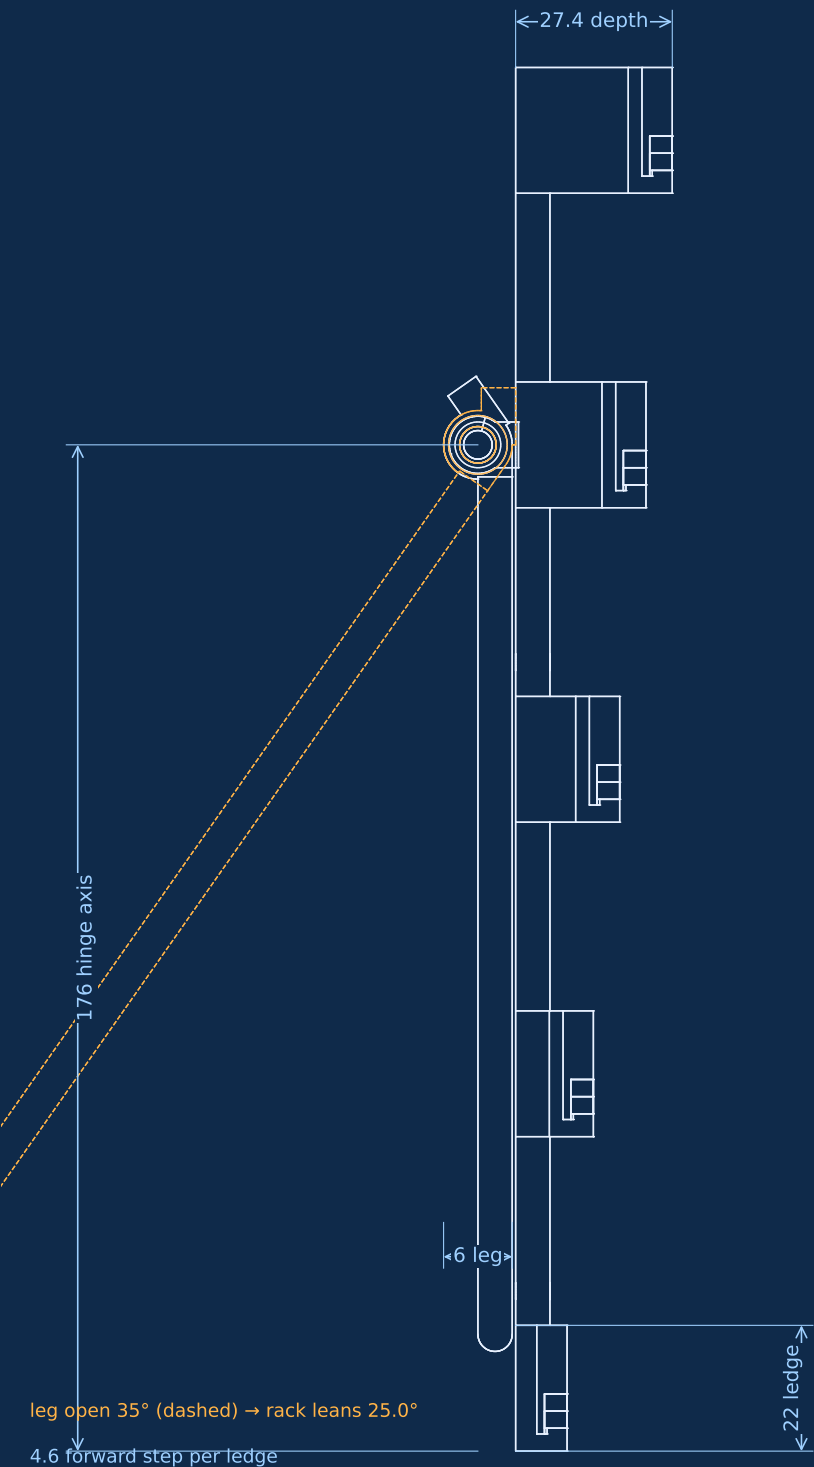

BACK VIEW (stand folded)

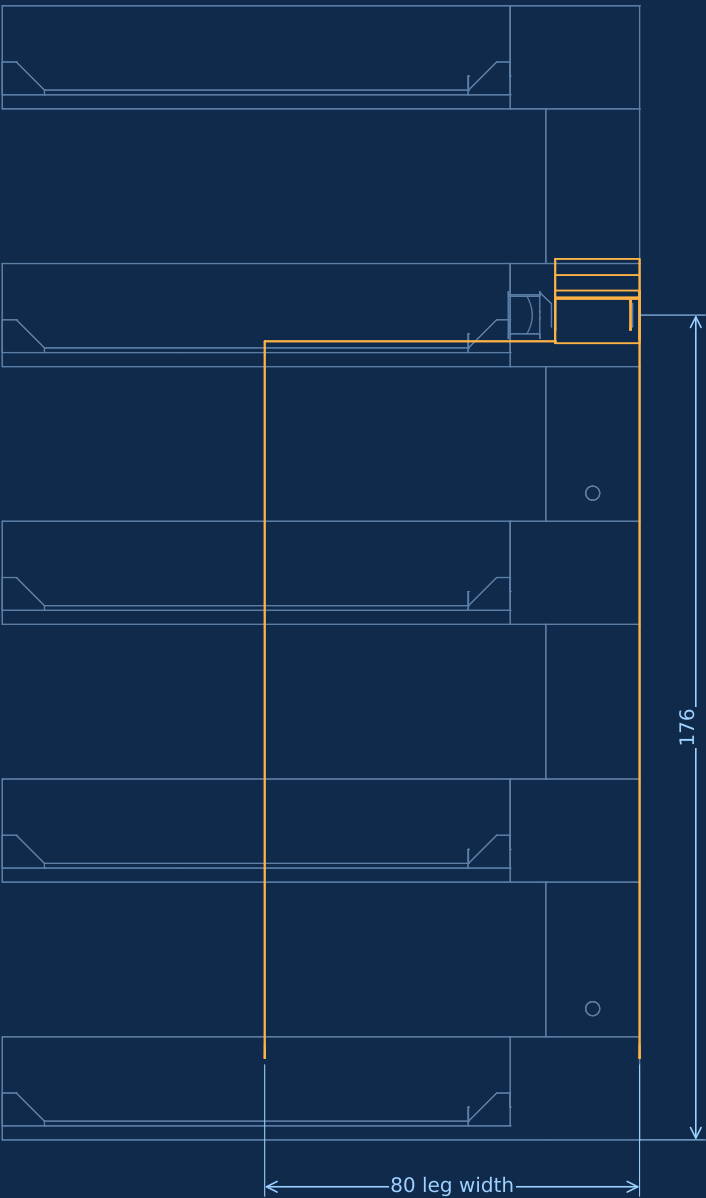

Cards: 5 carded 1:64 cars (108 × 165 mm card)
Stand open: 136 × 116 × 231 mm (W × D × H, w/o cards)
Tip angle loaded: fwd 22.8° · back 19.4° · side 15.8°
Material: PLA, 178 g printed (est.)
Print: on its side, end wall down, no supports


SLIDERACK FOLD

5-CARD RACK · GENERAL ARRANGEMENT


lean 25.0° · leg 0° / 35° · 178 g PLA · one print

SHEET 2 / 5 · UNITS: mm · A3


FRONT VIEW (card face)

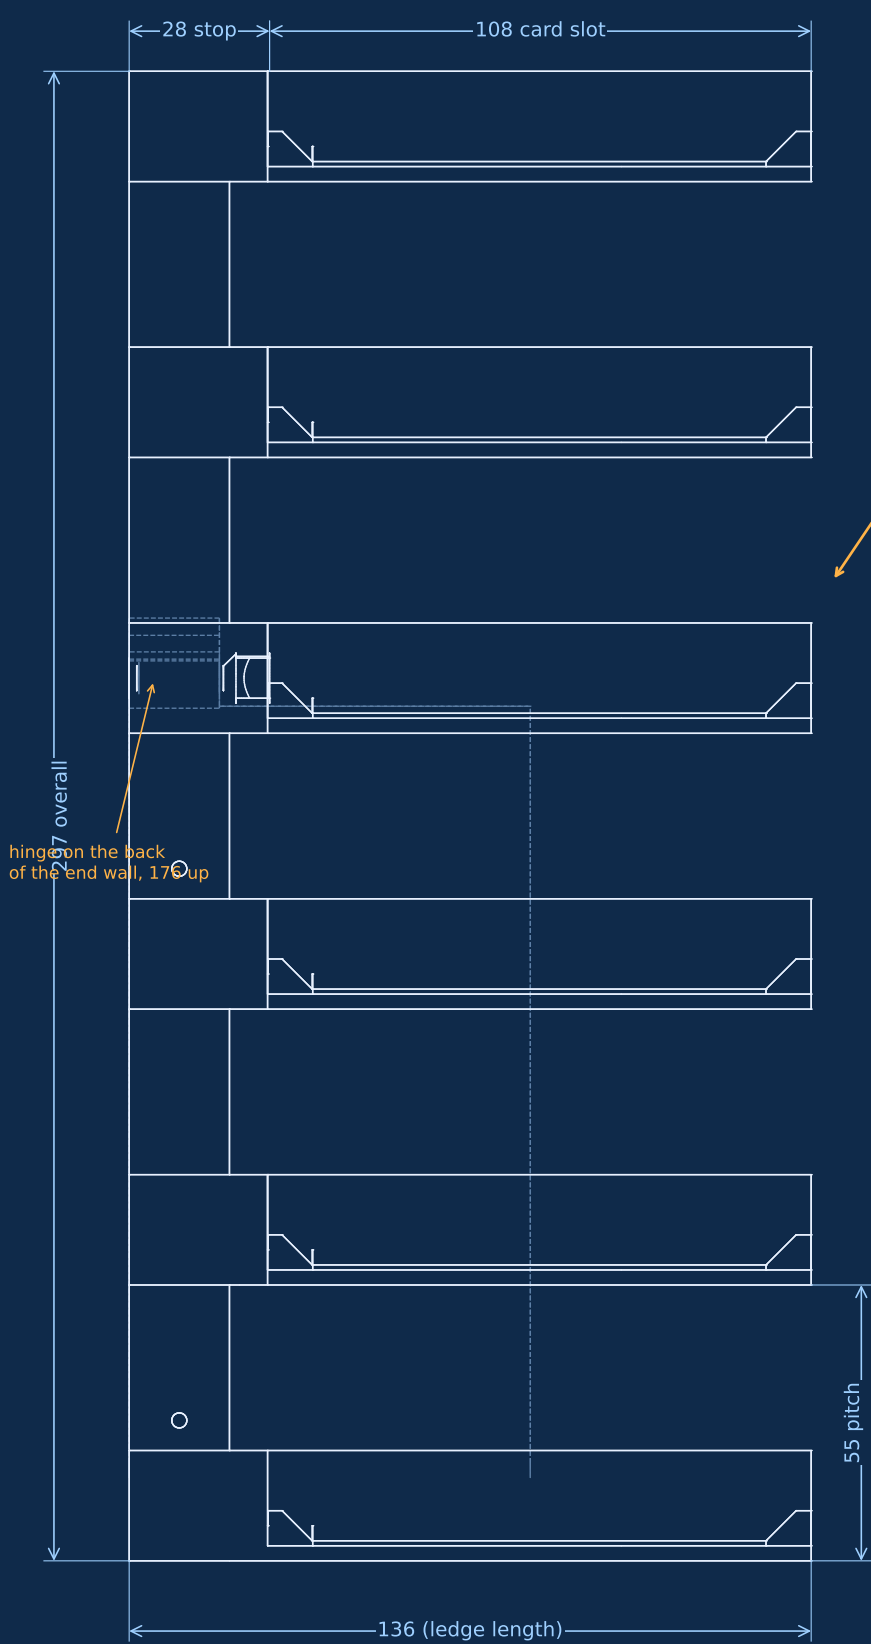

SIDE VIEW (from the open end)

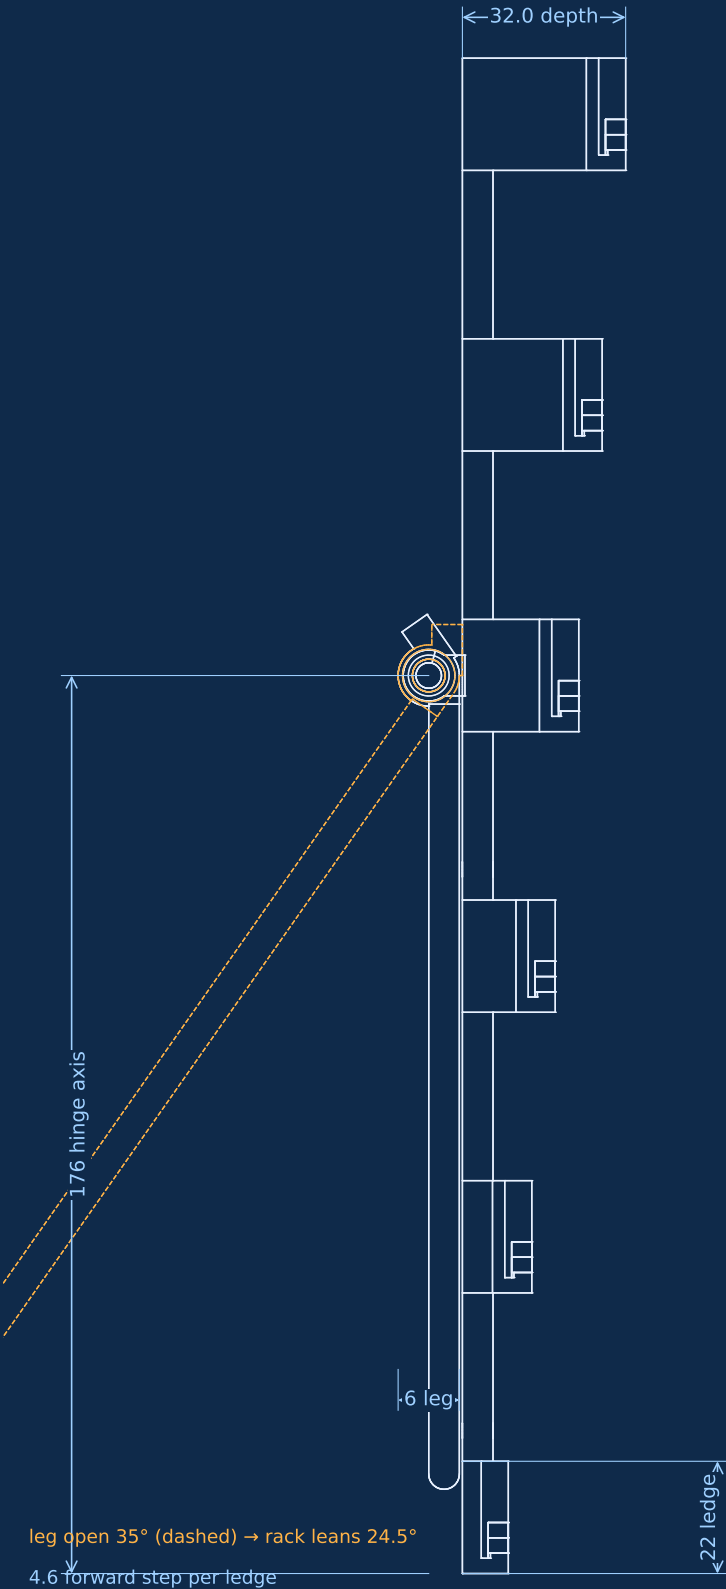

BACK VIEW (stand folded)

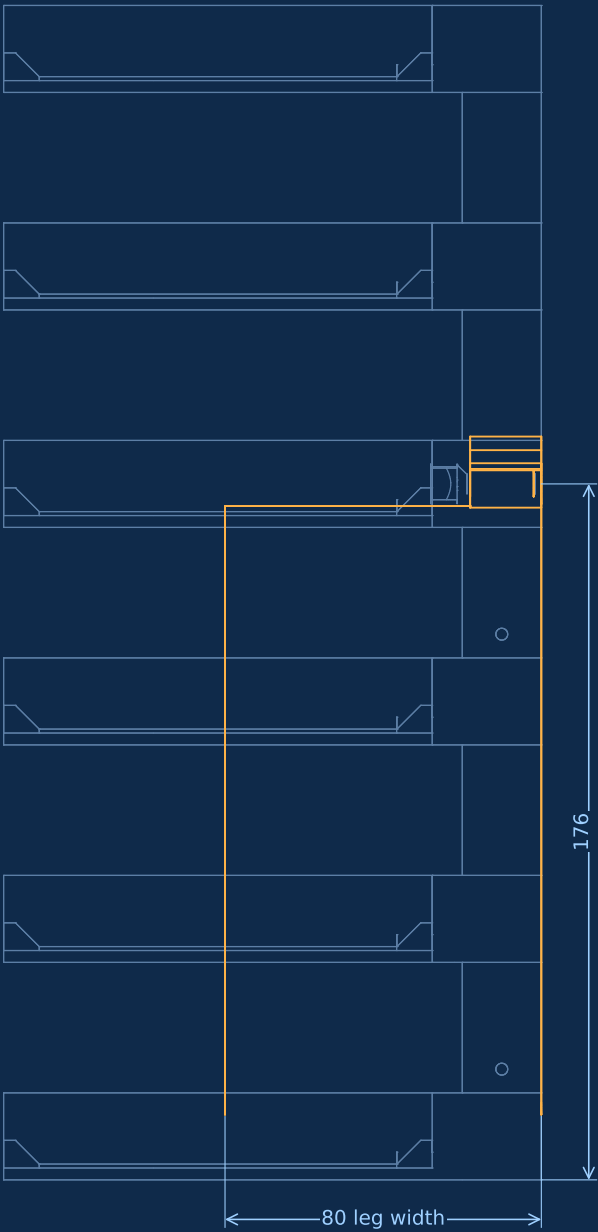

Cards: 6 carded 1:64 cars (108 × 165 mm card)
Stand open: 136 × 131 × 284 mm (W × D × H, w/o cards)
Tip angle loaded: fwd 21.5° · back 14.6° · side 12.5°
Material: PLA, 207 g printed (est.)
Print: on its side, end wall down, no supports


SLIDERACK FOLD

6-CARD RACK · GENERAL ARRANGEMENT


lean 24.5° · leg 0° / 35° · 207 g PLA · one print

SHEET 3 / 5 · UNITS: mm · A3

SECTION A-A along the hinge axis, as printed (scale ≈ 6:1)

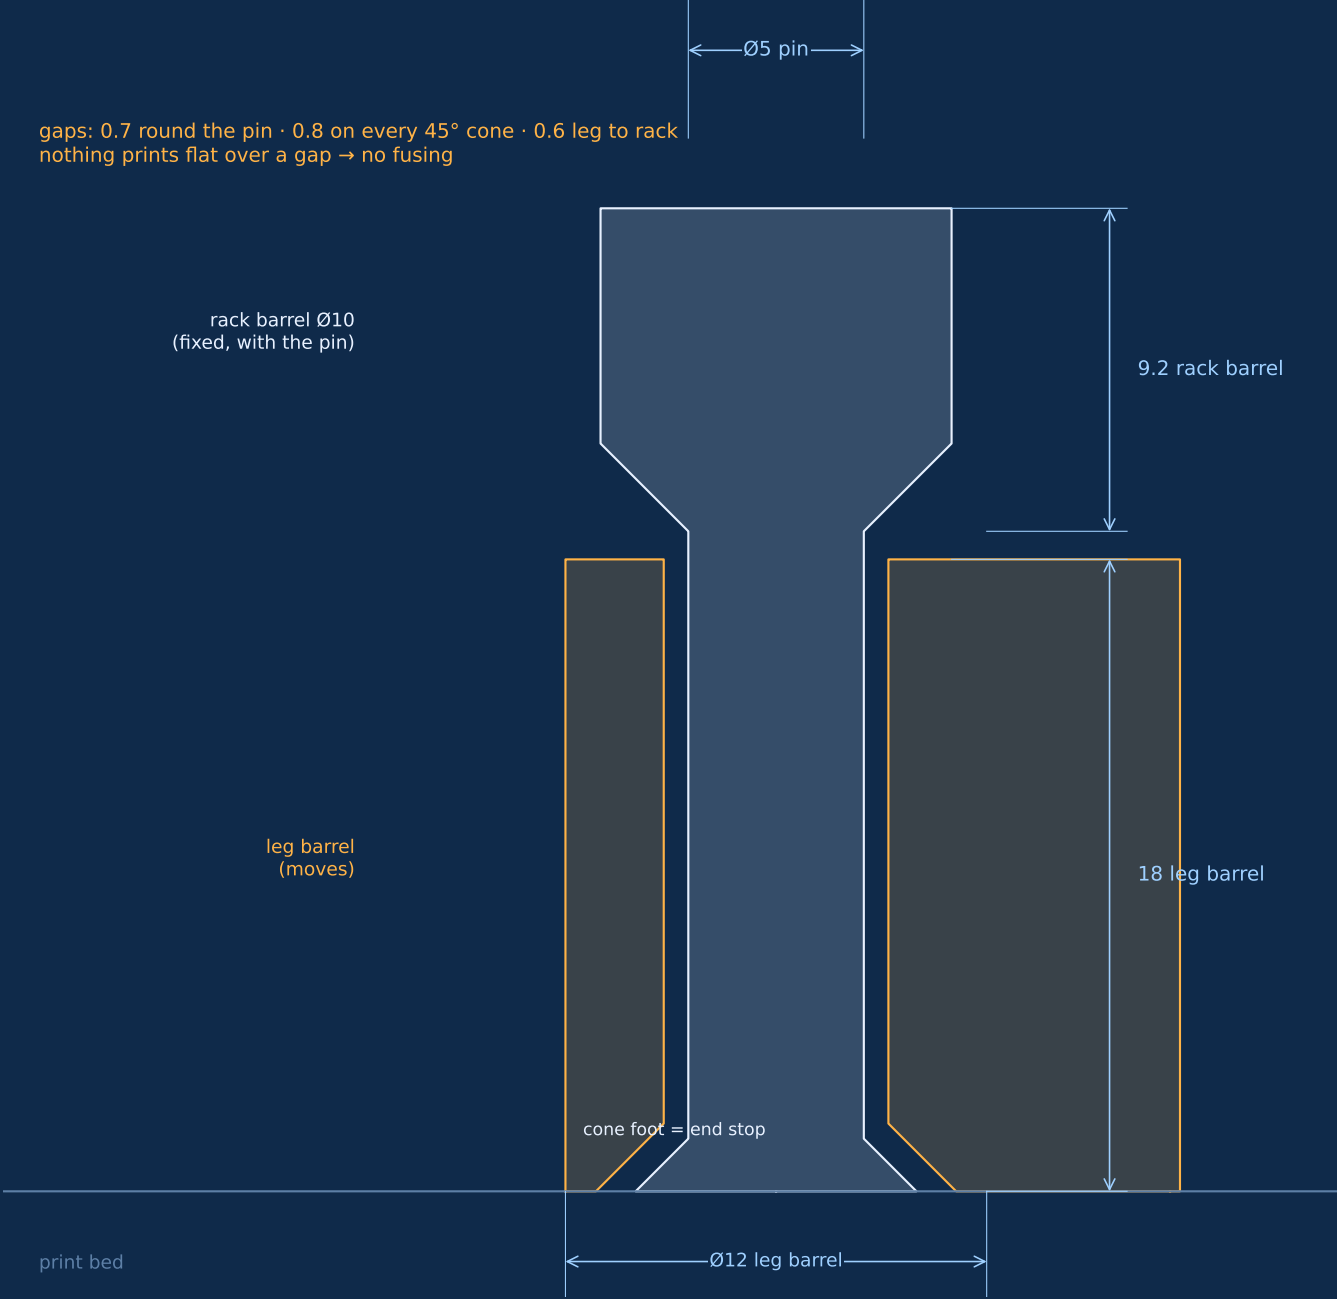

SECTION B-B through the leg barrel: the 35° stop

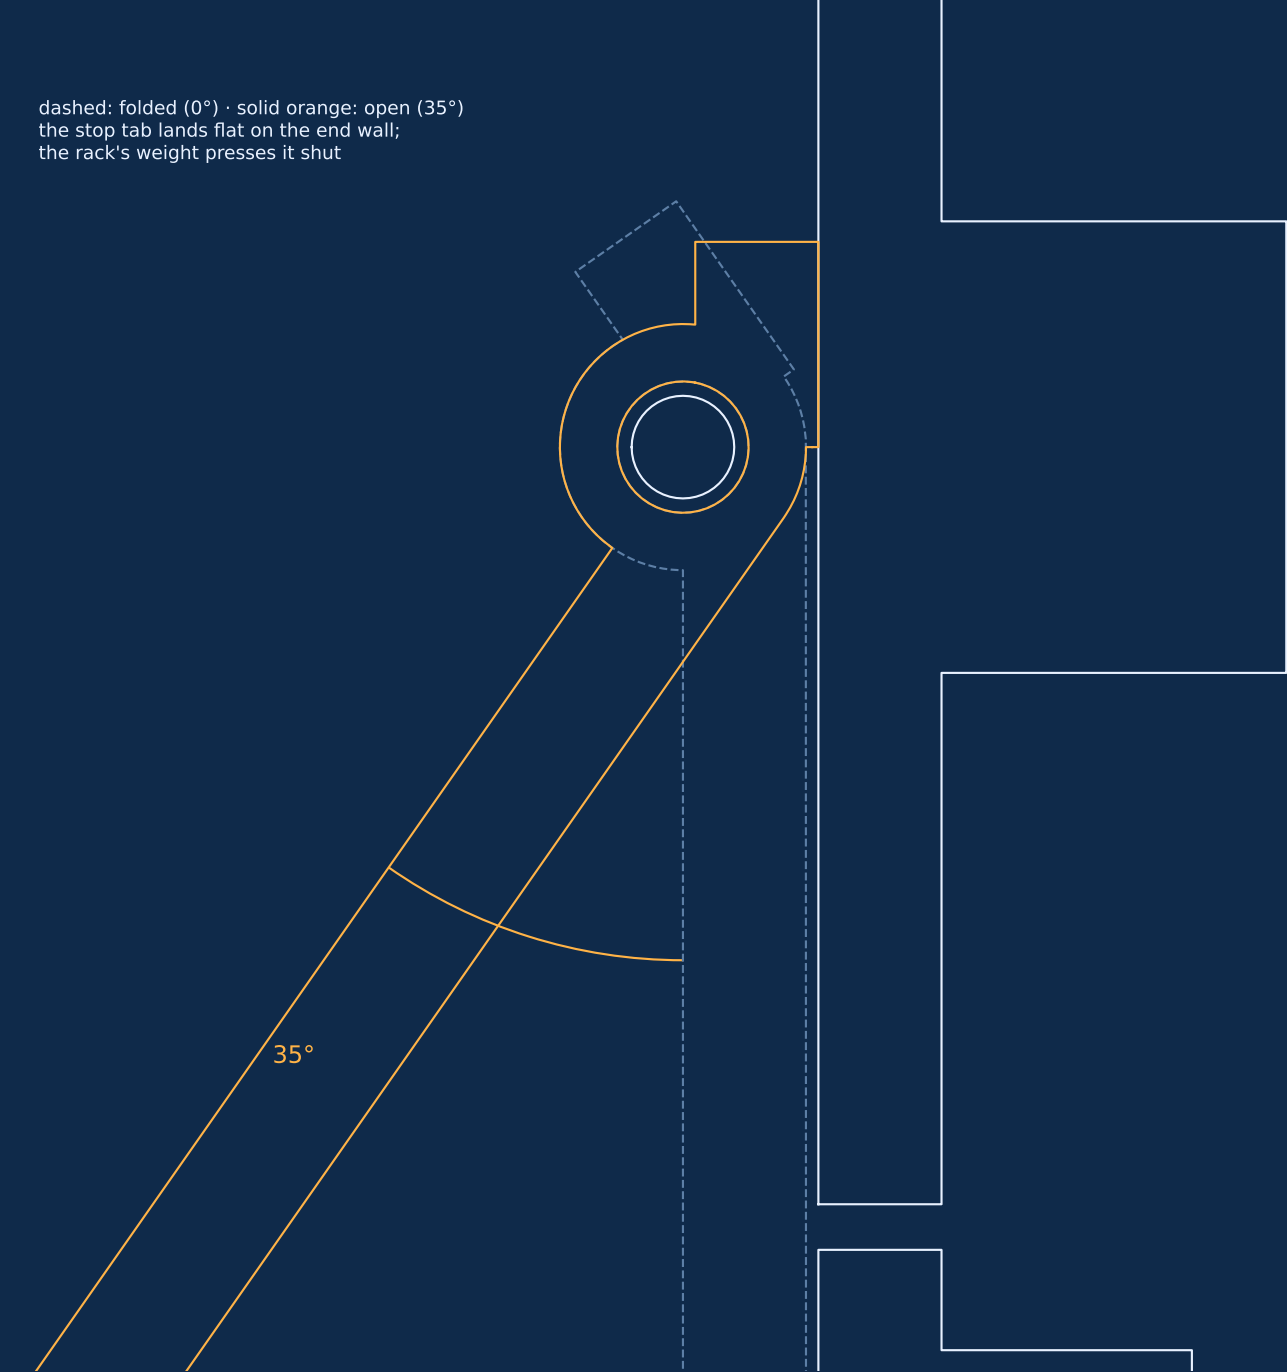

Model	3-card	5-card	6-card
File	right_fixed_rack_3card_kickstand_PRINT.stl	right_fixed_rack_5card_kickstand_PRINT.stl	right_fixed_rack_6card_kickstand_PRINT.stl
Rack height (mm)	132	242	297
Ledges · pitch · step	3 · 55 · 4.6	5 · 55 · 4.6	6 · 55 · 4.6
Hinge axis height (mm)	121	176	176
Lean when open	27.5°	25.0°	24.5°
Stand open W × D × H (mm)	136 × 83 × 126	136 × 116 × 231	136 × 131 × 284
Tip angle fwd / back / side (loaded)	24.9° / 20.7° / 20.9°	22.8° / 19.4° / 15.8°	21.5° / 14.6° / 12.5°
Printed mass (PLA, est.)	103 g	178 g	207 g
Loaded mass (cars + cards)	223 g	378 g	447 g

PRINT SETTINGS

- Orientation: as in the STL, end wall flat on the bed. No supports, no brim needed.
- PLA, 0.2 mm layers, 3 walls, 15 % infill. Keep the hinge region at ≤ 40 mm/s outer wall.
- Do not use "detect thin walls" gap fill in the hinge; first layer must not be over-squished (elephant foot closes the 0.8 mm foot gap).
- After printing: hold the rack, rotate the leg gently 0° → 35° a few times to break the hinge free.

TOLERANCES / CLEARANCES

- Pin Ø5.0 in bore Ø6.4: 0.7 mm radial. • 45° cone faces: 0.8 mm normal gap. • Leg strip to rack back: 0.6 mm.
- Leg axial play on the pin: about 1.1 mm / 1.6 mm. • Smallest gap anywhere: 0.6 mm; no contact with any 0.45 mm shift.
- Leg range: free 0°–34.8°, hard stop at 35.0°; cannot fold past 0° (rests on the rack).

USE

- Unfold the leg to its stop and stand the rack on its bottom ledge. Slide each card in from the open end until it meets the 28 mm stop.
- Fold the leg flat to store or ship: the whole stand is then 30–45 mm thick.

SLIDERACK FOLD	
SPECIFICATION · PRINT SETTINGS · TOLERANCES	
values from the verification reports in 3d-models/	SHEET 5 / 5 · UNITS: mm · A3