
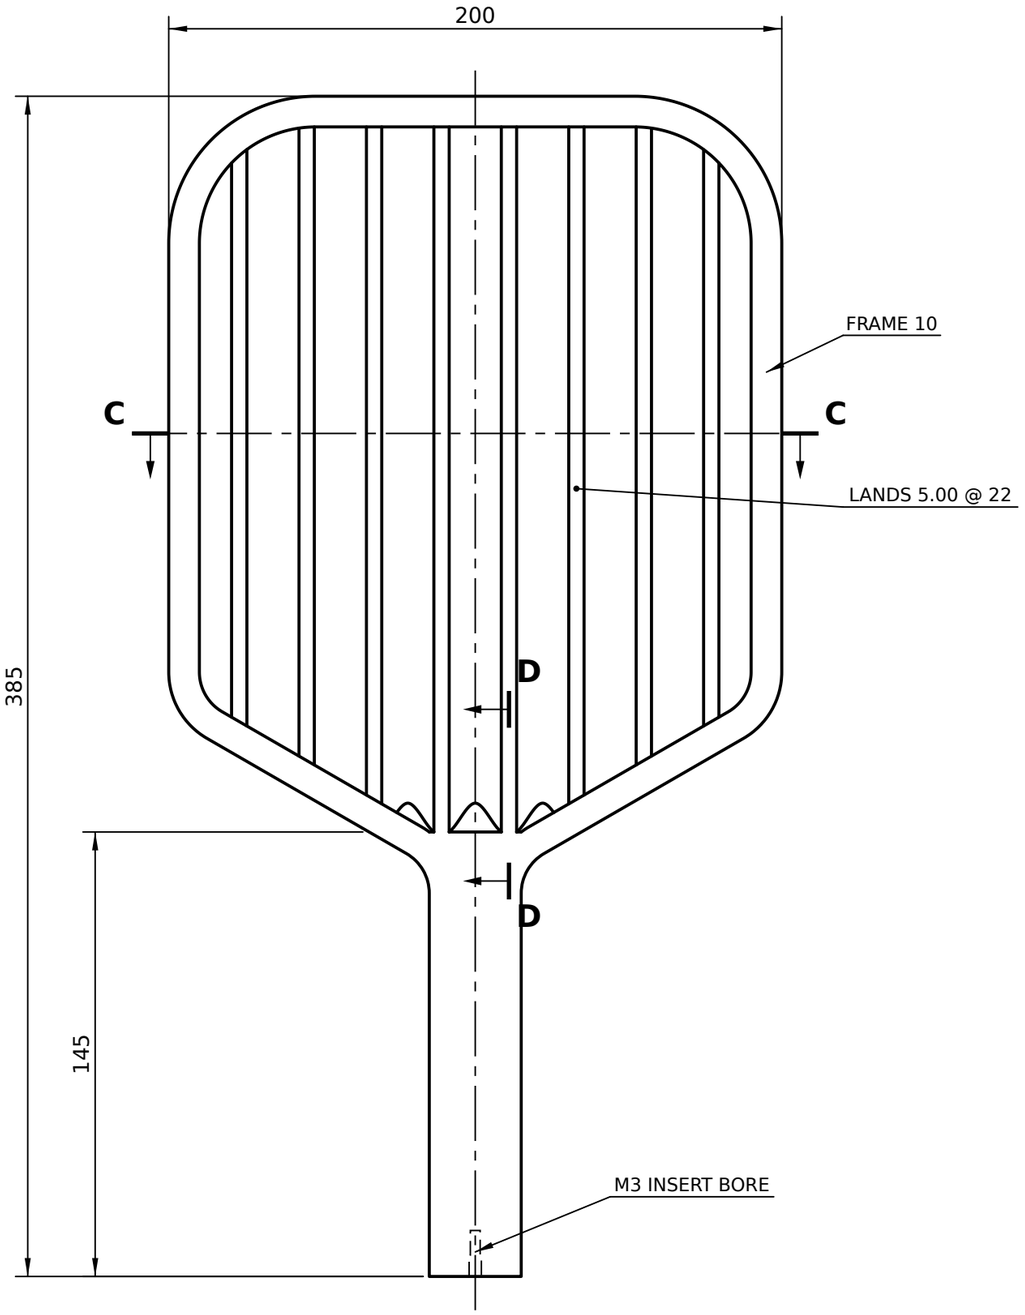



PLAN VIEW (TOP FACE)

SCALE 1:2 · BOTTOM LANDS OFFSET ½ PITCH

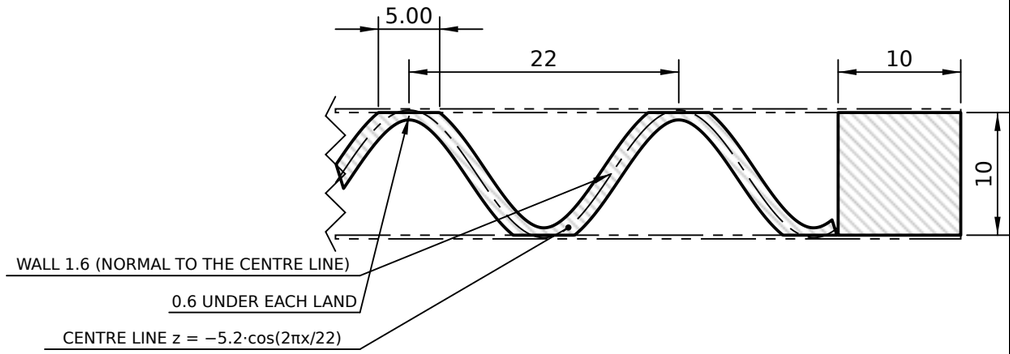

SECTION C–C (PART)

SCALE 2:1 · FACE SHEETS SHOWN PHANTOM

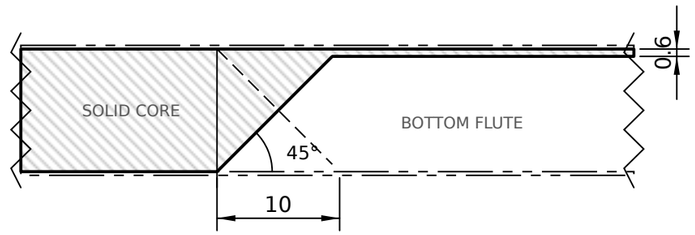

SECTION D–D (PART)

SCALE 2:1 · ON A LAND (x = 11), RAMP FROM y = 150; TOP FLUTES MIRROR IT

NOTES

1. MATERIAL: CARBON FIBRE / EPOXY, MOULDED IN ONE PIECE IN THE SHEET-4 MOULD (CHOPPED FIBRE 10–25 LONG, ≈ 40 % BY VOLUME, ρ ≈ 1.5 g/cm³). THE PRINTED STL (NOTE 8) IS A TRIAL PIECE / PRINTED ALTERNATIVE.
2. THICKNESS 10, SET BY THE MOULD (SHEET 4): LID FLANGE ON THE TRAY RIM. BOTH FACES ARE BOND SURFACES.
3. WAVE RIB λ22, 8 WAVES SYMMETRIC ABOUT THE CENTRE LINE, WALL 1.6, AMPLITUDE 5.2; LANDS 5.00 BOTH FACES.
4. FRAME 10, CLOSED. SOLID TO y = 150; EACH FLUTE ENDS IN A 45° RAMP, 10 LONG, LONGEST AT ITS OPEN FACE (D–D), SO THE MOULD TEETH PULL STRAIGHT OUT.
5. AFTER MOULDING DRILL Ø4 × 7 + Ø3.2 × 15 IN THE BUTT FACE AND BOND AN M3 BRASS INSERT (EPOXY) FOR THE GRIP SCREW – SEE PB-GR-002.
6. BONDING THE SKINS: ABRADE (P120) AND DEGREASE BOTH FACES, EPOXY, PRESS FLAT BETWEEN PLATENS OR IN A VACUUM BAG.
7. PRINT FILE output/rib_support/elongated_rib_support.stl (TRIAL PIECE: CHECKS THE MOULD CLOSES): FLAT, BED ≥ 391 × 206.
8. MASS 286 g. y FROM THE GRIP BUTT FACE (y = 0); THE RIB SUPPORT STARTS AT y = 5.

RIB SUPPORT – ELONGATED

RIB SUPPORT (CORE) · MOULDED CARBON, ONE PIECE · 385 × 200 × 10 mm

DRAWN	DATE	CHECKED	APPROVED
Claude Code	2026-11-09		

DRAWING No.	REV	SHEET	SIZE	SCALE	UNITS
PB-EL-001	G	3 / 4	A3	1:2, 2:1	mm

PROJECTION	MATERIAL	STATUS
	CARBON / EPOXY (NOTE 1)	ISSUED FOR REVIEW