FLAT BLANK outside (cosmetic) face up

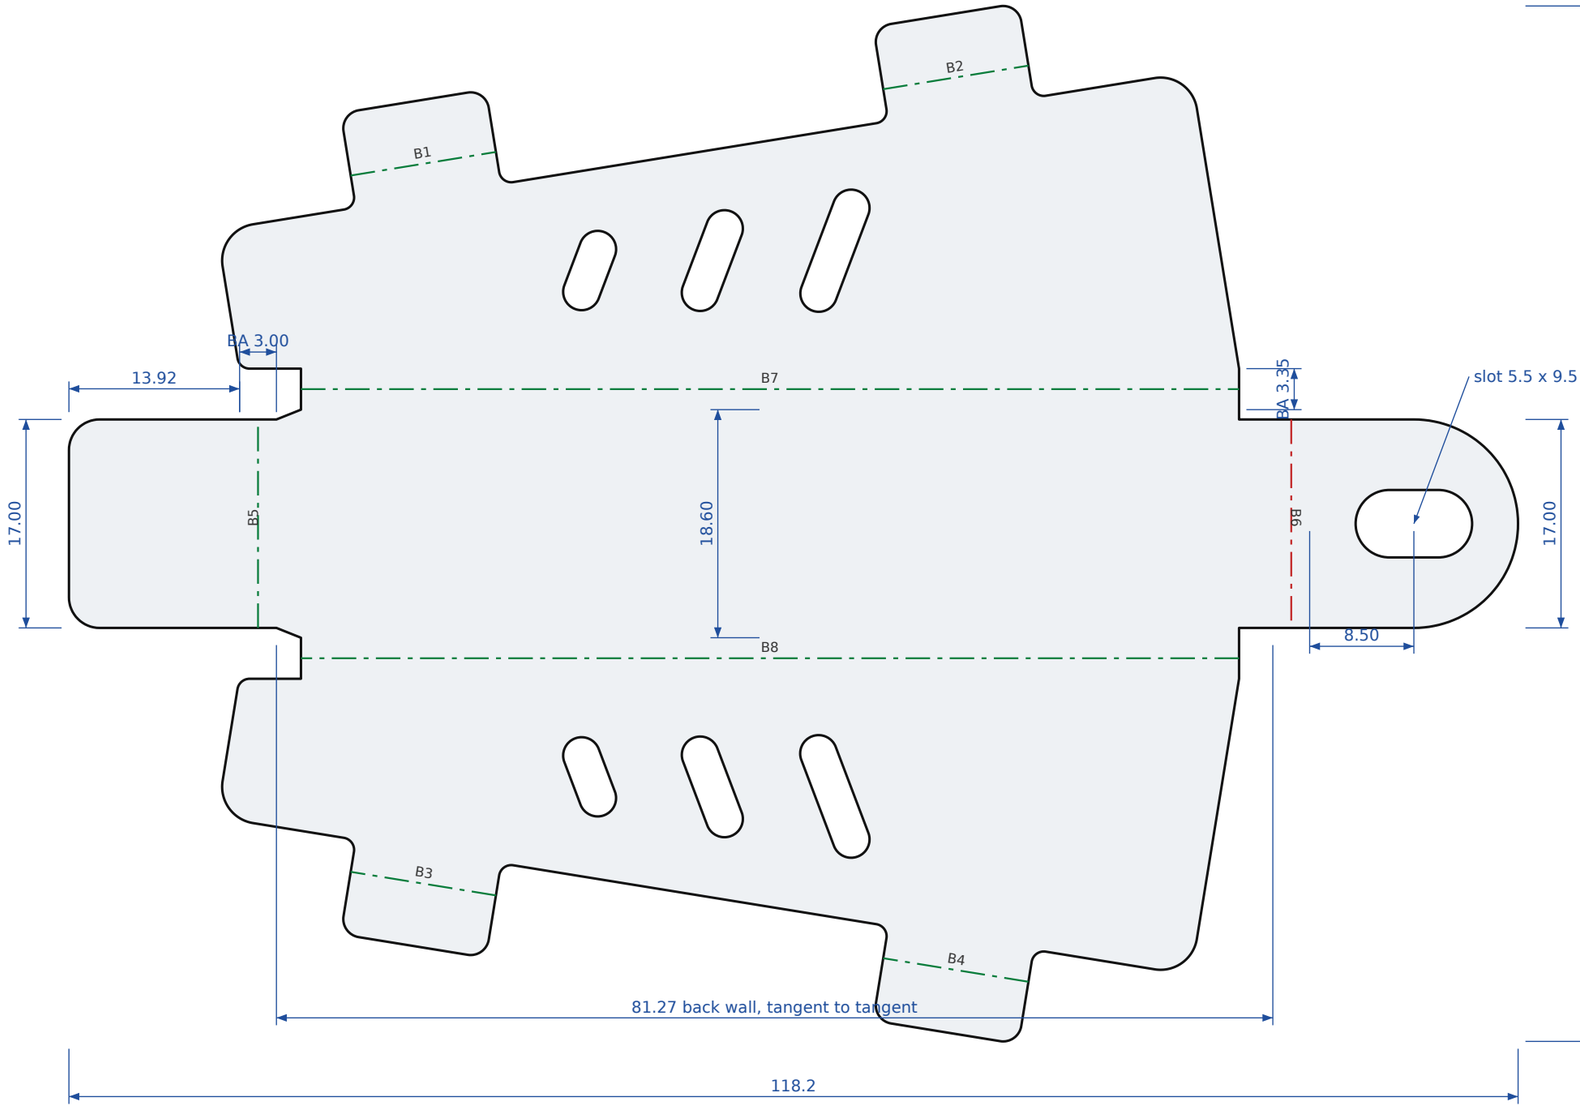

BEND TABLE (in bend order)

ID	Feature	Dir	Angle	Length	Allow.
B1	TOP TAB1	DOWN	35.0°	12.0	1.30
B2	TOP TAB2	DOWN	35.0°	12.0	1.30
B3	BOTTOM TAB1	DOWN	35.0°	12.0	1.30
B4	BOTTOM TAB2	DOWN	35.0°	12.0	1.30
B5	TIP	DOWN	80.8°	17.0	3.00
B6	EAR	UP	80.8°	17.0	3.00
B7	TOP	DOWN	90.0°	76.5	3.35
B8	BOTTOM	DOWN	90.0°	76.5	3.35

DOWN = flange folds away from viewer

UP = flange folds towards viewer

Blank 118.2 x 84.4, area 5679 mm², cut length 563 mm, 8 pierces.
Bend lines are bend centre lines.
Bend allowance = angle x (R + K t), R 1.5, K 0.42.
Adjust K to your tooling and re-run build.py;
the inside dimensions are held, the blank changes.
Form tabs B1-B4 first, then B5, B6, then the two
long bends B7, B8 over a 21.6 mm form block or with
a gooseneck punch (channel is deeper than it is wide).
Tabs may be trimmed to the lamp by hand with
pliers after the liner is fitted.
Grain along the long bends if the sheet allows.

REV A: lamp and mount dimensions are scaled from photographs, not measured. Confirm M1-M8 on a real lamp before cutting metal.

KTM indicator slip-on cap - flat blank

Laser profile and bend lines. The DXF is the master for cutting.

Material: Stainless steel 304, 1.5 mm, 2B Inside bend radius 1.5 K 0.42 mass 68.6 g	Drg IC-390A-01 Rev A Sheet 2 of 2 Scale 2:1
Finish: deburr all edges, bead blast, black textured powder coat Tolerances: cut ±0.15 formed ±0.5 bends ±1°	Date 2026-11-14 Units mm 3rd-angle views