
07 VORONOI-CORE

Voronoi rib lattice with recessed cells between rounded ribs.

59.5 g

PLA · 100 % infill · sealed core

✓ LIGHTENED CORE · SLOT + HOLE

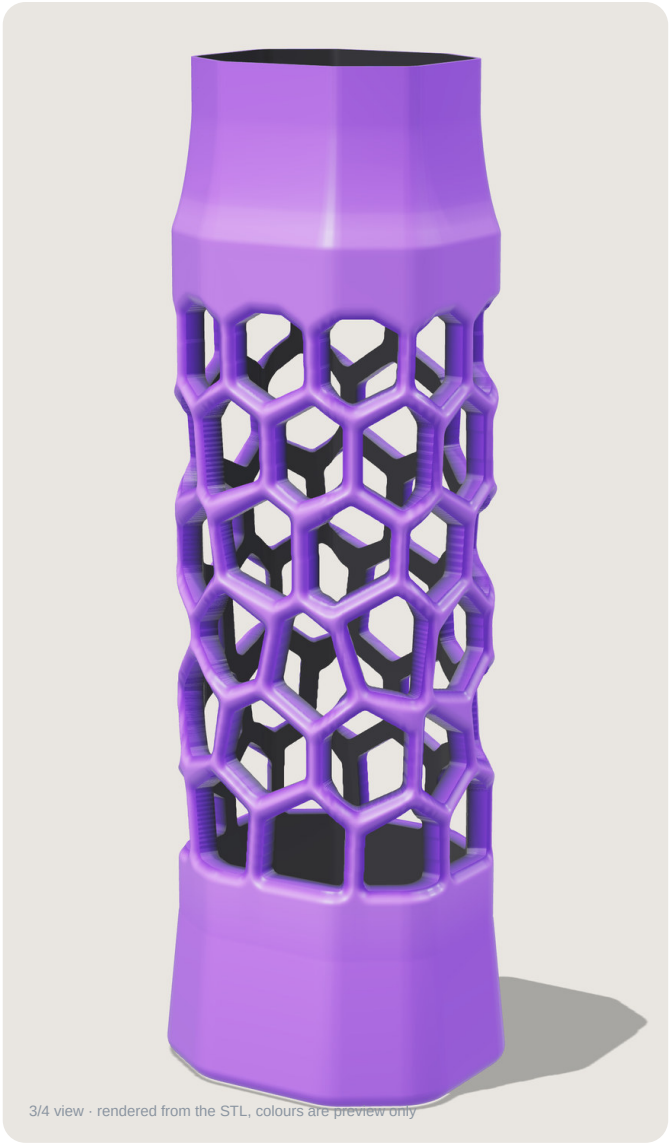


3/4 view · rendered from the STL, colours are preview only

AT A GLANCE

Overall height	**135.00 mm**
Max footprint (foot)	**42.63 × 36.61 mm**
Paddle slot	**30.2 × 16.2 mm, 130.0 deep**
Textured band	**z 21.5 – 116.0 mm (94.5 tall)**
Outer size in band (max)	**39.1 × 33.0 mm**
Peak texture height	**3.50 mm above base**
Screw hole (butt)	**Ø 3.5 mm + Ø 6.2 × 3.2 counterbore**
Material volume / surface	**47.95 cm³ / 475 cm²**

WEIGHT · 100 % INFILL

PLA	1.24 g/cm³	**59.5 g**
PETG	1.27 g/cm³	**60.9 g**
TPU	1.21 g/cm³	**58.0 g**
ABS	1.04 g/cm³	**49.9 g**



COLOURWAY

#8A54E4

3MF print palette

PRINT PROFILE

Infill / layer height	**100 % / 0.20 mm**
Layers	**675**
Orientation	**upright, butt end down**
Supports	**none required**
Sealed hollow core	**31.6 cm³, walls ≈ 1.2 mm**
Filament, 1.75 mm	**≈ 19.9 m (100 % flow)**

DESIGN INTENT

Irregular Voronoi cells become 2.6 mm ribs with rounded crests, and the cells between the ribs are recessed about 1 mm. The lattice is relaxed for even cells but keeps a natural irregularity. Like the other nine it is filled, with a sealed hollow core in the walls.

Rib flanks rise at no more than 45 degrees, so no supports are needed.

KEY FEATURES

- 54 recessed cells in the band z 27.5 – 103.5 mm
- 2.6 mm ribs standing at the full 3.5 mm crest
- Cell floors 2.46 mm above base, about 1 mm below the rib crests


VERIFIED ON THE STL

Paddle slot	**30.2 × 16.2 mm (30 × 16 + 0.2)**
Screw hole + counterbore	**Ø 3.5 mm + Ø 6.2 × 3.2**
Outer envelope vs reference	**+0.003 mm at most**
Outer body / sealed cavity	**1 / 6**
Wall around the cavity (min)	**1.14 mm**
Material under 0.4 mm wide	**0.001 % of volume**
Widest flat bridge	**3.7 mm**

FILES

stl/07_voronoi_core.stl	11.3 MB · 225,794 triangles
3mf/07_voronoi_core.3mf	2.4 MB · colour

✓ SLOT & HOLE VERIFIED ✓ ONE BODY · SEALED CORE ✓ PRINT-READY · 0.20 MM LAYERS ✓ 3MF VALIDATED

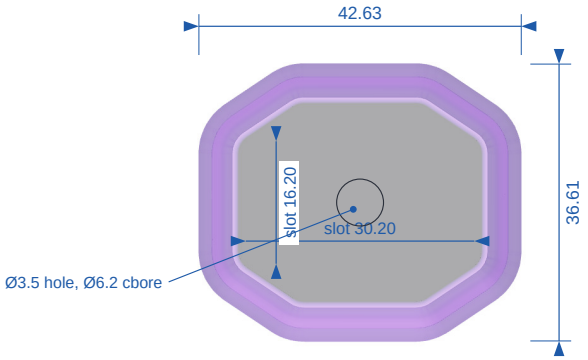


TOP VIEW (from +Z)

KEY DIMENSIONS

Overall height	**135.00**
Overall width × depth (foot)	**42.63 × 36.61**
Paddle slot width × depth	**30.20 × 16.20**
Slot depth (floor at z 5.0)	**130.00**
Outer W × D, textured band (max)	**39.06 × 33.04**
Foot top (z 20)	**39.16 × 33.13**
Butt face (z 0)	**40.56 × 34.54**
Peak texture height above base	**3.50**
Screw hole / counterbore	**Ø 3.50 / Ø 6.20 × 3.2**

All values in mm. Dashed lines: paddle slot and screw hole (hidden edges). Renders are the actual STL surface.

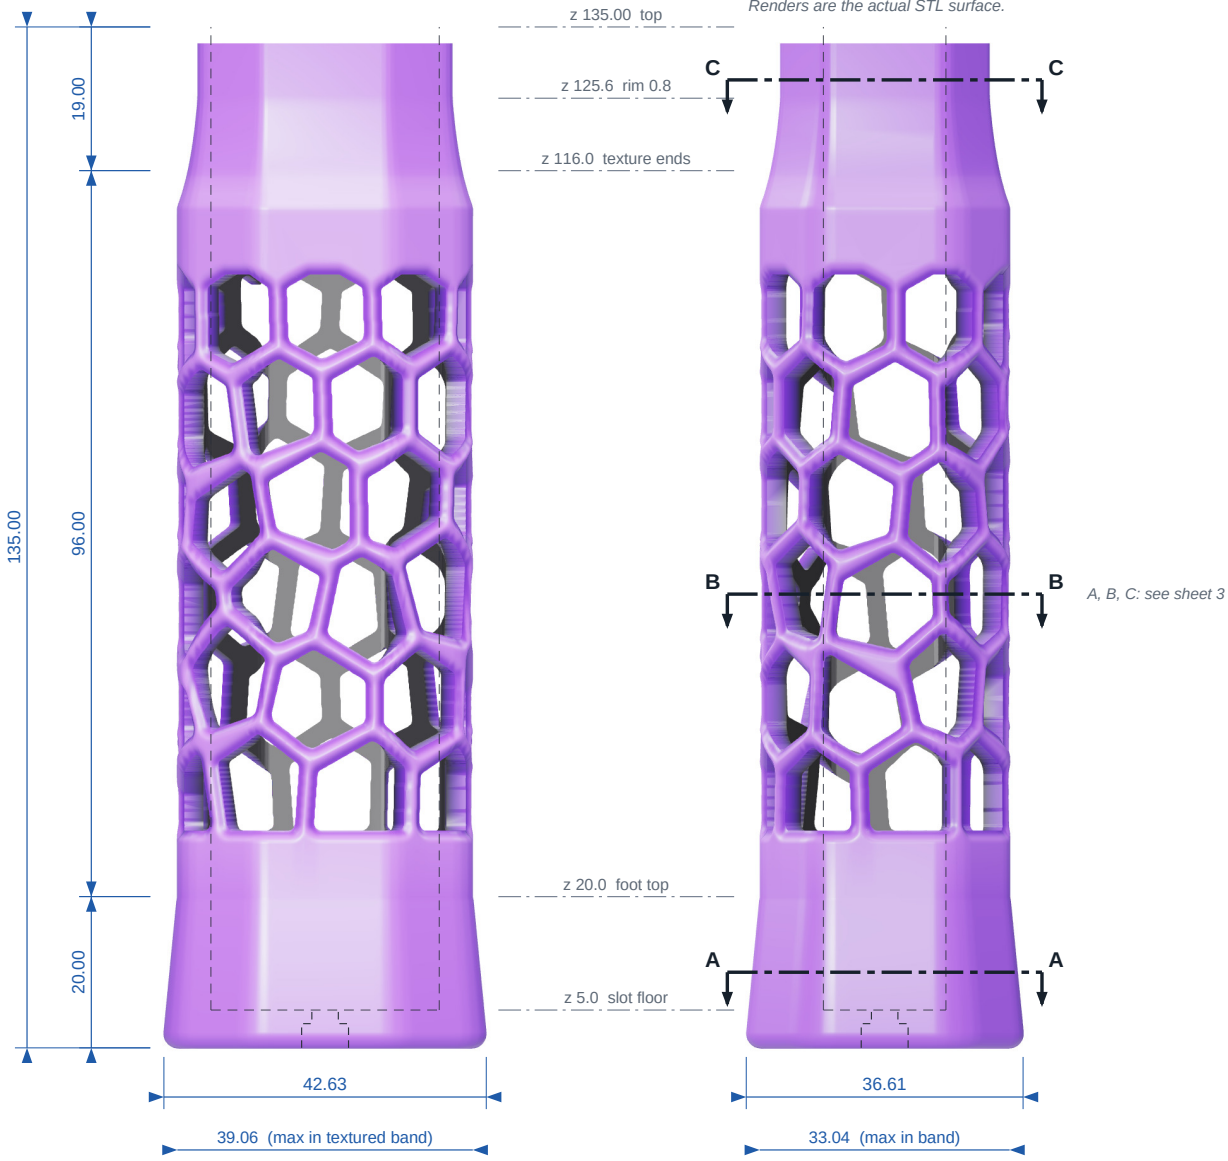

A, B, C: see sheet 3

FRONT VIEW (from −Y)

RIGHT VIEW (from +X)

SCALE 1 : 1



PART

VORONOI-CORE

Pickleball paddle grip sleeve, closed butt, open throat

GENERAL NOTES


1. Views are true size: print this sheet at 100 %, do not fit to page.
2. Dimensions are measured from the STL, not nominal.
3. Sealed hollow core, walls ≈ 1.2 mm; head above z 110 is solid.
4. Outer envelope matches the reference PickleballGrip_1.3mf (rim held ≥ 0.8 mm).

SCALE **1 : 1**	UNITS **millimetres**	PROJECTION
MATERIAL **PLA / PETG / TPU**	INFILL **100 %**	LAYER HEIGHT **0.20 mm**
MASS (PLA) **59.5 g**	VOLUME **47.95 cm³**	SURFACE AREA **475 cm²**
REVISION **5**	DATE **2026-10-19**	SHEET **2 of 4**

Sections & profiles


True-size cross-sections, how the outer surface and material change with height, and the dimension tables.

SECTION A–A z = 10 mm · foot

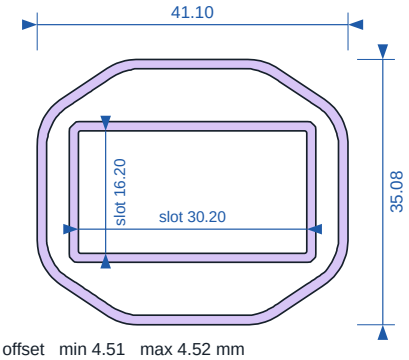


Skin offset min 4.51 max 4.52 mm
Area 278 mm² · outer perimeter 128.9 mm

SECTION B–B z = 60 mm · textured band

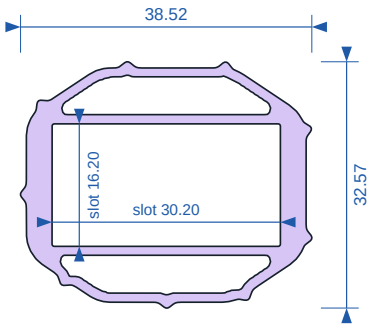


Skin offset min 2.46 max 3.29 mm
Area 303 mm² · outer perimeter 118.3 mm

SECTION C–C z = 128 mm · rim




Skin offset min 0.79 max 0.80 mm
Area 344 mm² · outer perimeter 105.5 mm

OUTER OFFSET FROM THE REFERENCE OUTLINE VS HEIGHT

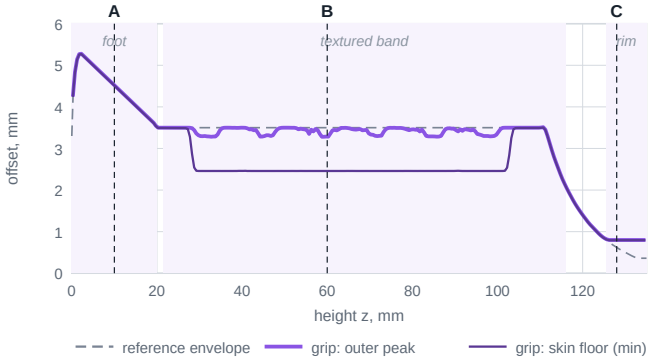

MATERIAL CROSS-SECTION AREA VS HEIGHT

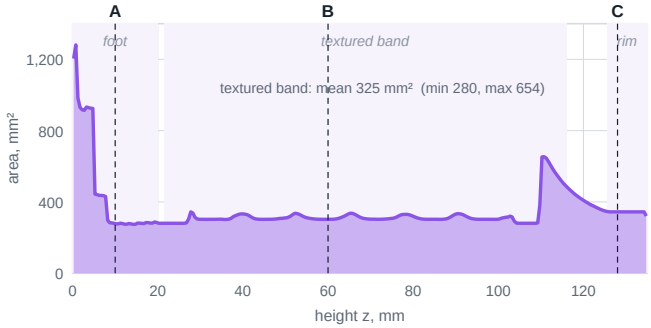

OVERALL & SLOT

Overall length (Z)	**135.00 mm**
Overall width (X)	**42.63 mm**
Overall depth (Y)	**36.61 mm**
Slot width × depth	**30.20 × 16.20 mm**
Slot area / perimeter	**489.2 mm² / 92.3 mm**
Slot depth (floor at z 5.0)	**130.00 mm**
Screw hole / counterbore (butt)	**Ø 3.50 / Ø 6.20 × 3.2**
Sealed cavity / min wall	**31.6 cm³ / 1.14 mm**
Outer W × D in band (max)	**39.06 × 33.04 mm**
Material volume / surface	**47.95 cm³ / 475.3 cm²**

ZONES BY HEIGHT

ZONE	Z FROM	Z TO	HEIGHT
Solid floor (butt)	0.0	5.0	**5.0**
Flared foot	0.0	20.0	**20.0**
Smooth collar	20.0	21.5	**1.5**
Textured band	21.5	116.0	**94.5**
Smooth neck (taper)	116.0	125.6	**9.6**
Rim (flat top, slot opening)	125.6	135.00	**9.4**

Relief floor above reference line (design / min)	**1.20 / 2.46 mm**
Min skin at the neck (design / measured)	**0.80 / 0.80 mm**
Peak texture height above base	**3.50 mm**

OUTER DIMENSIONS BY HEIGHT


Z (MM)	OUTER W	OUTER D	PERIMETER	AREA MM²	SKIN MIN	PEAK OFFSET
5.0	42.08	36.06	132.0	684	5.00	5.01
10.0	41.10	35.08	128.9	278	4.51	4.52
20.0	39.11	33.09	122.6	282	3.52	3.52
30.0	38.63	32.65	118.1	303	2.46	3.31
45.0	38.57	32.62	118.3	302	2.46	3.29
60.0	38.52	32.57	118.3	303	2.46	3.29
75.0	38.81	32.61	118.5	308	2.46	3.50
90.0	38.91	32.86	120.5	331	2.46	3.46
105.0	39.06	33.04	122.5	281	3.49	3.50
116.0	36.27	30.24	113.7	487	2.10	2.10
125.0	33.77	27.75	105.8	350	0.85	0.85
132.0	33.66	27.64	105.5	344	0.80	0.80


Views & surface

Four-way turntable, close-ups of the surface, and the unrolled height map with the design parameters.




Four views, 90° apart · rendered from the STL, colours are preview only

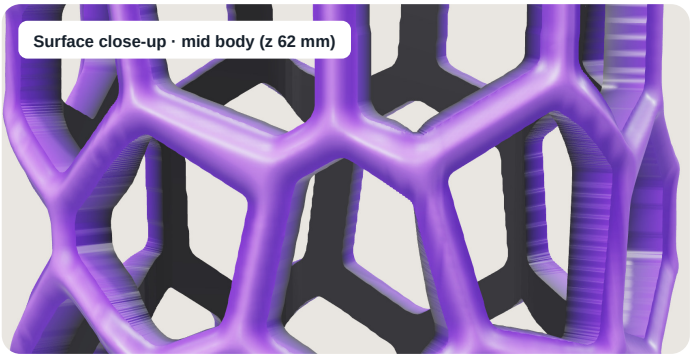

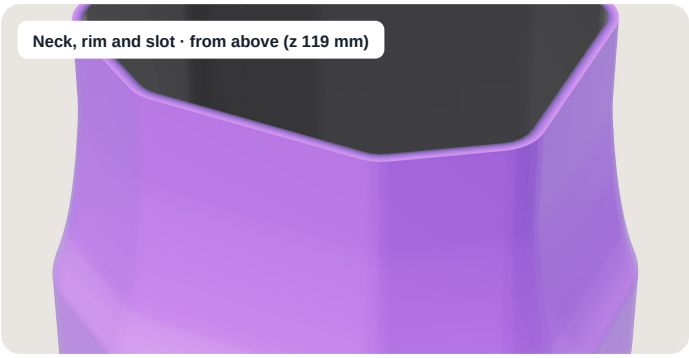

UNROLLED SURFACE · HEIGHT ABOVE BASE

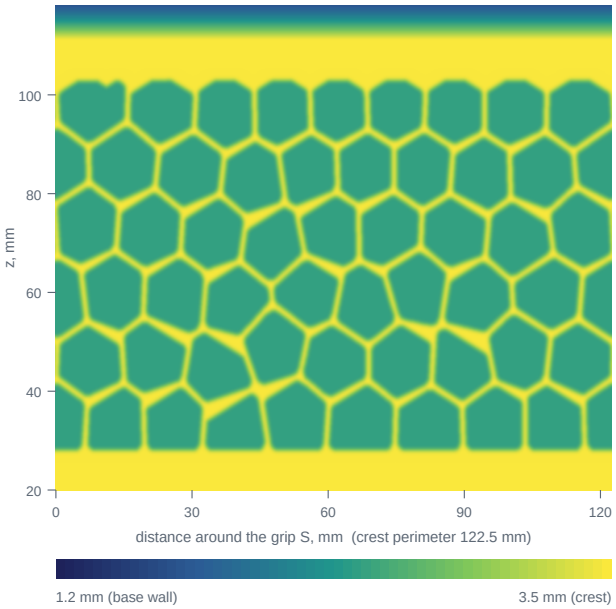

DESIGN PARAMETERS

Cells	**54, recessed about 1 mm**
Rib width	**2.6 mm**
Rib height	**3.50 mm above base**
Textured band	**z 27.5 – 103.5 mm (76 mm)**
Cell corner radius	**1.0 mm**
Cell floor	**2.46 mm above base**
Recessed area	**about 64% of the band**

PRINT & VERIFICATION

Result: slot & hole / print-ready	**PASS / PASS**
Outer body · genus · sealed cavity	**1 · 1 · 6**
Wall around the cavity (min)	**1.14 mm**
Paddle slot	**30.2 × 16.2 mm**
Envelope over reference	**+0.003 mm**
Material under 0.4 mm wide	**0.001 %**
Widest flat bridge	**3.7 mm**