
DESIGN 08 OF 10

TOPO-FLOW

Continuous undulating contours, like wood grain and terrain.

THE DESIGN

The surface is a contour map with four wood-like knots. Ridges follow the contours so the lines flow around the handle like grain in a cut log, giving directional grip that is softer on the hand than sharp knurling.

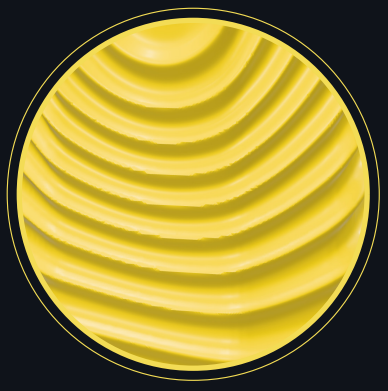


CLOSE-UP · MID BODY

62.4 g
PLA, SEALED CORE

4
KNOTS

3.13 mm
PEAK RELIEF

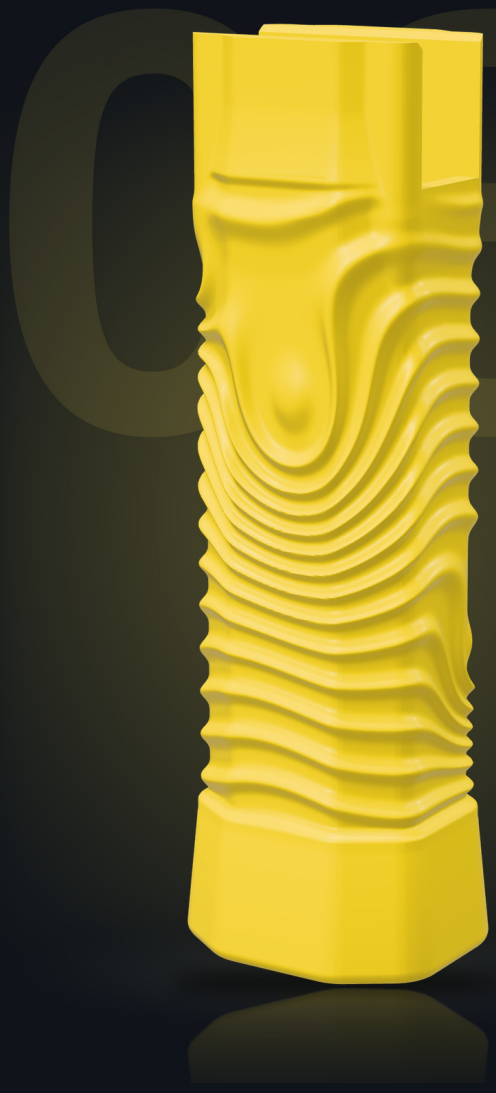

THE HANDLE

A sleeve that slides over your paddle's flat handle: a 30.2 × 16 mm slot (the 30 mm wide handle plus 0.2 mm, 16 mm thick), 130 mm deep so the paddle seats fully, with a solid 5 mm base and a counterbored 3.5 mm hole that takes a low-head M3 cap screw flush. The head is solid, with both short side walls of the slot slit open at the top so the flared throat of the paddle slides in smoothly; a sealed hollow core lightens the rest. The outer shape is the same on all ten designs.

135 mm	30 × 16 mm	130 mm	M3 low-head
LENGTH	PADDLE SLOT	SLOT DEPTH	SCREW, FLUSH

CHOOSE YOUR COLOUR

DESIGNER'S PICK: CITRUS YELLOW




Topo-Flow, all round.


Four views, four surfaces and the idea behind the design. Shown as it prints: one solid PLA colour.




3/4 VIEW · TURN 0°

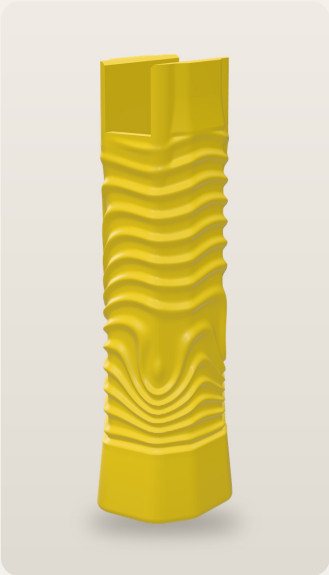

SIDE VIEW · TURN 90°

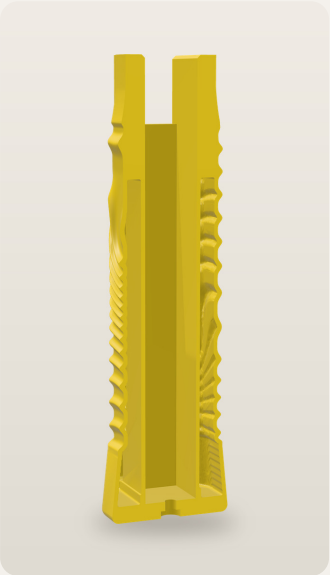

CUTAWAY · HOLLOW CORE

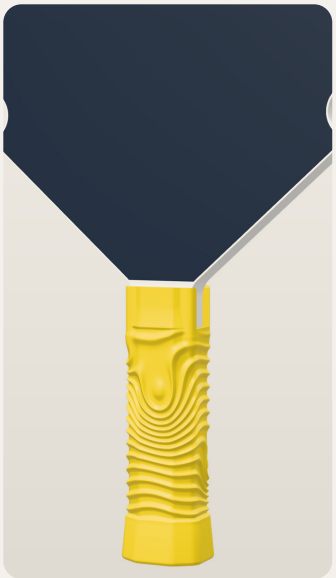


ON A PADDLE · ILLUSTRATION



CLOSE-UP · MID BODY



RIM & SLOT · FROM ABOVE



UNROLLED · LIT RELIEF



BUTT · Ø3.5 HOLE + CBORE



DESIGN INSPIRATION

Topographic maps and the growth rings of a sawn log. Nature draws the same flowing lines wherever a surface is shaped gradually, and here they lead your fingers around the handle.


WHY IT GRIPS

- Four knots, contour ridges 2.5–7 mm apart
- Rounded crests about 3.1 mm, valleys 1.66 mm
- Ridge flanks stay under 45°

PRINT TIP

Ridge flanks are rounded and below 45°; the grain is geometry, not colour.

THE WHOLE COLLECTION

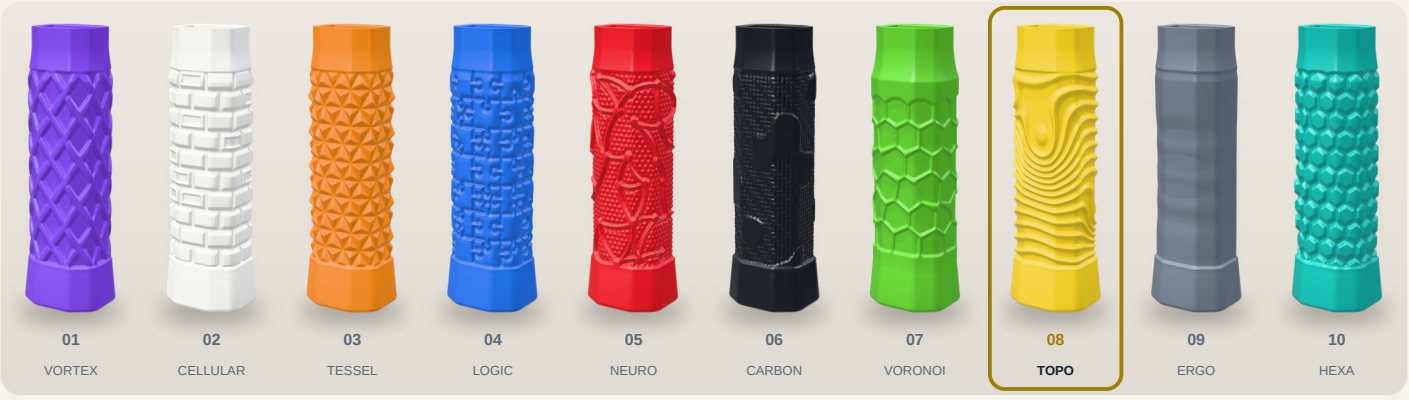

The paddle in the illustration is generic, drawn with your 30 × 16 mm handle. Every design prints in any of the ten PLA colours shown on page 1. 100 % infill · 0.20 mm layers · upright, butt end down.