



FRONT ELEVATION

scale 1:3 · cards omitted

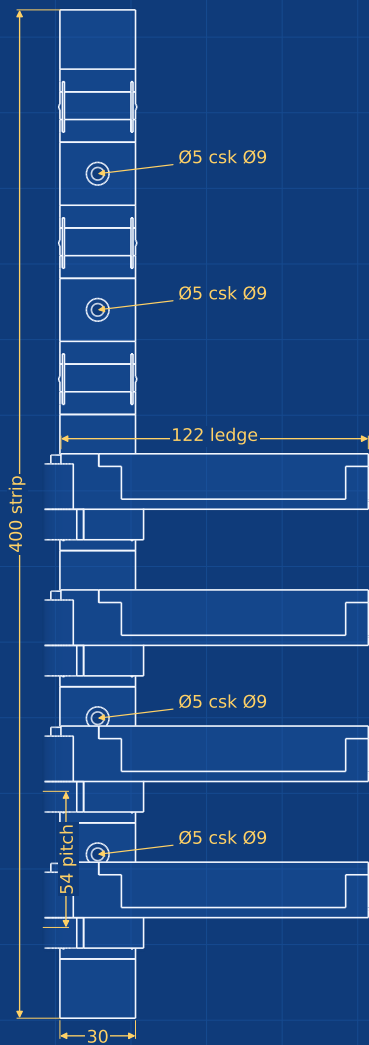


SIDE ELEVATION

scale 1:3 · from the left

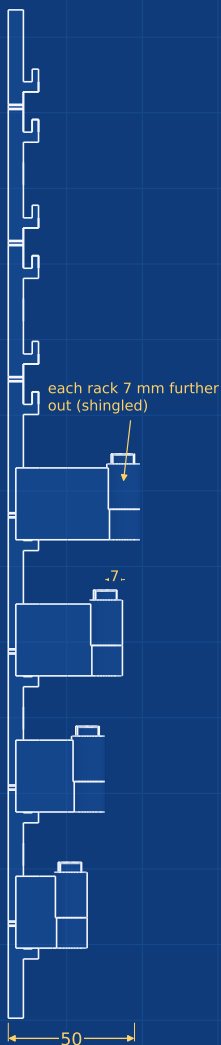


ASSEMBLED · 4 CARDED CARS

isometric · not to scale · every card name stays visible

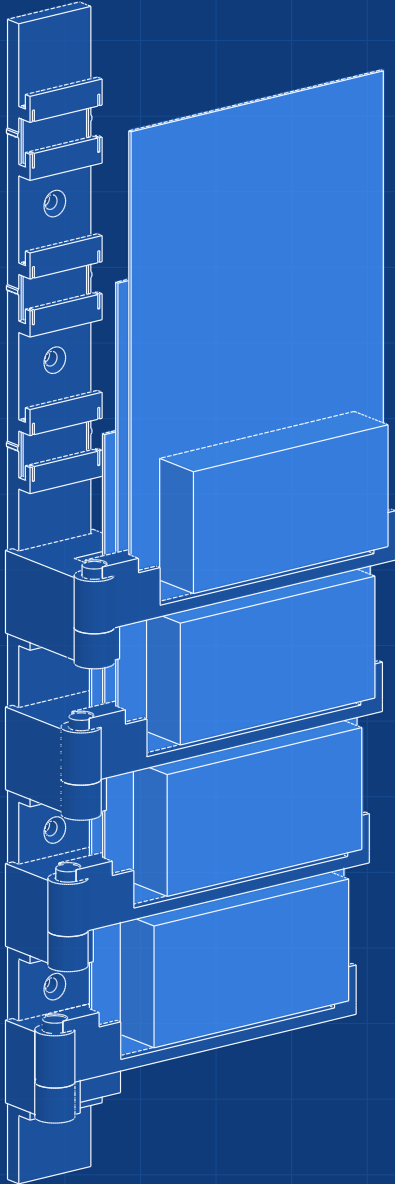

EXPLODED VIEW

isometric · one rack

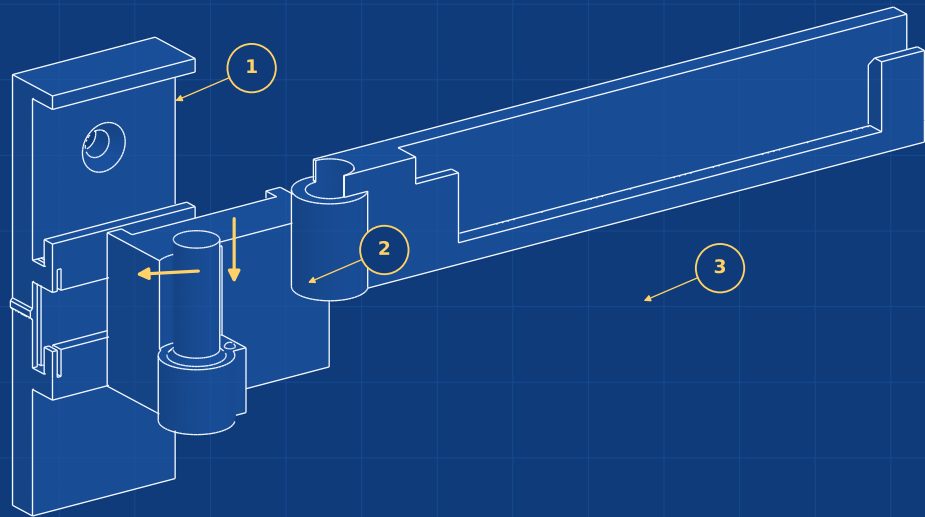


ITEM	PART	QTY (4-car)	PRINT
1	Wall strip 30 x 6 x 400 (or 2 halves, C-interlock)	1	flat, back down
2	Hinge clip, depth j = 0..3 (one each)	4	standing
3	Ledge 128.6 long, 1.8 mm card slot	4	standing
4	Lock pin 3 x 3 mm (one per clip, stops the clip lifting)	4	flat
Kits: 2-7 cars on one 40 cm strip (54 mm apart). 14 cars: second strip 491 mm higher, clips j0-j6 again. Strips join with the C-interlock; clips need no tools.			

OPERATION SEQUENCE


how the product works

1 SCREW THE STRIP

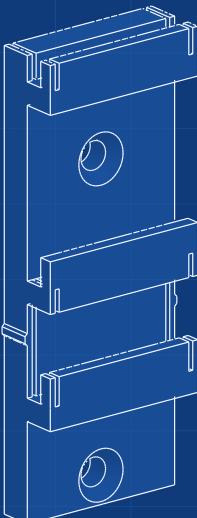


3 countersunk screws; hook lips face up

2 HANG THE CLIP

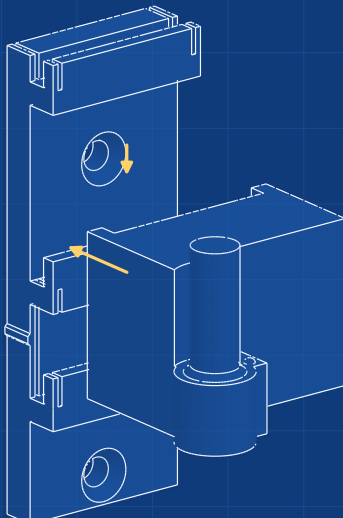


drop it on the lip pair: 2 L-hooks catch

3 DROP THE LEDGE ON THE PIN

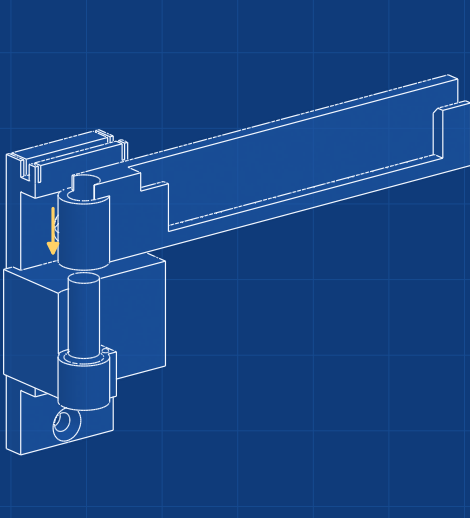

it clicks shut on the detent bump

4 LIFT 1 mm, SWING 10-40°, SLIDE CARD IN


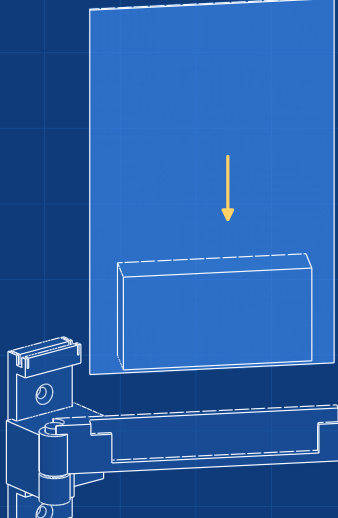


close it: the solid block stops it at 0°


PRODUCT	PITLANE hinged wall rack for carded 1:64 die-cast
DRAWING	General arrangement & operation
SOURCE	build_board.py (v3) units: mm
SCALE	as noted (1:2 orthographic, iso NTS)
MATERIAL	PLA / PETG, 0.2 mm layers, no supports
DATE	2026-10-04
SHEET	1 of 2

1 WALL STRIP

front & side 1:3 · details 3:1 / 2:1

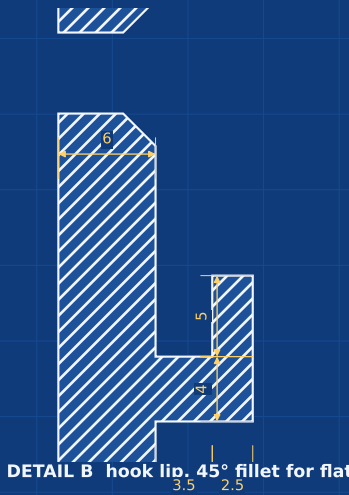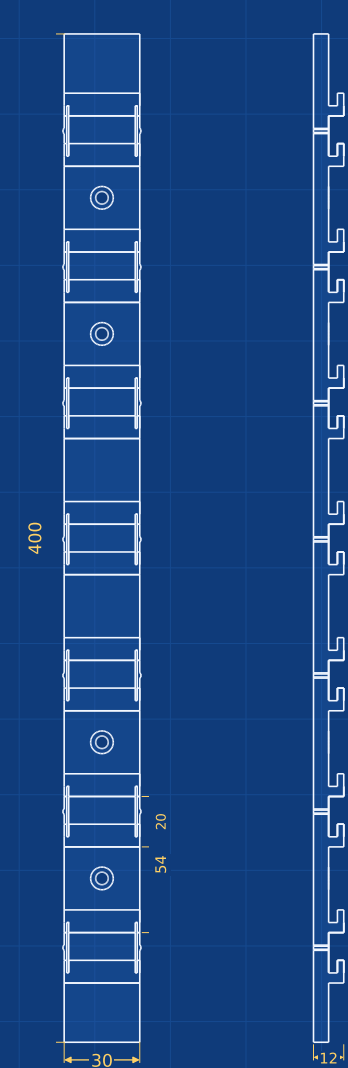

DETAIL B hook lip, 45° fillet for flat printing (3:1)




DETAIL C C-interlock of the 2-piece strip (2:1)

full thickness; locks up/down/left/right; press on from the front

2 HINGE CLIP (depth j = 0 shown)

front / side / top 1:1 · iso NTS


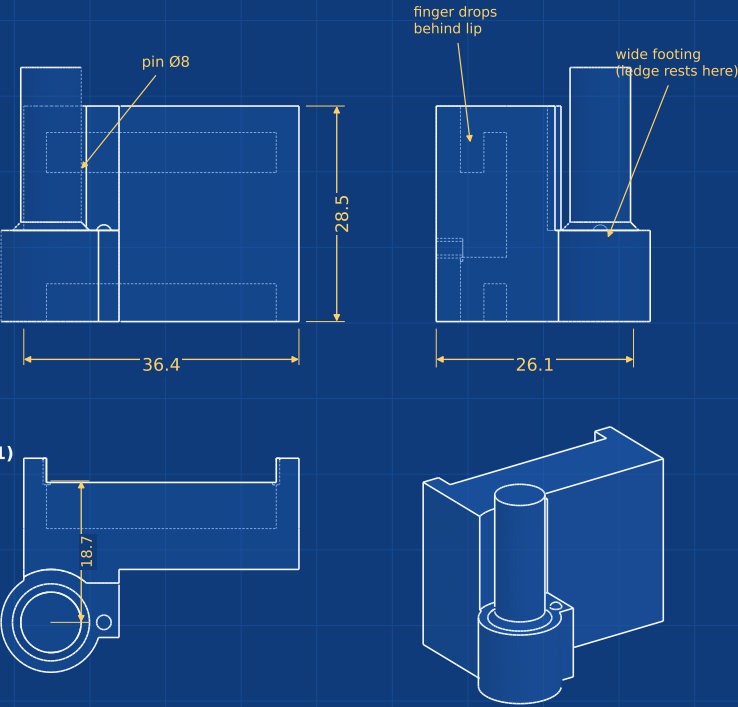


j	pin from strip	block depth
0	18.7	5.4
1	25.7	11.3
2	32.7	11.3
3	39.7	11.3
4	46.7	11.3
5	53.7	11.3
6	60.7	11.3

Clip j sits 7 mm deeper per rack.
Hang: lift 5.3 mm over the lip.
Cheeks: 0.2 mm each side of strip.
Pin-to-barrel clearance 0.2 mm.
Nothing right of pin + 9 mm in the card lane (cards start at 15).


3 LEDGE

top 1:1 · front 1:1 · section D-D 3:1 · iso NTS

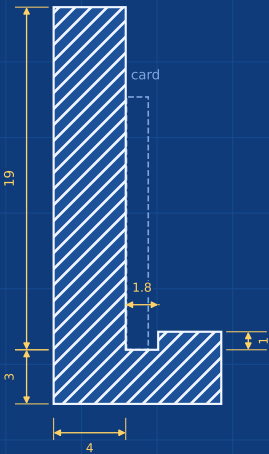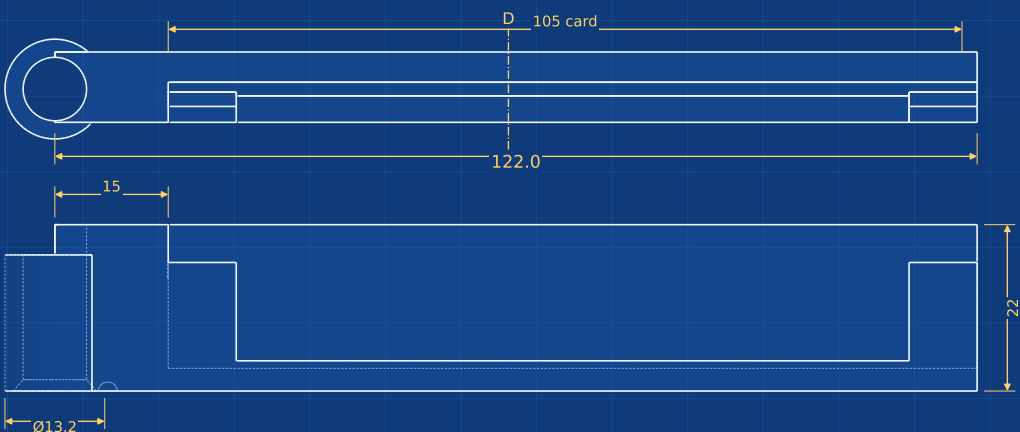


SECTION D-D (3:1)

back wall 19, front lip 1, front corner posts 14

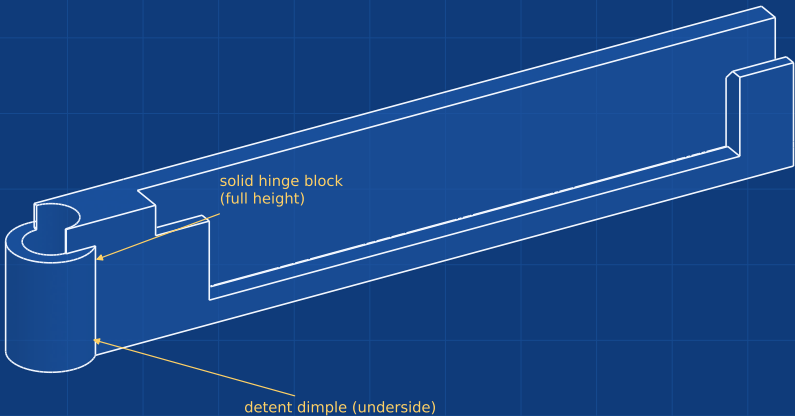

HINGE FUNCTION

section through the pin axis, 2:1 · ledge closed / lifted & opening

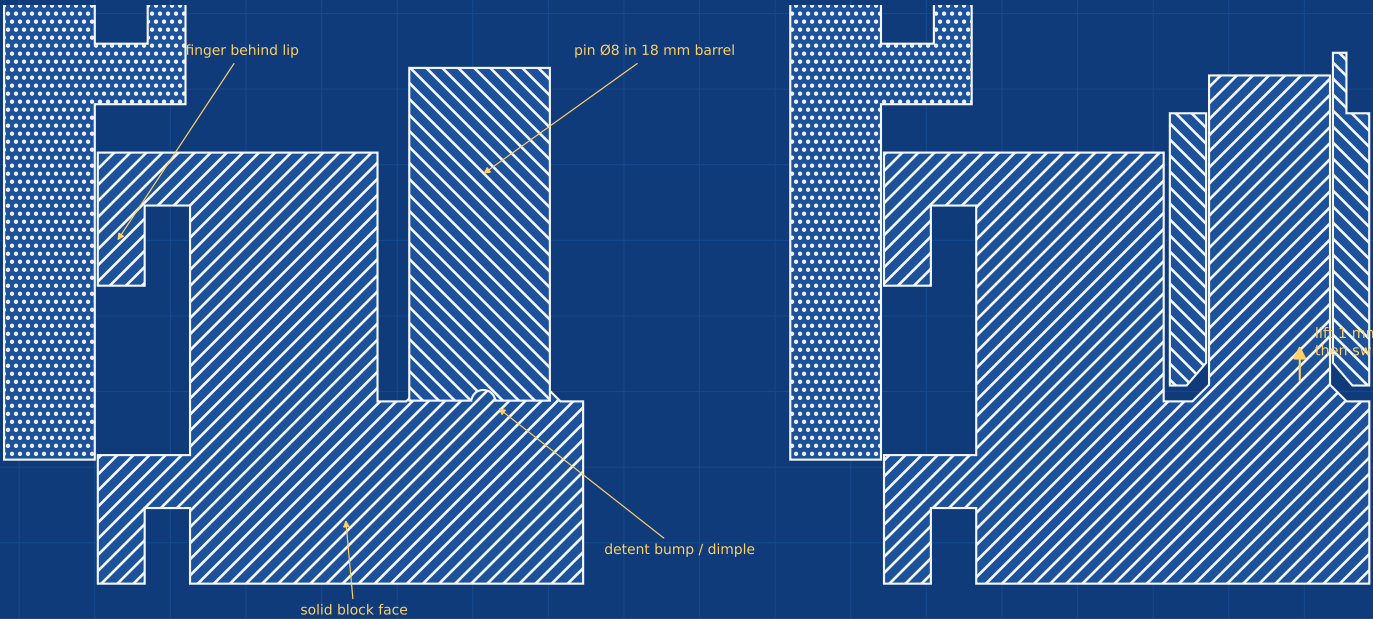

NOTES

- Card: ~105 x 165 mm, 1.2 mm thick, blister up to 42 mm. Slot 1.8 mm.
- Clip: double L-hook - fingers behind both lips of a pair; cheeks stop twisting.
- Ledge rests on the wide footing; the solid block stops it at 0°, bump holds it closed.
- To load: open the ledges above, lift 1 mm, swing 10-40°, slide card down.
- No supports: strip flat (back down), clip & ledge standing.
- Fit verified on the CAD model by boolean collision checks (hang, lift-off, swing, stop, card loading, strip joint). Print tolerances may need tuning.

PRODUCT	PITLANE hinged wall rack for carded 1:64 die-cast
DRAWING	Part details
SOURCE	build_board.py (v3) units: mm
SCALE	as noted on each view
MATERIAL	PLA / PETG, 0.2 mm layers, no supports
DATE	2026-10-04
SHEET	2 of 2