


80 ms = real time

mlx-community 4-bit

185.2 ms

IPSupport GPTQ-3 + fork

87.7 ms

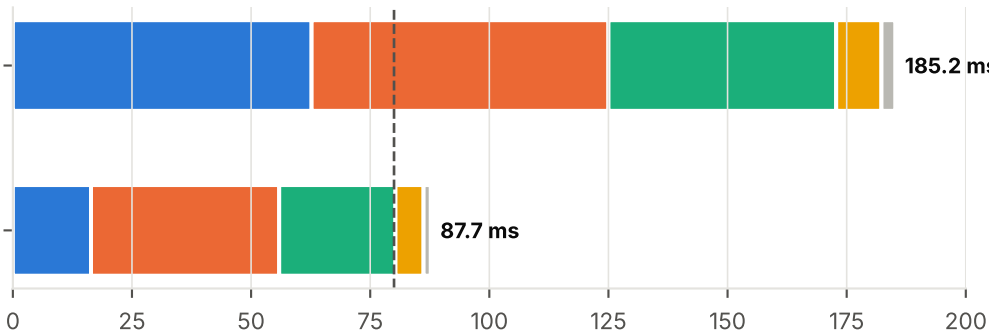

ms per 80 ms duplex frame, base M5 (lower is better)

perception LLM TTS codec other