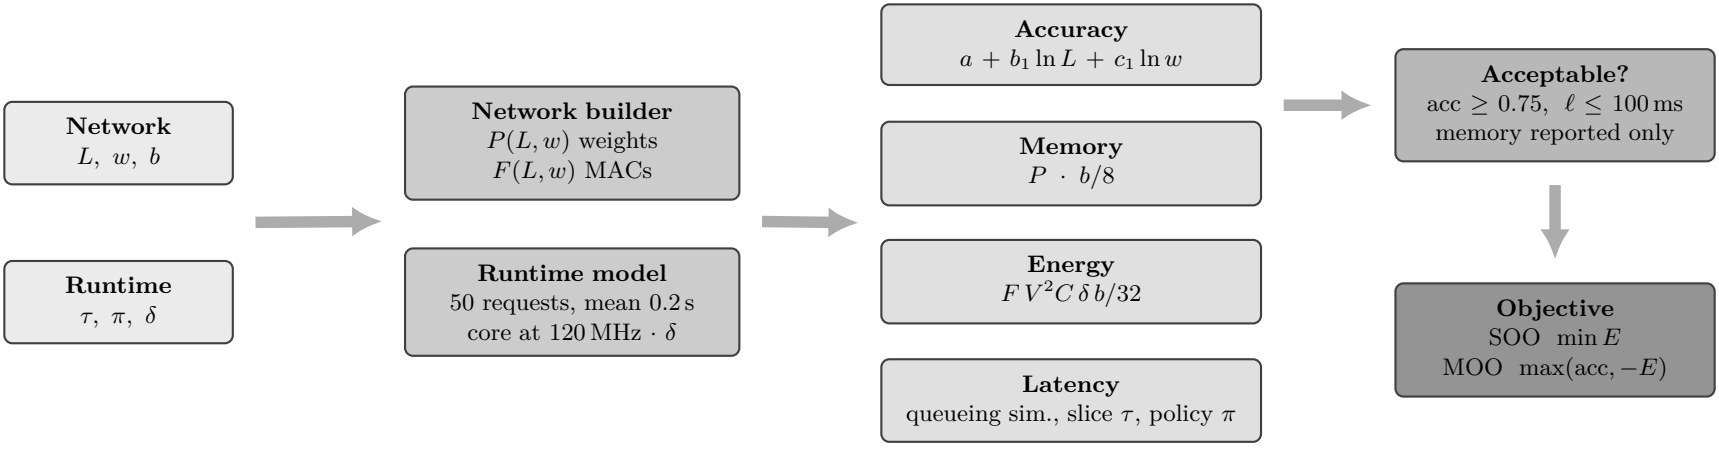
Network
$L,\ w,\ b$
Runtime
$\tau,\ \pi,\ \delta$
Network builder
$P(L, w)$ weights
$F(L, w)$ MACs
Runtime model
50 requests, mean 0.2 s
core at 120 MHz · $\delta$
Accuracy
$a + b_1 \ln L + c_1 \ln w$
Memory
$P \cdot b/8$
Energy
$F\,V^2 C\,\delta\,b/32$
Latency
queueing sim., slice $\tau$, policy $\pi$
Acceptable?
acc $\geq 0.75$, $\ell \leq 100$ ms
memory reported only
Objective
SOO $\min E$
MOO $\max(\text{acc}, -E)$
design vector
derived workload
evaluation models
decision