

## 9mm Rotary Type, Snap-In, Insulated Shaft

### **Application**

✓ TV/Video, Audio, Home appliance, Industrial control

#### **Feature**

✓ Smooth rotation feeling



### **■**Specification

Total Rotational Angle	RV09A series: 280±5°, RV09B series: 300±5°
Maximum Operating Voltage	50V AC
Insulation Resistance	100MΩ at DC250V
Dielectric Strength	AC250V for 1 minute
Rotational Torque	10-100 gf.cm
Click Torque	20-120 gf.cm
Rotational Stop Strength of the Shaft	3 kgs.cm min
Push/Pull Strength of the Shaft	5kgs for 3 sec
Operating Temperature Range	-10 °C~70°C
Rotation Life	With click: 5,000 cycles, without click: 10,000 cycles

### **■**How to order

<u>RV09AF-20</u> – <u>15F</u> - <u>B10K</u> - <u>0C</u>

Model

Shaft Type

Taper and	Resistance	Value
-----------	------------	-------

Order Code	Taper	Resistance Value
A100K	Log/A	100ΚΩ
B1M	Linear/B	1ΜΩ
C500K	Rev-log/C	500ΚΩ

Taper: A, B and C

Resistance Value:  $1\text{K}\Omega$  to  $500\text{K}\Omega$  and  $1\text{M}\Omega$ 

\*Contact us for other requirements.

Click	
Order Code	Description
Blank	No click
0C	With center click

Contact: <a href="mailto:sales@taiwanalpha.com">sales@taiwanalpha.com</a>



## 9mm Rotary Type, Snap-In, Insulated Shaft

## **■**Model Description


Model	Number of Unit	Terminal Type	With Sleeve or Bushing	Rotational Angle	Mounting Height
RV09ACF-20	Single unit	Horizontal	Sleeve	280°±5°	10 mm
RV09BCF-20	Single unit	Horizontal	Sleeve	300°±5°	10 mm
RV09ACF-40	Single unit	Vertical	Sleeve	280°±5°	7.0 mm
RV09BCF-40	Single unit	Vertical	Sleeve	300°±5°	7.0 mm
RV09AF-20	Single unit	Horizontal	N/A	280°±5°	10 mm
RV09AF-21	Single unit	Horizontal	N/A	280°±5°	6.5 mm
RV09BF-20	Single unit	Horizontal	N/A	300°±5°	10 mm
RV09BF-21	Single unit	Horizontal	N/A	300°±5°	6.5 mm
RV09AF-40	Single unit	Vertical	N/A	280°±5°	7.0 mm
RV09BF-40	Single unit	Vertical	N/A	300°±5°	7.0 mm
RV09AF-20E1N	Single unit	Horizontal	Plastic bushing	280°±5°	10 mm
RV09BF-20E1N	Single unit	Horizontal	Plastic bushing	300°±5°	10 mm
RV09AF-40E1N	Single unit	Vertical	Plastic bushing	280°±5°	7.0 mm
RV09BF-40E1N	Single unit	Vertical	Plastic bushing	300°±5°	7.0 mm
RV09AF-20E1	Single unit	Horizontal	Metal bushing	280°±5°	10 mm
RV09BF-20E1	Single unit	Horizontal	Metal bushing	300°±5°	10 mm
RV09AF-40E1	Single unit	Vertical	Metal bushing	280°±5°	7.0 mm
RV09BF-40E1	Single unit	Vertical	Metal bushing	300°±5°	7.0 mm

Back to top

Contact: <a href="mailto:sales@taiwanalpha.com">sales@taiwanalpha.com</a>




## 9mm Rotary Type, Snap-In, Insulated Shaft

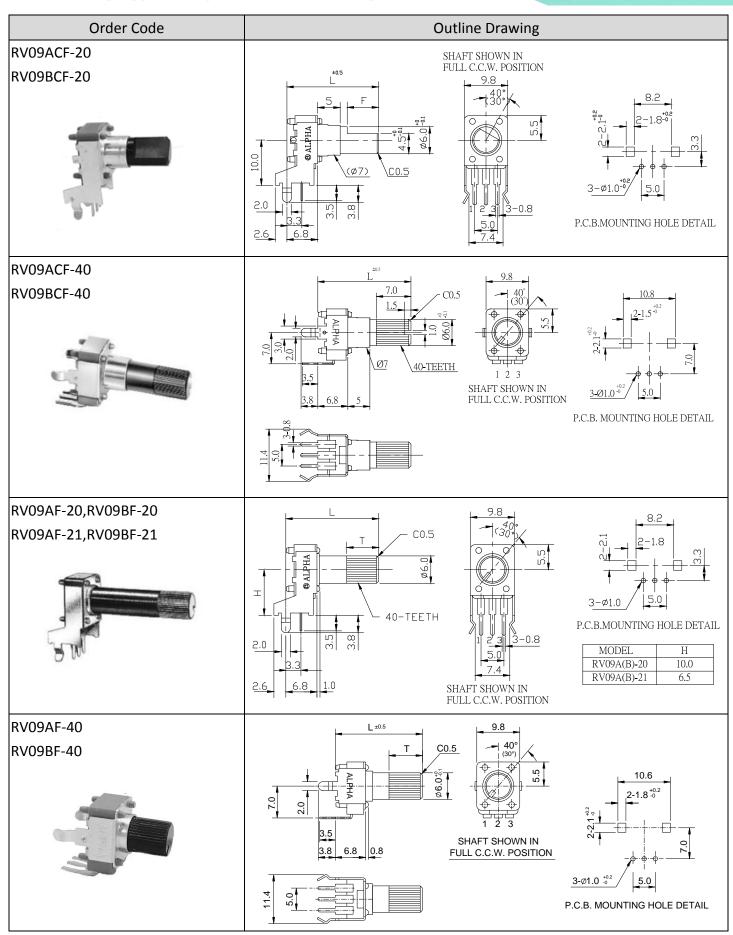

Back to top



## 9mm Rotary Type, Snap-In, Insulated Shaft

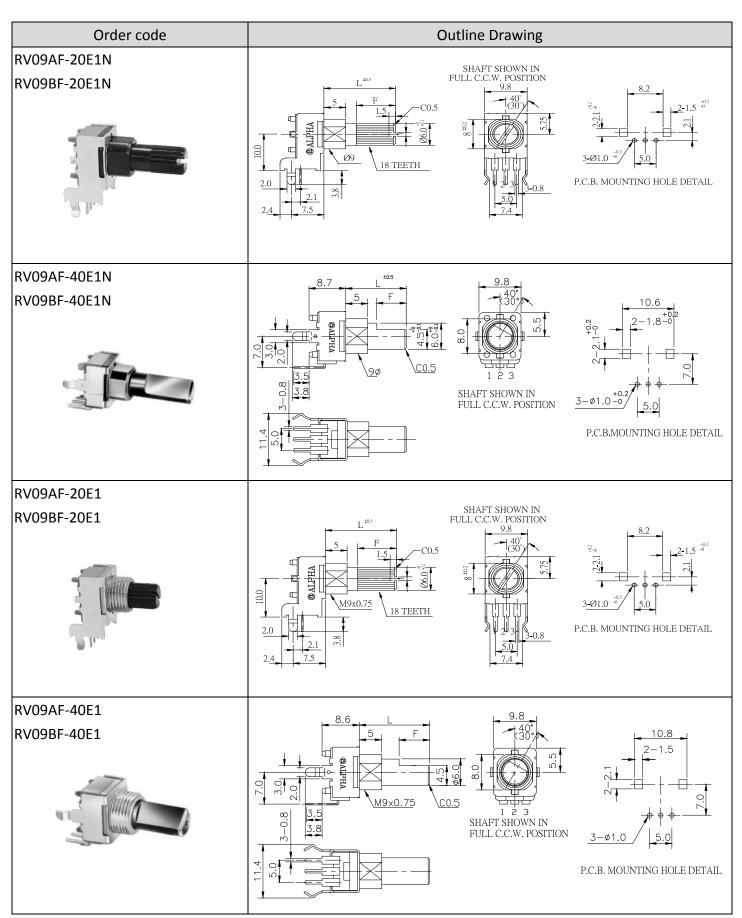


Back to top



## 9mm Rotary Type, Snap-In, Insulated Shaft

### **■ K TYPE**

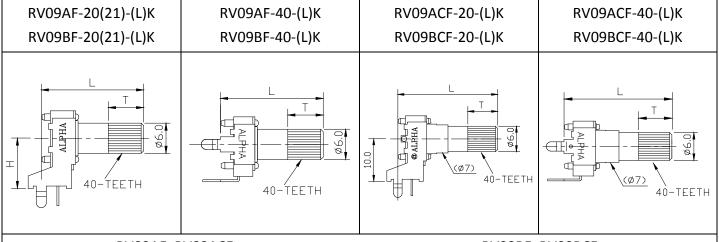

### RV09AF, RV09ACF

Order Code	15K	20K	25K	30K
L	15	20	25	30
Т	7	7	7	7


### RV09BF, RV09BCF


Order Code	20K	25K	30K
Ĺ	20	25	30
Т	7	7	7

\*\*15 mm shaft is not available for RV09ACF/BCF models.

RV09AF-20E1N-(L)K	
RV09BF-20E1N-(L)K	
RV09AF-20E1-(L)K	
RV09BF-20E1-(L)K	

RV09AF-40E1N-(L)K RV09BF-40E1N-(L)K RV09AF-40E1-(L)K RV09BF-40E1-(L)K

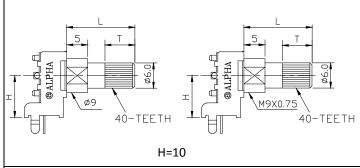

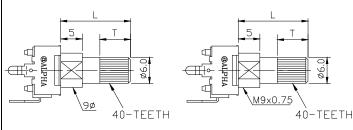


Order Code	165K	25K
L	16.5	21.5
Т	7	7

Back to top



## 9mm Rotary Type, Snap-In, Insulated Shaft

### **■ F TYPE**

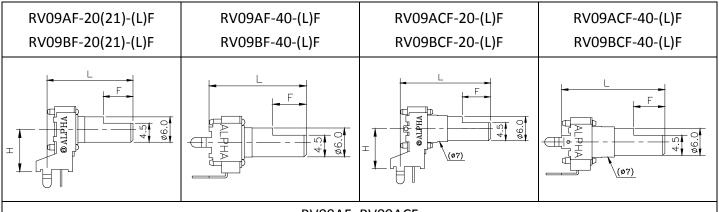

### RV09AF, RV09ACF


Order Code	*15F	20F	21F	2.	5F	26F	30F	31F	375F
L	15	20	21	2	25		30	31	37.5
F	6	7	7	7	12	12	12	12	12


#### RV09BF, RV09BCF


Order Code	*15F	20F	21F	235F	25F			26F	30F	31F	335F	35F	375F
L	15	20	21	23.5		25		26	30	31	33.5	35	37.5
F	6	7	7	7	7	8.25	12	12	12	12	12	12	12


### \*\*15 mm shaft is not available for RV09ACF/BCF models.

RV09AF-20E1N-(L)F RV09BF-20E1N-(L)F RV09AF-20E1-(L)F RV09BF-20E1-(L)F RV09AF-40E1N-(L)F RV09BF-40E1N-(L)F RV09AF-40E1-(L)F RV09BF-40E1-(L)F









#### RV09AF

Order Code	115F	125F	5F 165F		175F	215F	225F	29F
L	11.5	12.5	16.5		17.5	21.5	22.5	29
F	6.5	7	7	12	12	12	12	12

#### RV09BF


Order Code	115F	125F	15F	165F	165F	165F	175F	215F	225F	25F	265F	29F
L	11.5	12.5	15	16.5	16.5	16.5	17.5	21.5	22.5	25	26.5	29
F	6.5	7	7	7	8.25	12	12	12	12	12	12	12



18-TEETH

## 9mm Rotary Type, Snap-In, Insulated Shaft

#### **■** B TYPE

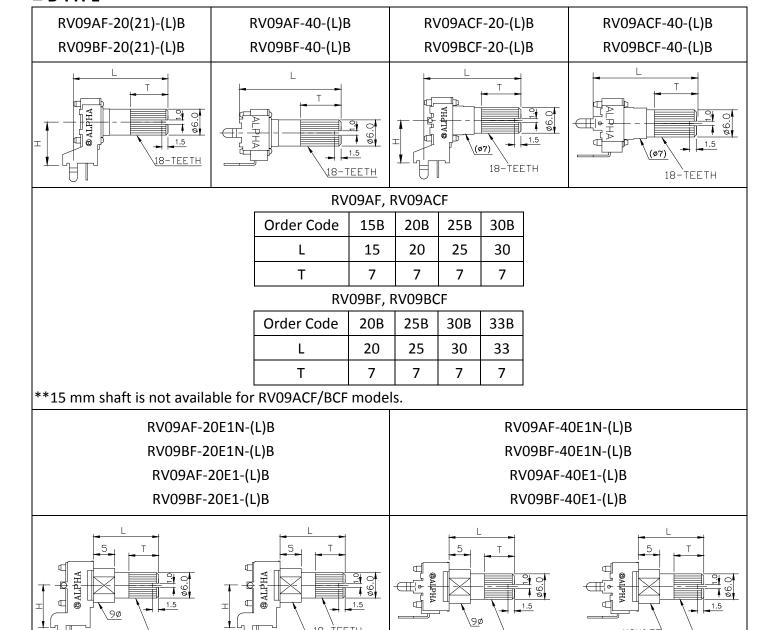

RV09AF

Order Code	115B	165B	215B
L	11.5	16.5	21.5
Т	7	7	7

H=10

#### RV09BF

Order	115B	165B	215B	25B	
Code	1130	1036	2136	236	
L	11.5	16.5	21.5	25	
Т	7	7	7	7	

18-TEETH

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

Back to top

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### Alpha (Taiwan):

RV09AF-40-20K-B10K RV09AF-40-20K-B10K RV09AF-40-20K-A55 RV09AF-20-20K-A55 RV09AF-20-20K-B55
RV09AF-40-20K-B55 RV09AF-40-20K-B50K RV09AF-40-20K-A54 RV09AF-20-20K-B16 RV09AF-20-20K-B13
RV09AF-20-20K-B53 RV09AF-20-20K-B23 RV09AF-40-20K-A53 RV09AF-40-20K-A16 RV09AF-40-20K-A13
RV09AF-40-20K-A23 RV09AF-40-20K-B100K RV09AF-20-20K-B100K RV09AF-20-20K-B10K RV09AF-40-20K-B10K RV09AF-40-30K-B10K RV09AF-40-20K-B10K RV09A