


Four-layer receiver FPC

Exploded assembly

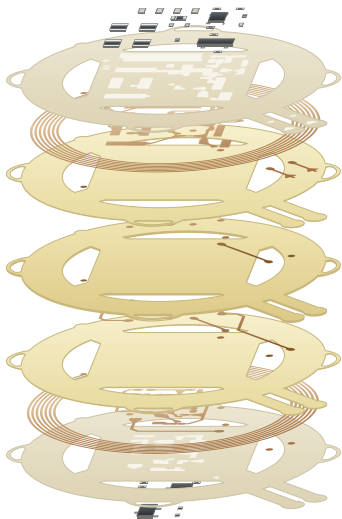

- Top components · 21
- Coverlay · 12.5+15 um
- L1 · Top copper
- PI film · 25 um
- L2 · Ground
- PI core · 50 um
- L3 · Power
- PI film · 25 um
- L4 · Bottom copper
- Coverlay · 12.5+15 um
- Bottom components · 11

4 copper / 3 PI / 2 coverlay / 32 components / 8 cut-outs

Layer spacing and package heights are schematic.

PI thicknesses nominal.

Coverlay windows derived from pads (+0.1 mm).

Full coverlay openings: see the detail sheet.