


Four-layer receiver FPC

Exploded assembly - horizontal arrangement

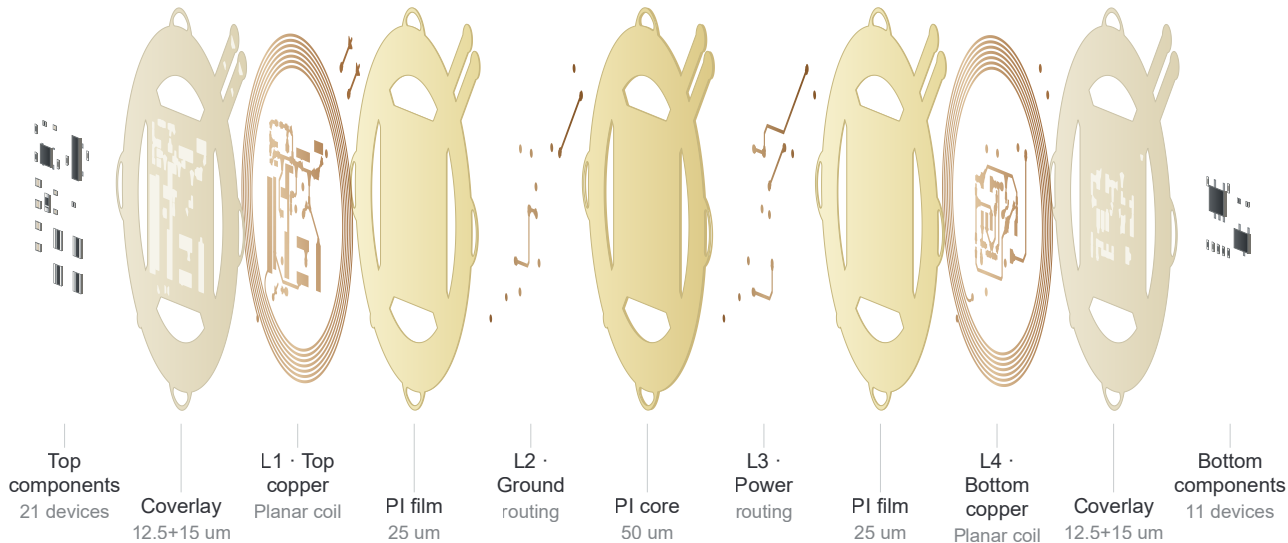

4 copper / 3 internal PI / 2 coverlay / 32 components (21 top, 11 bottom) / 8 board cut-outs

Layers run left to right, top side first. Layer spacing and package heights are schematic.

PI thicknesses nominal; coverlay windows derived from copper pads (+0.1 mm).