


Four-layer receiver FPC

Exploded assembly

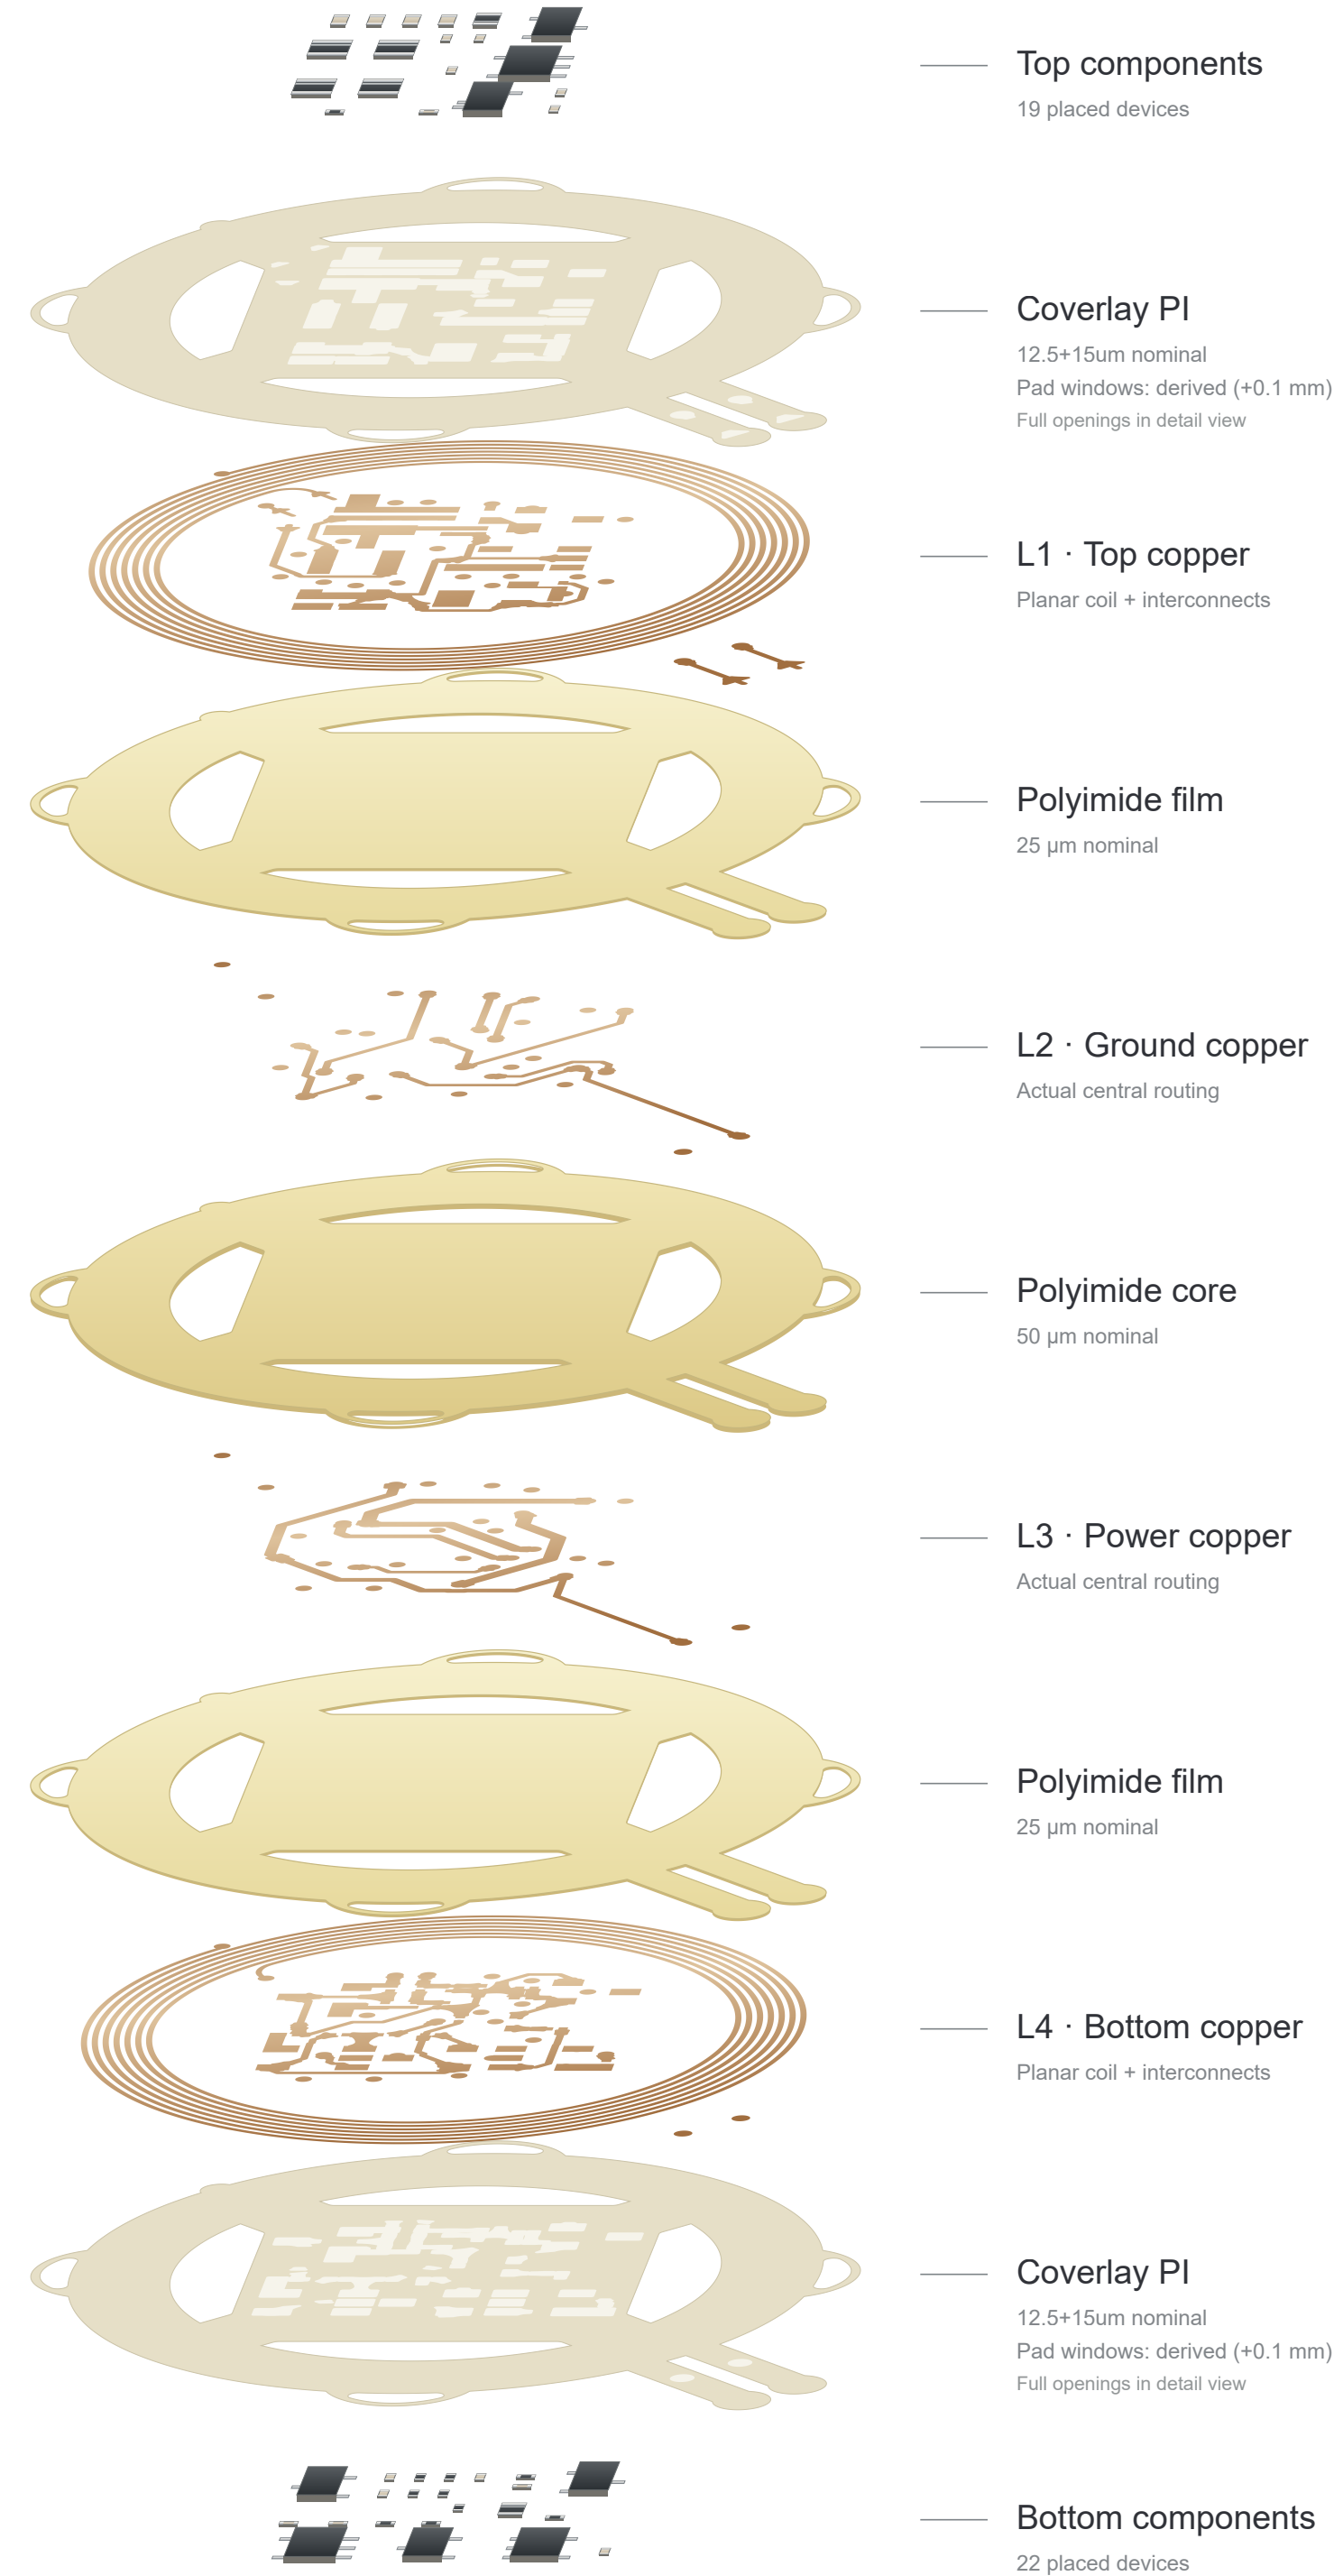

4 copper / 3 internal PI / 2 coverlay / 41 components / 8 board cut-outs

Layer separation and package heights are schematic. PI thicknesses follow the existing design brief.

Coverlay windows: derived (+0.1 mm); contrast softened here. Complete openings in detail view.