


Vehicle Reader

Product Specifications



System Specifications

- Requires ButterflyMX cloud-based access controller
- Up to 10 ft reading distance with windshield tag
- UHF Frequency: 902–928 MHz: 915 MHz
- Visual light confirmation and audible beep
- Secure end-to-end bidirectional communication
- Accommodates indoor and outdoor installation environments
- IP66 weather-resistant with waterproof electronics
- IK10 reinforced vandal-proof structure
- Operating temperatures: -13°F to +140°F (- 25°C to +60°C)
- Humidity range: 5%–95%

Power Requirements

- Powered by ButterflyMX cloud-based access controller
- DC voltage: 9–36 VDC
- DC current: 900mA

Certifications

- CE
- FCC
- UL

Dimensions


- Size: 7.2" H X 9.1" W X 1.4" D
- Weight: 93.5 oz (2.65 kg)
- Compliant with VESA 75 × 75 universal mounting kits (optional)

Vehicle Reader


Product Cutsheet

 Images are not to scale.

Front and Side Elevation

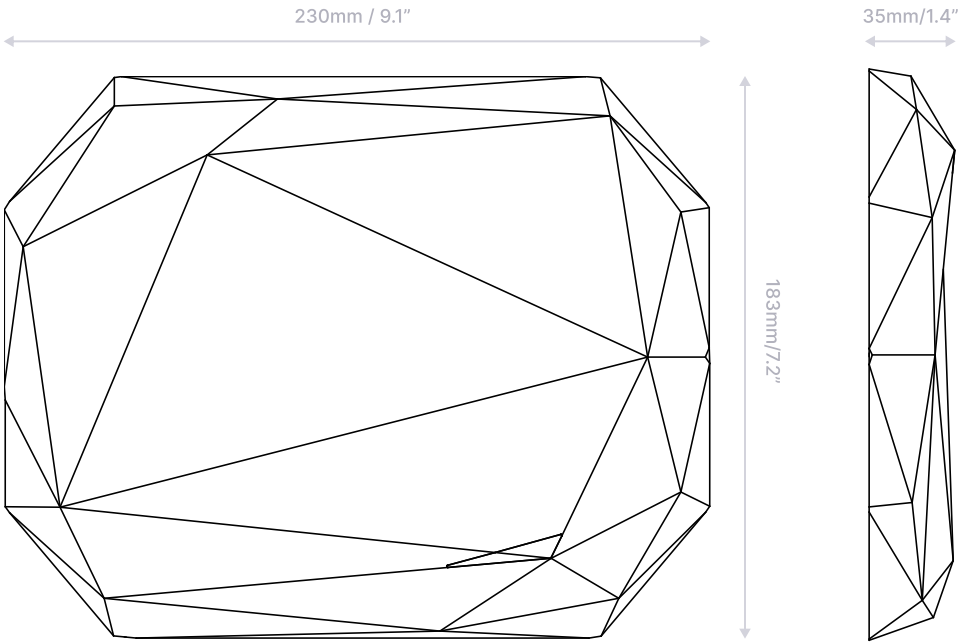

Back Elevation

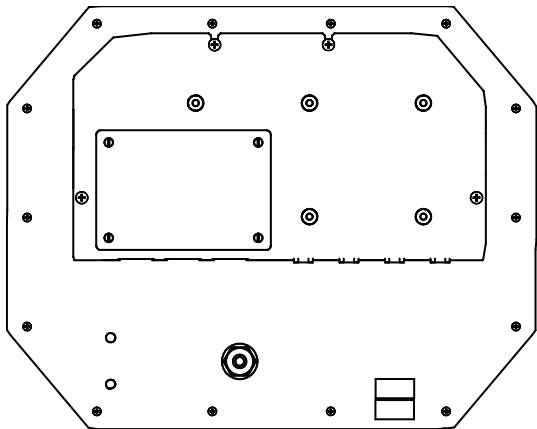

Wall Mounting Plate Front Elevation

Version: **v1 (updated 12/20/23)**

Software: **v2.1**

©2023 ButterflyMX, Inc.

(800) 398-4416 ext. 2

support@butterflymx.com

butterflymx.com