



To check if a firmware update is necessary for your Yealink phone, we first must determine what firmware is currently installed. We can do this by pressing the OK button amidst the directional buttons.

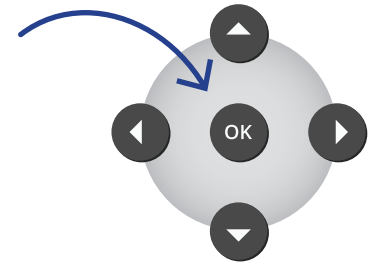

Status			
1. IPv4 IP :	192.168.178.77		
2. Mac adres :	80:5E:CB:9F:C		
3. Firmware :	53.80.188.5		
Terug			

The numbers next to Firmware show the version. When the second number is 80 or lower, an update is necessary.

Before we can start the update, the phone needs to sign off. In **ContactSuite** go to **VoIP accounts** and deactivate the VoIP account configured to the Yealink phone you wish to update. The phone will now reboot and this may take a while.

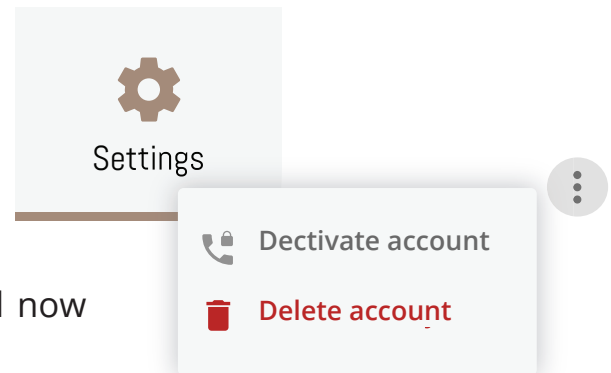

Status			
1. IPv4 IP :	192.168.178.77		
2. Mac adres :	80:5E:CB:9F:C		
3. Firmware :	53.80.188.5		
Terug			

Once the phone has finished rebooting, press the OK button again to open the status menu. The IP shown in the menu is the local IP of the phone. Enter this IP in your web browser of a PC that is connected to the same local network as the phone.

This will open Yealink's management portal. You need to login, you can do this with (if unchanged) username **admin** and password **12345** otherwise use the password that you configured yourself.

**Login**
Enterprise IP Phone SIP-T19P\_E2


Username

Password

Now open a new tab in your web browser ( CTRL + T ) and go to the URL at the bottom of this page that corresponds with your phone type, this will start a download. It's possible for your browser to ask what you'd like to do with the file. Choose Save and take note of where it's saved. Usually this is your default Downloads folder.



Continue after the download has finished.

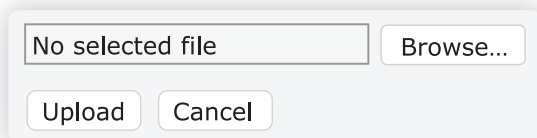

Go back to the tab in which you're logged in to the Yealink management portal. Navigate to **Settings** in the menu and then use the left hand menu to go to **Upgrade**. There you will find an Upload field, press Browse... and select the .rom file you just downloaded. Press Upload.

The phone will now restart several times and can take up several minutes to complete. When this has finished, log in again to the Yealink management portal. Navigate to the **Upgrade** page again but this time click **Reset To Factory**. The phone will now acquire the correct information from and sign in to **ContactSuite**.

## Firmware Download

-  T19P [https://acs.contactsuite.nl/T19P\\_E2-53.83.188.5.rom](https://acs.contactsuite.nl/T19P_E2-53.83.188.5.rom)
-  T41P <https://acs.contactsuite.nl/T41P-36.83.188.6.rom>
-  T41S [https://acs.contactsuite.nl/T46S\\_T48S\\_T42S\\_T41S-66.83.188.6.rom](https://acs.contactsuite.nl/T46S_T48S_T42S_T41S-66.83.188.6.rom)
-  T42G <https://acs.contactsuite.nl/T42G-29.83.188.6.rom>
-  T46G <https://acs.contactsuite.nl/T46G-28.83.188.6.rom>