

Control of Linear Vibrations
Automation and Control Laboratory
Politecnico di Milano

Alessio Russo, Gianluca Savaia, Alberto Ficicchia

Academic Year 2015/2016



Contents

1	Team introduction	2
2	Experience introduction	3
3	Models	4
3.1	Model1 - no BEMF, no disk inertia, no friction cart, no friction motor, no backlash	4
3.2	Model2 - no friction cart, no friction motor, no backlash	5
3.3	Model 3 - no friction motor, backlash	5
3.4	Model 4	5
3.5	2 DOF - Model	6
4	System Identification	7
4.0.1	Validation cost function	7
4.1	Open vs Closed loop identification	8
4.2	White box identification	11
4.2.1	Detached system: cart and springs identification	11
4.2.2	Motor identification	15
4.2.3	Overall system identification	17
4.3	Gray box identification	18
4.4	Non-linearities identification	19
5	Control of 1 Degree of Freedom	20
6	Control of 2 Degree of Freedom	21
7	Control of 3 Degree of Freedom	22
8	Conclusions	23
9	Appendix	24

Chapter 1

Team introduction

The team is composed by 3 people, all holding a B.Sci. in Engineering not obtained at Politecnico di Milano.

1. *Alessio Russo*: holds a B.Sci. degree in Computer Engineering, enrolled at the M.Sci. degree Automation and Control Engineering at Politecnico di Milano. Because of his high interest in mathematics he prefers to deal with problems using precise models. Currently he's also an ASP student, and his thesis will focus on the implementation of adaptive and robust controllers for the control of unmodelled dynamics of quadrotors, with the use of neural networks and L1 adaptive control techniques.
2. *Gianluca Savaia*:
3. *Alberto Ficicchia*:

Chapter 2

Experience introduction

Chapter 3

Models

Equations of motion:

$$\begin{aligned} J\ddot{\theta} &= c(t) - c_l(t) - f_m(\dot{\theta}) \\ M\ddot{x} + C\dot{x} + Kx &= F(t) - f_c(\dot{x}) \\ \frac{D}{2}\theta &= x \end{aligned}$$

f_m describes the viscous friction of the motor, f_c describes the friction of the cart. The gearbox is assumed ideal.

Therefore $F(t)$ is the transmitted linear force from the motor, thus:

$$F(t)\frac{D}{2} = c_l(t) \Rightarrow F(t) = \frac{2}{D}\left(c(t) - J\ddot{\theta} - f_m(\dot{\theta})\right)$$

In the end we obtain:

$$\left(M + \frac{4}{D^2}J\right)\ddot{x} + C\dot{x} + Kx = \frac{2}{D}c(t) - \frac{2}{D}f_m(\dot{\theta}) - f_c(\dot{x})$$

In case the gearbox is not assumed ideal, we have:

$$J\ddot{\theta} = \begin{cases} c(t) - c_l(t) - f_m(\dot{\theta}) & \text{in contact} \\ c(t) - f_m(\dot{\theta}) & \text{not in contact} \end{cases}$$

And

$$F(t) = \begin{cases} \frac{2}{D}c_l(t) & \text{in contact} \\ 0 & \text{otherwise} \end{cases}$$

3.1 Model1 - no BEMF, no disk inertia, no friction cart, no friction motor, no backlash

$$\begin{aligned} M\ddot{x} + C\dot{x} + Kx &= 2\frac{c(t)}{D}, \quad \theta = \frac{2}{D}x \\ \mathcal{L}\{c(t)\} &= 2K_e \frac{1}{2R + 2sL} \mathcal{L}\{v(t)\} \end{aligned}$$

3.2 Model2 - no friction cart, no friction motor, no backlash

$$M\ddot{x} + C\dot{x} + Kx = 2\frac{c(t)}{D} - 4\frac{J}{D^2}\ddot{x}, \quad \theta = \frac{2}{D}x$$

$$\mathcal{L}\{c(t)\} = 2K_e \frac{1}{2R + 2sL} (\mathcal{L}\{v(t)\} - 2K_e s \mathcal{L}\{\theta\})$$

3.3 Model 3 - no friction motor, backlash

$$M\ddot{x} + C\dot{x} + Kx = 2\frac{c(t)}{D} - 4\frac{J}{D^2}\ddot{x} - f_c(\dot{x}), \quad \theta = \frac{2}{D}x$$

$$\mathcal{L}\{c(t)\} = 2K_e \frac{1}{2R + 2sL} (\mathcal{L}\{v(t)\} - 2K_e s \mathcal{L}\{\theta\})$$

3.4 Model 4

$$M\ddot{x} + C\dot{x} + Kx = F(t) - 4\frac{J}{D^2}\ddot{x} - f_c(\dot{x})$$

$$\mathcal{L}\{c(t)\} = 2K_e \frac{1}{2R + 2sL} (\mathcal{L}\{v(t)\} - 2K_e s \mathcal{L}\{\theta\})$$

See introduction for gearbox modelling.

1. $\mathcal{L}\{\cdot\}$ Laplace transform.
2. J Disk inertia.
3. M Cart+load mass
4. C Spring damping.
5. K Spring stiffness.
6. $c(t)$ Torque.
7. D Disk diameter.
8. $f_c(t)$ friction applied to the cart.
9. $f_g(t)$ sliding friction applied to the teeth between the gearbox and the disk.
10. f_m friction of the motor
11. θ angle of the disk.
12. $v(t)$ tension applied to the motor.
13. R, L resistance and inductance of the motor
14. K_e backemf constant.

3.5 2 DOF - Model

To derive the equations of motion we can use the Lagrangian approach. Let T, V, D be the kinetic, potential and dissipated energy. Then:

$$\begin{aligned} T &= \frac{1}{2} \left(M_1 + \frac{4}{D^2} J \right) \dot{x}_1^2 + \frac{1}{2} M_2 \dot{x}_2^2 \\ V &= \frac{1}{2} k_1 x_1^2 + \frac{1}{2} k_2 (x_2 - x_1)^2 \\ D &= \frac{1}{2} c_1 \dot{x}_1^2 + \frac{1}{2} c_2 (\dot{x}_2 - \dot{x}_1)^2 \end{aligned}$$

Let Q be the external forces acting on the systems:

$$\begin{aligned} Q_1 &= \frac{2}{D} c(t) - \frac{2}{D} f_m(\dot{\theta}) - f_c(\dot{x}_1) \\ Q_2 &= -f_c(\dot{x}_2) \end{aligned}$$

The equations of motion are given by:

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{x}_i} \right) - \frac{\partial T}{\partial x_i} + \frac{\partial V}{\partial x_i} + \frac{\partial D}{\partial \dot{x}_i} = Q_i$$

$$\begin{aligned} \left(M_1 + \frac{4}{D^2} J \right) \ddot{x}_1 + (c_1 + c_2) \dot{x}_1 + (k_1 + k_2) x_1 &= k_2 x_2 + c_2 \dot{x}_2 + \frac{2}{D} (c(t) - f_m(\dot{\theta})) - f_c(\dot{x}_1) \\ M_2 \ddot{x}_2 + c_2 \dot{x}_2 + k_2 x_2 &= k_1 x_1 + c_1 \dot{x}_1 - f_c(\dot{x}_2) \end{aligned}$$

Chapter 4

System Identification

The system considered can be easily modelled and identified without the need to use black-box identification to identify the system.

For completeness both *white-box* and *grey-box* identification are used.

First of all the problem of whether to consider a *closed* or *open* loop system is considered. In fact *back-emf* can be seen as a gain acting on the velocity of the cart, thus it's a gain on the closed loop.

Then, using both *white-box* and *grey-box* identification we identified the main parameters of the system:

1. Resistance and inductance for the motor.
2. Mass, stiffness and damping for the cart and the springs.

Last, identification of non-linearities are considered.

4.0.1 Validation cost function

An important aspect of the identification process is validation of results and this can be done in many ways.

We will mainly compare two signals, thus effectiveness in capturing the shape of a signal is essential for the type of validation function that we will use.

For this purpose we can make use of a distance function $d(x, y) : \mathbb{R}^n \times \mathbb{R}^n \rightarrow [0, 1]$ induced by a generic norm $n(x) : \mathbb{R}^n \rightarrow [0, \infty)$. In this case we can construct d in the following way:

$$d(x, y) = \frac{1}{1 + n(x - y)}$$

The problem, then, is to find a norm capable of capturing the essential information of a signal.

Usually the L_2 norm is used, since it's related to the signal energy, and from a statistical point of view it corresponds to the variance of the difference of two

signals. If normalised it's called *MSE-Mean Square Error*: an estimator of the overall deviations between prediction and measurements. Mathematically:

$$\text{MSE} = \frac{\mathbb{E}[(x - y)^2]}{n}$$

Where n is the dimension of x, y .

Why does it corresponds to the L_2 norm? First of all, notice that $\mathbb{E}[vw]$, where v, w are random variables, corresponds to a non-scaled projection of v on w . Any projection can be written in terms of a generic scalar product $\langle \cdot, \cdot \rangle$, because of the Projection Theorem, thus:

$$\mathbb{E}[(v - w)^2] = \langle v - w, v - w \rangle$$

The last term corresponds to the square of a norm $\|\cdot\|^2$, which can be proven to be the L_2 norm.

Therefore, *MSE* as defined before, is the square of a norm. Thus:

$$n(x - y) = \frac{\sqrt{\mathbb{E}[(x - y)^2]}}{n}$$

is a norm. And the validation cost function is:

$$d(x, y) = \frac{1}{1 + n(x - y)}$$

4.1 Open vs Closed loop identification

In this experiment we had the necessity to choose whether to consider back-emf in the identification process or to completely ignore it.

As a matter of fact, ignoring it would mean to neglect a feedback component. But how much can it affect identification of other parameters?

Consider for example the following 2-nd order system, such as the system considered in the experiment:

$$G(s) = \frac{1}{Ms^2 + cs + k}$$

First consider a feedback loop with a constant gain ρ on the feedback. Thus the closed loop transfer function is:

$$T(s) = \frac{G(s)}{1 + \rho G(s)} = \frac{1}{Ms^2 + cs + (k + \rho)}$$

The effect of ρ is to change the length of the poles, i.e. their absolute value, since for polynomial with real coefficients the zero-degree coefficient is the product of all roots.

Just compare with $s^2 + 2\xi\omega_0 s + \omega_0^2$, it's easy to see that $\omega_0^2 = \frac{k+\rho}{M}$.

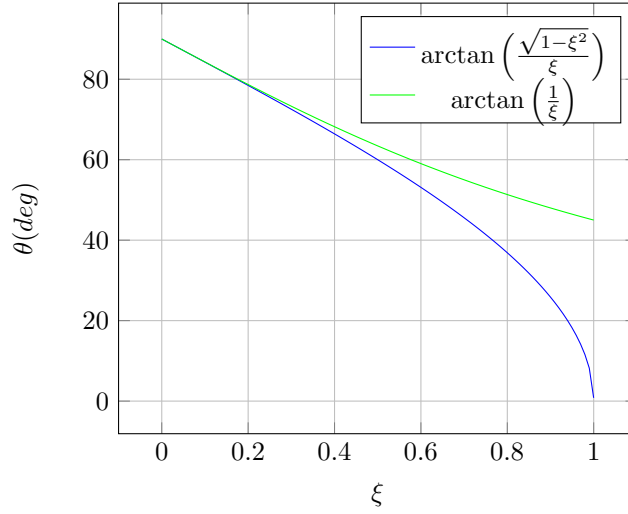


Figure 4.1: Comparison of the approximated value of θ with the real one

In our case back-emf acts on the velocity of the cart, so if we have a feedback loop on the position, on the feedback we have γs , and the closed loop transfer function is:

$$T(s) = \frac{1}{Ms^2 + cs + k + \gamma s}$$

So what is the effect of γs ? Again, if we compare with $s^2 + 2\xi\omega_0 s + \omega_0^2$ we have:

$$c + \gamma = 2\xi\omega_0$$

Where ξ has a strict relationship with the angle formed between the real negative axis and a pole, θ :

$$\theta = \arctan\left(\frac{\sqrt{1-\xi^2}}{\xi}\right)$$

So the effect of γs is to rotate the poles, but to which extent is this effect negligible?

From data we are mainly dealing with values of $\xi \in (0, 0.5)$, so we can approximate the value of θ :

$$\theta \approx \arctan\left(\frac{1 - \frac{\xi^2}{2}}{\xi}\right) = \arctan\left(\frac{1}{\xi} - \frac{\xi}{2}\right) \approx \arctan\left(\frac{1}{\xi}\right)$$

Notice that in the last step we made use of the fact that $\frac{1}{\xi} \gg \frac{\xi}{2}$. Check figure 4.1 to compare the approximation.

Then, how much does θ change for a small variation of ξ ?

$$\frac{d\theta}{d\xi} = -\frac{1}{1 + \xi^2} = -1 + \frac{\xi^2}{1 + \xi^2}$$

For $\xi < 0.5$ the change is almost linear, as seen from figure 4.1. Moreover $\frac{d\theta}{d\xi} \approx -1$ for $0 < \xi < 0.5$, so the slope of the curve is almost -1 .

In our case $\xi = \frac{c+\gamma}{2\omega_0} = \frac{c}{2\omega_0} + \frac{\gamma}{2\omega_0}$, so the contribution of the backemf is $\frac{\gamma}{2\omega_0}$.

From the motor datasheet $\gamma \ll 1$ and from experiments ω_0 is always greater than $10 \frac{rad}{sec}$, therefore the contribution is small, less than 1 and since the contribution to θ is linear with proportion ~ -1 also the change in θ is less than 1 degree, therefore backemf can be ignored and open-loop identification can be applied.

4.2 White box identification

4.2.1 Detached system: cart and springs identification

To accurately identify the mass of the cart and the stiffness/damping of the spring, the motor was detached from the cart, in order to reduce influence of friction due to the pinion and rack.

So we obtain a system like the one considered in figure 4.2.

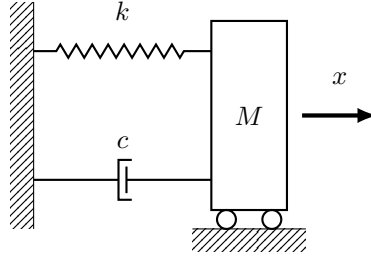


Figure 4.2: Cart detached from the motor diagram.

The differential equation governing this system is given by:

$$M\ddot{x} + c_i\dot{x} + k_ix = f(t)$$

where M [kg] is the total mass of the system, c_i [Ns m⁻¹] comprehends the damping of the i -eth spring and the viscous damping of the sliding guide. Finally k_i [N m⁻¹] is the stiffness of the i -eth spring, and $f(t)$ represents external forces acting on the system (such as non-linear friction components).

Experiment description

For each spring we conducted 2 experiments, one without any load and one with a load of 0.986 [kg], each repeated 3 times. To accurately identify the mass of the cart and the stiffness/damping of the spring, the motor was detached from the cart, in order to reduce influence of friction due to the pinion and rack.

For each experiment the cart was released from an initial condition $x(0) = x_0 \neq 0$ and 0 velocity, such that the force that the spring was exerting on the cart was sufficient enough to make negligible the very small component of the static friction acting on the cart.

Notice that the initial condition differs for each spring since the stiffness is very different for each spring.

If we neglect the external forces acting on the cart, which are negligible since they are small non-linear components, then the system considered is:

$$\begin{cases} M\ddot{x} + c_i\dot{x} + k_ix = 0 \\ x(0) \in [1, 3]\text{cm} \\ \dot{x}(0) = 0 \end{cases} \quad (4.1)$$

Then data regarding the position of the cart is collected, and from that data the pulsation, damping ratio, mass and stiffness are retrieved.

Experiment analysis

Using 4.1 the response in time can be obtained by using the Laplace transform. Let $X(s)$ be the Laplace transform of $x(t)$, then:

$$mX(s)(s^2 - x(0)s) + cX(s)(s - x(0)) + kX(s) = 0$$

and:

$$X(s) = x(0) \frac{(ms + c)}{ms^2 + cs + k}$$

If we solve in $X(s)$ and then apply the inverse Laplace transform, we obtain the response in time:

$$x(t) = e^{-\xi\omega_0 t} (A \cos(\omega t) + B \sin(\omega t))$$

where $\xi = \frac{c}{2\sqrt{Mk}}$, $\omega_0 = \sqrt{\frac{k}{M}}$, $\omega = \omega_0 \sqrt{1 - \xi^2}$, and A, B depend on $x(0), \xi$.

Since the pulsation is the same for both sinusoidal components we have:

$$x(t) = Ce^{-\xi\omega_0 t} \sin(\omega t + \phi)$$

Where $C = \sqrt{A^2 + B^2}$, $\phi = \arctan(A/B)$.

Knowing those equations we are able to extract data from the response in the following way:

- To measure ω we can just extract the period T : the difference in time between the first and second peak is taken, and that difference is the period. Then ω is just $\frac{2\pi}{T}$. We consider only the first and second peak because at the beginning non-linearities such as static and coulomb friction are negligible.
- To measure ξ also the first and second peak are considered. Let t_0, t_1 be the times at which there is the first and second peak. Notice that $t_0 = 0, t_1 = T$, and $x(T) = Ae^{-\xi\omega_0 T}$. Then, consider:

$$\log\left(\frac{x(0)}{x(T)}\right) = \log(e^{\xi\omega_0 T}) = \xi\omega_0 T = \frac{\xi}{\sqrt{1 - \xi^2}} 2\pi$$

Then

$$\xi = \frac{a}{\sqrt{a^2 + 1}}, \quad a = \frac{1}{2\pi} \log\left(\frac{x(0)}{x(T)}\right)$$

Once M, k are known we can calculate the damping from $c = 2\xi\sqrt{Mk}$. Observe that for $a \sim 0 \Rightarrow \xi \sim a$.

Since damping

- To identify each spring and the mass of the cart we made use of the fact that we have two type of experiments for each spring: one without any load, and one with a load of 0.986 kg. We obtain a system of linear equations:

$$\begin{cases} \frac{k_i}{m_c + m_l} = \omega_l^2 \\ \frac{k_i}{m_c} = \omega_{nl}^2 \end{cases}$$

Where m_c is the mass of the cart, m_l the mass of the load, ω_l the pulsation of the system with the load, ω_{nl} the pulsation of the system without the load. It's a system with two unknowns (k_i, m_c) and two equations, so we can solve it. We can rewrite it in matrix form:

$$\begin{bmatrix} 1 & -\omega_l^2 \\ 1 & -\omega_{nl}^2 \end{bmatrix} \begin{bmatrix} k_i \\ m_c \end{bmatrix} = \begin{bmatrix} \omega_l^2 m_l \\ 0 \end{bmatrix}$$

and solve for (k_i, m_c) .

Experiment results

Since there are 3 springs let's denote the set of springs as $K = \{k_l, k_m, k_h\}$ where l stands for low, m for medium and h for high. In a similar manner we define the various pulsation: for example ω_{m-nl} is the pulsation for the system with spring k_m and no load.

Pulsation In the table below are shown the various mean of the pulsation and their relative standard deviation:

$(\omega_{avg} [\text{rad s}^{-1}], \omega_{std} [\text{rad s}^{-1}])$	k_h	k_m	k_l
with load	(21.2989, 0)	(14.2800 , 0.0671)	(10.6495 , 0)
with no load	(34.9066 , 0)	(23.7101, 0.1792)	(17.6991, 0.1005)

Table 4.1: Pulsation of the cart detached from the motor. Various configuration are shown (with a load of 0.986 [kg] and no load) for the various springs.

It's interesting to note that even if we considered to average all the periods by considering the various peaks of the signal, and not only the first two peaks, we would have obtained the same results. This is an hint of the fact that the principal non-linearity, i.e. coloumb friction, is negligible.

Cart mass and springs stiffness By using the mean pulsation the resultant average mass of the cart m_c is 0.5685 [kg] with standard deviation 0.0141 [kg]. Results also for the springs are shown in table 4.2.1.

$(k_h [\text{N m}^{-1}], m_c [\text{kg}])$	$(k_m [\text{N m}^{-1}], m_c [\text{kg}])$	$(k_l [\text{N m}^{-1}], m_c [\text{kg}])$
(712.5990 , 0.5848)	(315.5074 , 0.5612)	(175.2819, 0.5595)

Table 4.2: Identified springs and cart mass

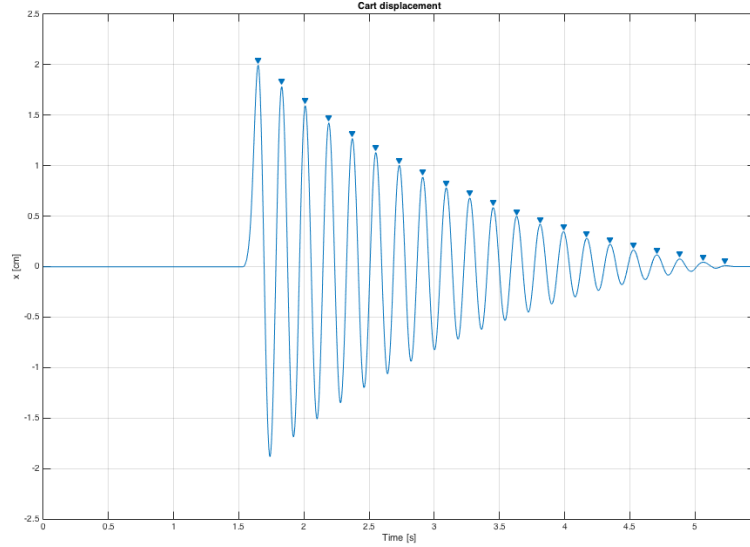


Figure 4.3: Displacement of the cart with spring k_h and load 0.986 [kg].

Damping and damping ratio The mean values for the damping ratio, including their standard deviation, are shown in table 4.2.1 for the various springs, with and without a load.

(ξ_{avg}, ξ_{std})	k_h	k_m	k_l
with load	(0.0128, 0.0007)	(0.0238, 0.0018)	(0.0346, 0.0036)
with no load	(0.0179, 0.0025)	(0.0301, 0.0013)	(0.0379, 0.0040)

Table 4.3: Damping ratio. Various configuration are shown (with a load of 0.986 [kg] and no load) for the various springs.

From the values shown in table 4.2.1 it seems that the damping C is function of the mass, in fact we don't obtain the same damping if we consider the damping ratio with no load or with load. For example consider k_h : with a load we obtain $C = 0.0128 \cdot 2 \cdot \sqrt{k_h M} = 0.8520$ [N s m⁻¹], without load: $C = 0.0179 \cdot 2 \cdot \sqrt{k_h m_c} = 0.7206$ [N s m⁻¹]. This is most likely an effect due to friction, and the various damping values are shown in table 4.2.1.

C [N s m ⁻¹]	k_h	k_m	k_l
with load	0.8520	1.0542	1.1423
with no load	0.7206	0.8063	0.7567

Table 4.4: Damping values. Various configuration are shown (with a load of 0.986 [kg] and no load) for the various springs.

We can therefore linearly characterize the damping value as function of the

mass centered in m_c , for each spring:

$$C(m) = C_{nl} + \frac{C_l - C_{nl}}{m_l}(m - m_c) = C_{nl} + \alpha(m - m_c)$$

The different values of α , the difference quotient, are shown in table 4.2.1

	k_h	k_m	k_l
$\frac{C_l - C_{nl}}{m_l} [\text{N s m}^{-1} \text{ kg}^{-1}]$	0.1334	0.2514	0.3911

Table 4.5: Damping difference quotient. Due to friction damping changes for different weights, we can therefore characterize the damping in a linear way with the formula: $C(m) = C_{nl} + \frac{C_l - C_{nl}}{m_l}(m - m_c) = C_{nl} + \alpha(m - m_c)$. Values of the difference quotient are shown for the different springs.

Validation

mean 0.8990 std 0.1187 talk about friction in Kh

4.2.2 Motor identification

The motor can be modelled as a first order low pass filter, and the main parameters are:

- Resistance of the motor, $R [\Omega]$.
- Inductance of the motor, $L [\text{H}]$.
- Torque constant, $K_e [\text{N m A}^{-1}]$.

From motor specifications the nominal values, which are identified with n as subscript, are:

$$R_n = 1.4[\Omega], L_n = 0.0021[\text{H}], K_{en} = 0.118[\text{N m A}^{-1}]$$

The nominal cut-off frequency of the motor is $f_n = \frac{R_n}{L_n} = 106.10 [\text{Hz}]$, which is slightly above the Nyquist frequency of the system $100 [\text{Hz}]$, therefore accurate identification by means of grey or black box identification may give a bias on the identification of the cut-off frequency.

Since resistance of the motor can be identified by steady state value of the current, only inductance may have a biased value.

Experiment description

For each spring K_i , two experiments were done, with the motor attached to the cart, one with a load of 0.986 kg, and one without any load (just the cart itself).

Since we can measure the current and because of our assumption that back-emf can be ignored (hence the system is open-loop), we can directly identify the motor from the input voltage and the output current. Moreover, back-emf

doesn't influence the steady state value of the current (since it acts on the velocity of the cart, which is 0 at steady state), therefore resistance of the motor can be accurately identified. Regarding the inductance, we can not accurately identify it, since because of our sampling time the motor can almost be considered like a gain system. Therefore rising time and the use of estimation techniques will be used.

The input voltage is a square wave with period 10:

$$v(t) = \begin{cases} a, & t \in [t_0, t_0 + 5] \\ -a, & t \in [t_0 + 5, t_0 + 10] \end{cases}$$

where t_0 is the beginning time of the square wave, and $a = 3$ for K_h, K_m and $a = 2$ for K_l . In fact the current is proportional to the output torque of the motor, which ultimately acts on the cart which is attached with a spring to a wall, therefore less voltage is needed for springs with low stiffness to move the cart.

The system to be considered is:

$$L\dot{i}(t) + Ri(t) = v(t)$$

Where $i(t)$ is the current measured from the motor.

Finally, each experiment was run for a period of time of about ≈ 40 [sec].

Experiment analysis

The system considered is a stable system, therefore at steady state $\dot{i}(t) = 0$ and $R = \frac{v(t)}{i(t)}$.

Because of noise sensor the mean value was taken as steady state value, after the transient due to back-emf. Since we know the input voltage we can then calculate R .

Regarding the inductance, since the motor can be modelled as a low pass filter of the first order, its response in time has the form $i(t) = v(1 - e^{-(t/\tau)})$, where $\tau = \frac{L}{R}$. When $t = \frac{3}{\tau}$, which is about our sampling time since $\frac{3}{\tau_n} = \frac{3}{2\pi f_n} \approx 0.0045$ [rad/sec], we have $i(\frac{3}{\tau}) \approx 0.95v$. Therefore we can check if after one time step the value is approximately 0.95 times the value of the input voltage.

Ultimately we can use the function *tfest* in matlab to identify a system of the first order given the input and output data.

Experiment results

From experiments steady state value of the current seems to change a little, based on the fact whether v is positive or negative. Thus let R_1 represent mean value of resistance when v is positive, and R_2 when v is negative.

From data mean values are: $R_1 = 1.3069$ [Ω], $R_2 = 1.2330$ [Ω], with standard

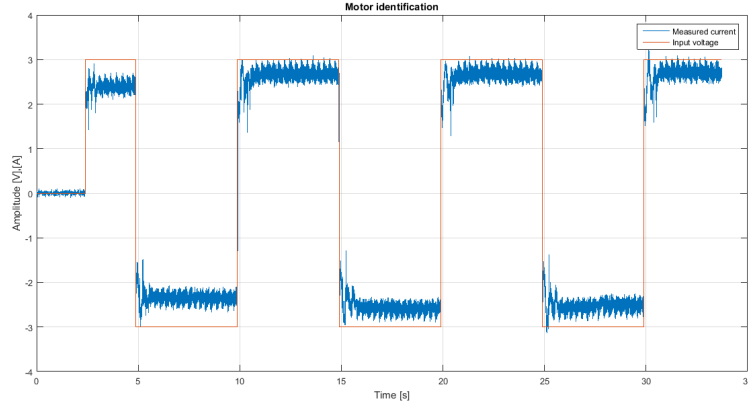


Figure 4.4: Input voltage and output current of the motor

deviation $\sigma_1 = 0.0984\Omega$, $\sigma_2 = 0.0460\Omega$.

R then can be computed using a weighted average:

$$R = \frac{\sigma_2^2 R_1 + \sigma_1^2 R_2}{\sigma_1^2 + \sigma_2^2} = 1.2462\Omega$$

And standard deviation:

$$R_{std} = \sqrt{\frac{\sigma_1^2 + \sigma_2^2}{2}} = 0.0059\Omega$$

Using the *tfest* command the average and standard deviation values for R, L are:

$$R = 1.2689\Omega, R_{std} = 0.0562\Omega$$

$$L = 0.0024\text{H}, L_{std} = 0.0002\text{H}$$

Using again a weighted average the mean value of R is $R = 1.2464\Omega$ with standard deviation 0.04Ω .

Regarding the inductance, the estimated value fits the nominal value. This can also be seen from figure 4.5 that steady state is approached in ~ 2 steps of the sampling time.

4.2.3 Overall system identification

Experiment description

Experiment analysis

Experiment results

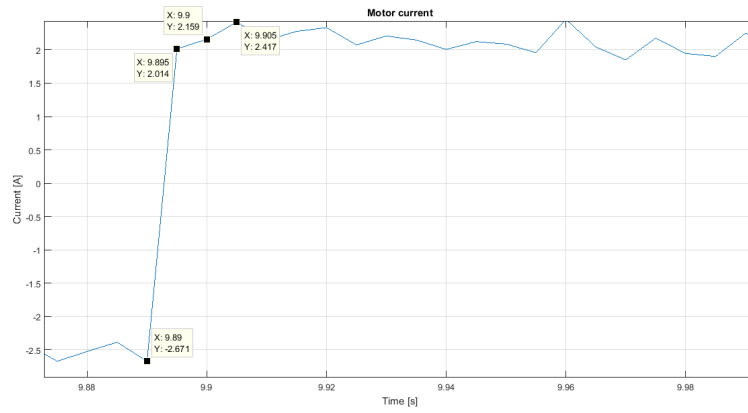


Figure 4.5: Rising time of the current, it can be seen that steady state is approached very quickly.

4.3 Gray box identification

4.4 Non-linearities identification

Chapter 5

Control of 1 Degree of Freedom

Chapter 6

Control of 2 Degree of Freedom

Chapter 7

Control of 3 Degree of Freedom

Chapter 8

Conclusions

Chapter 9

Appendix