











US \$49.83 US \$48.46 each, ≥ 3 pieces

P6SLite Wifi 180X ZOOM 4MP 25fps Hikvision protocol Humanoid car shape recognition IP Camera moudle surveillance

Reviews

Related items



P/T bracket PTZ IP Ca... 64 sold us \$18.97 US \$18.97 Choice Free shipping over US \$18

CCTV Surveillance P6... us \$**64** Free shipping

P/T bracket IP Camera... 42 sold us \$16.53 US \$16.53 Extra 2% off with coins **Choice** Free shipping over US \$18

4K 8MP 360X Zoom ... 14 sold us \$**99.65** Extra 5% off with coins Free shipping

Specifications

Hign-concerned Chemical	None	Al Functions	Smart Tracking
Shell Material	Metal	Color Night Vision	YES
IP Rating	other	App name	other

	·	•	-
		Download the AliExpress app	Salto de Pirapora/EN/ USD V Hi, Robson Account Cart
Digital Zoom	8X	Optical Zoom	other
Megapixels	4MP	Power Supply	Normal
Installation	Normal	is_customized	Yes
Minimum Illumination(Lux)	0.3	Viewing Angle	60°
Video Compression Format	H.264,H.265	Power Supply(V)	12V
Alarm Action	FTP Photo,Email Photo,Local Alarm	Power Consumption(W)	2W
Sensor Brand	Omnivision	Sensor	CMOS
Model Number	JH4W-Q-180X	Supported Operating Systems	Windows Vista, Windows 7, Windows 2008
Lens (mm)	3.3-97mm	Connectivity	IP/Network Wireless
High Definition	4.0 Megapixels	Style	Box Camera
Brand Name	YUCHENG	Origin	Mainland China
Certification	CE	Smart home platform	other


Description Report Item




P65LITE 4MP 3UX ZUUM WIREIESS WITH IP Camera




WIFI Bluetooth connection video

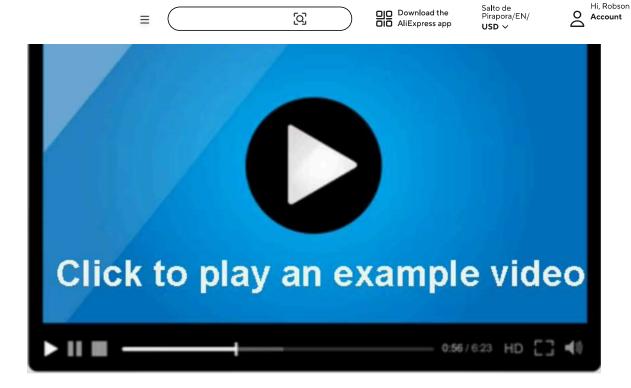

Supports multiple languages

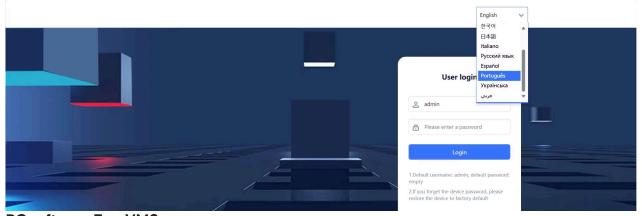


PC software: EasyVMS:

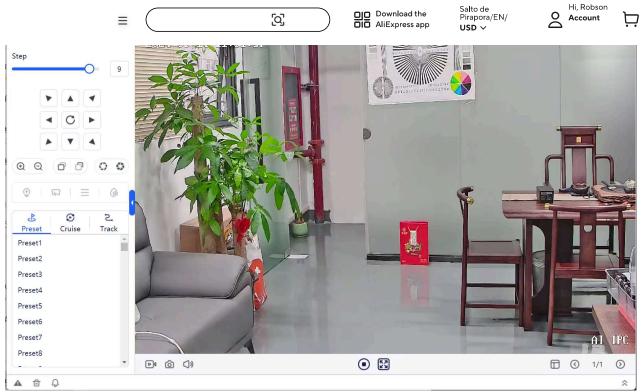

Mobile APP name: P6SLite



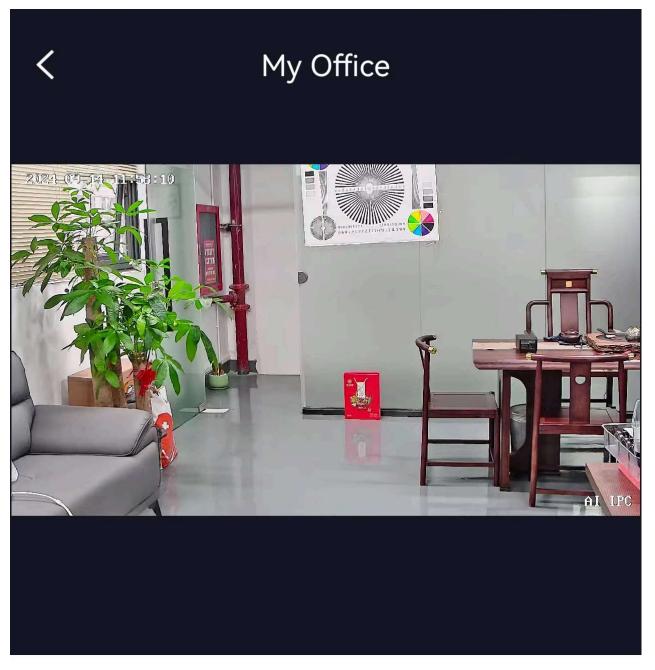

Live Playback




Record



Talk



PTZ

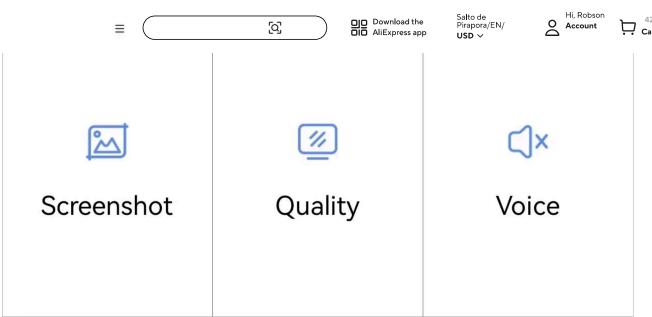


Smart function

- Support intelligent detection functions such as regional intrusion detection, cross-border detection, and motion detection.
- Support the function of resuming transmission after disconnection to ensure that the video is not lost, and cooperate with Smart NVR to realize the secondary intelligent retrieval, analysis and concentrated playback of event video.
- Support timing tasks, one-key to Home position
- Supports H.265 high-efficiency compression algorithm, which can greatly save storage space.

Image related

- Support up to 2560*1440@25fps HD picture output.
- Support starlight level ultra-low illumination, 0.03Lux/F1.8 (color), 0.01Lux/F1.8 (black and white), 0 Lux with IR.
- Support 30X zoom and 6X digital zoom(Gesture or button control).
- Support three-stream technology, each stream can be independently configured with resolution and frame rate.
- Supports wide dynamic range up to 60dB, suitable for backlit environment monitoring.
- Support 3D digital noise reduction, strong light suppression.


Support corridor auto ZOOM tracking mode

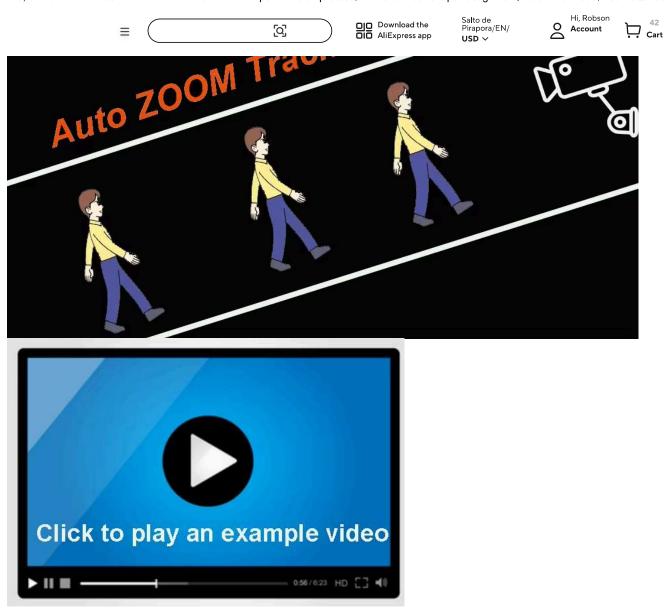

How to Turn ON/OFF Tracking


Button Star Track for Turn on Corridor mode tracking Button Stop Track for Turn off Corridor mode tracking




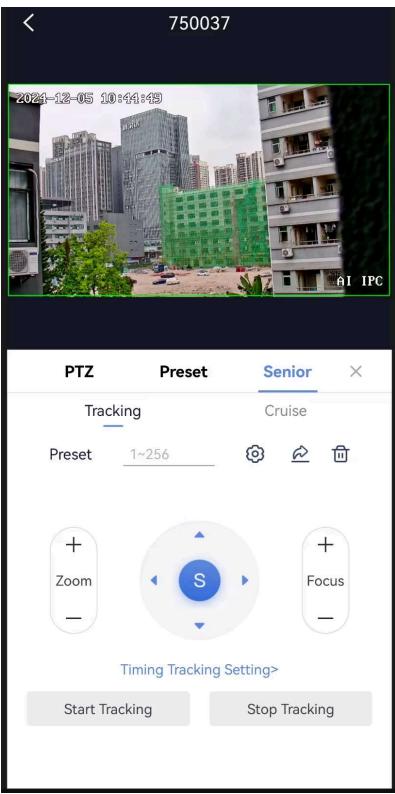


You can use Preset Turn ON/OFF tracking too:

254+call for turn on auto zoom tracking 254+set for turn off auto zoom tracking

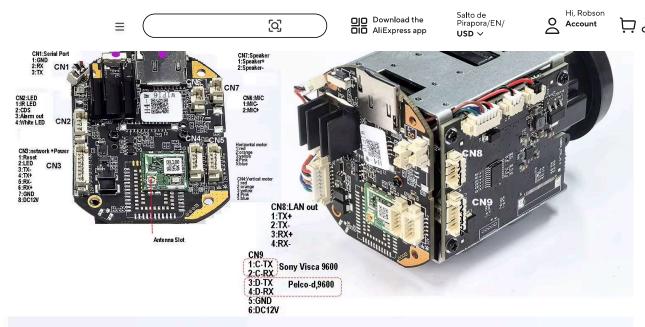

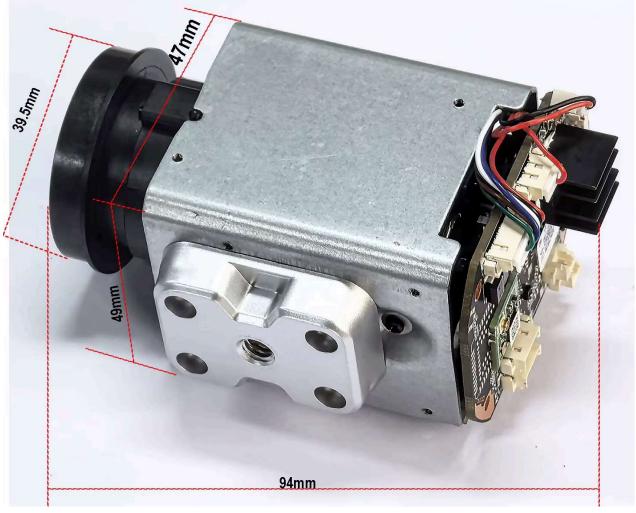


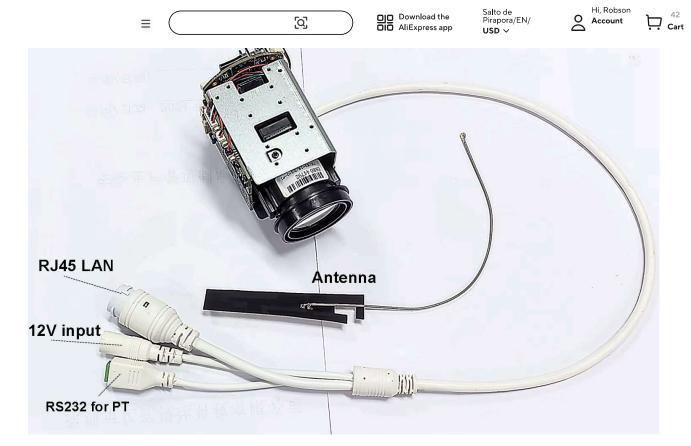



	Basic parameters (M-H4W-Y4X)			
Chip solution	Hisilicon			
Minimum illumination	Color:0.03Lux @(F1.8,AGC ON);B/W:0Lux @(F1.8,AGC ON),0 Lux with IR			
	Main stream:25fps(2560×1440,2304×1296,1920×1080,1280×960,1280×720),			
Resolution frame rate	Substream:25fps(800×448,640×360,352×288)			
Video Encoding format	H.265+/H.265/H.264			
Audio Encoding format	G711			
IR night vision	Support			
White balance	Incandescent lamp,warm light,fluorescent lamp,natural light,manual white balance,auto white balance,lock white balance			
Anti-flash mode	50HZ,60HZ,OFF			
Aperture type	Manual aperture,auto iris			
Exposure time	Auto,1/25,1/35,1/40,1/50, 1/60,1/100,1/120,1/240,1/480,1/960,1/1000,1/2000,1/4000,1/8000,1/10000,1/10000			
Gain	Auto,6Db,12dB,18dB,24dB,30dB,36dB,42dB			
3D noise reduction	Auto,weak,general,strong			
BLC	OFF/ON			
WDR	Auto,weak,general,strong			
IR Image mode	Standard mode, Face without exposure, License plate mode			
Digital ZOOM	Support 6X digital zoom			
Focus mode	Fully automatic, semi-automatic, manual			
	LENS			
focal length	3.3-97mm,30X Optics ZOOM, support 6x digital zoom,Total 180x zoom			
Zoom speed	about 6 seconds (optical, wide-angle-telephoto)			
Horizontal-viewing angle	About 63-2 degrees (wide angle-telephoto)			
Close-up distance	1.5-100meters (wide angle-telephoto)			
Number of aperture	F1.4-F2.5			
	Features			
Smart Detect	Face and humaniod detection, area intrusion detection, cross-border detection, entering area detection, fast motion detection, motion detection, video occlusion detection			
Smart record	Motion detection recording, humanoid detection recording, timing recording			
Smart image Enhance	60DB WDR, Strong light suppression, face overexposure prevention, smart infrared			
Smart code	Smart 265/264, Dynamic code stream, fixed code stream, low code stream			
Proportional zoom	Support			
Power-Off Memory	Support			
	Network			
Network protocol	IPv4,HTTP,HTTPS ,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTCP,RTP,TCP/IP,DHCP,PPPoE,RTSP			

	■ Download the Pirapora/EN/ USD > Download the Disporation AliExpress app			
preview videos	MAX 3 user sametime preview			
Wireless wifi	support wifi6			
Time	time.windows.com,time.nist.gov,time.kriss.re.kr,time.nuri.net etc.,Network Time Protocol			
	Alarm			
Snapshot	Support Remote timing snapshot,			
Motion detection	At most 4 respective regions			
Humanoid detection	Support Humanoid detection record, snapshot, alarm ouput, tracking			
Alarm linkage	E-mail Alarm and Send with Picture,Save Picture on the FTP Server(not support video), Relay out, alarm send message to mobile phone APP			
	Record			
Record	Support computer local record, Browser record, P2P client software record. NVR record			
SD card	Not support			
	Interface			
Power interface	DC12V			
Network	RJ45 10Base-T/100Base-TX,WIFI			
Audio	Mic Build in camera, and support one 3W speaker			
SD card	MAX support 512GB			
Reset button	one external reset button			
	General specification			
Power	Max 3W			
Working	-35°C-65°C; humidity is less than 90%			
Protection grade	IP66; TVS 4000V lightning protection, anti-surge, anti-surge, in line with GB/T17626.5 level four standards			
Weight	0.3KG			



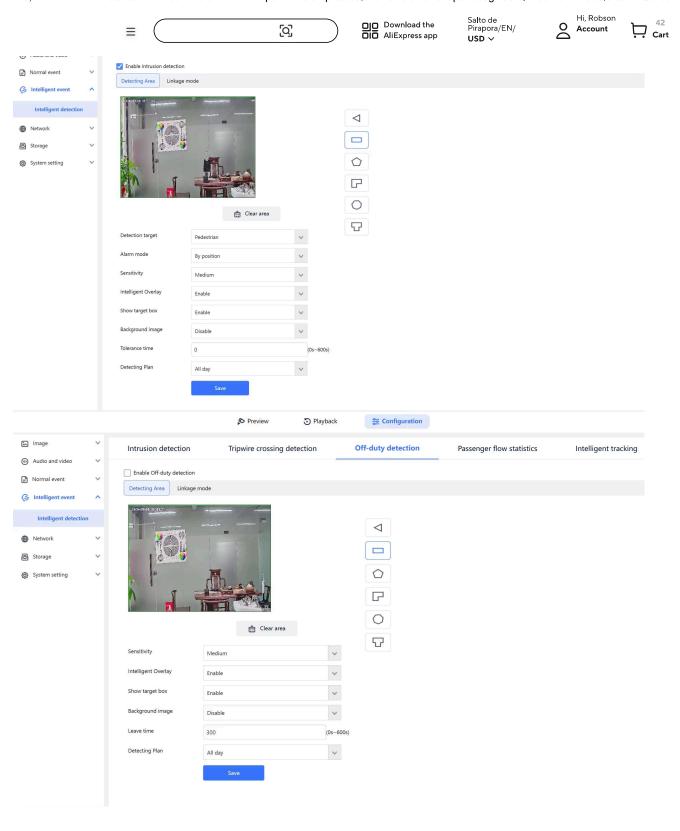

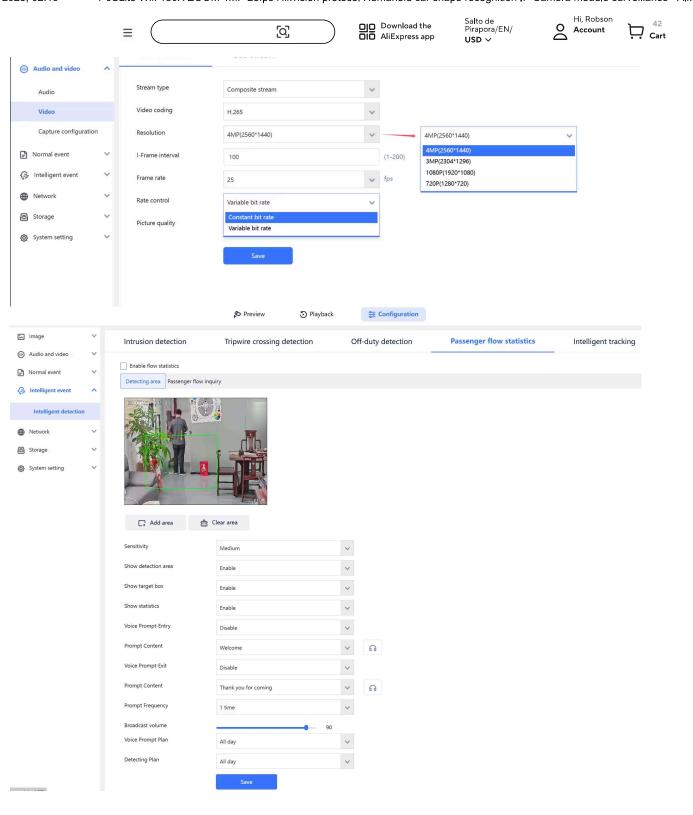

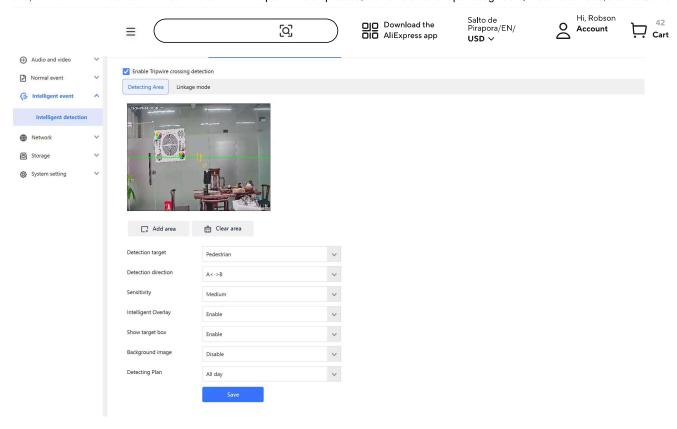

Package list:

1x 4MP wifi IP Camera moudle

1x wifi antenna

1x DC12V 1A Power adapter

1x Manual and all software



98.6% Positive Feedback | 1455 Followers

Recommended from YUCHENG Official Store >

5MP Wifi YouTuBe live streamin... 24 sold

64 sold

13 sold

P/T bracket PTZ IP Camera 270... 360X ZOOM CamHipro 4G Wir... 4K 8MP 30fps 15X ZOOM POE... IMX415 4K 8MP 30f

3 sold

us \$53.48 US \$53.48

us \$18.97 US \$18.97

us \$101.89 US \$101.89

43 sold us \$77.48 US \$77.48

us \$47

Choice Free shipping over US \$18 Choice Free Shipping Over US \$18

29/01/2025, 02:10

Download the AliExpress app

Salto de Pirapora/EN/ USD ✓ O Account

☐ 42 Cart

Customer Reviews Specifications **9 Description** Store More to love

People also searched

This product belongs to $\boldsymbol{\mathsf{Home}}$

Help

 $Help \ Center, Disputes \& \ Reports, Buyer \ Protection, Report \ IPR \ infringement, Regulated \ Information, Integrity \ Compliance, Transparency \ Center, Submit \ report \ (non-time of the protection) \ Protection \ Prot$

AliExpress Multi-Language Sites

Russian, Portuguese, Spanish, French, German, Italian, Dutch, Turkish, Japanese, Korean, Thai, Vietnamese, Arabic, Hebrew, Polish

Browse by Category

 $\label{eq:local_problem} \textbf{All Popular, Product, Promotion, Low Price, Great Value, Reviews, Blog, Video}$

Alibaba Group

Alibaba Group Website, AliExpress, Alimama, Alipay, Fliggy, Alibaba Cloud, Alibaba International, AliTelecom, DingTalk, Juhuasuan, Taobao Marketplace, Tmall, Taobao Global, AliOS, 1688