

PH223: Physics for Chemists and Mechanical Engineers

R. Todd Lines

F 2024

Contents

Copyright Information	xv
1 Where We Start	1
1.1 What is this class?	1
1.2 Simple Harmonic Motion	3
1.3 Simple Harmonic Motion	3
1.3.1 Hooke's Law	4
1.4 Mathematical Representation of Simple Harmonic Motion	5
1.4.1 Other useful quantities we can identify	7
1.4.2 Velocity and Acceleration	8
1.4.3 Comparison of position, velocity, acceleration	9
1.5 An example of oscillation	11
1.5.1 A second example	12
1.5.2 A third example	13
1.6 Energy of the Simple Harmonic Oscillator	17
1.7 Circular Motion and SHM	19
1.8 The Pendulum	21
1.9 Damped Oscillations	23
1.10 Driven Oscillations and Resonance	26
2 What is a Wave?	31
2.1 What is a Wave?	31
2.1.1 Criteria for being a wave	31
2.1.2 Longitudinal vs. transverse	32
2.1.3 Examples of waves:	32
2.2 Wave speed	33
2.3 Example: Sound waves	34
2.4 One dimensional waves	36
3 Waves in One and More Dimensions	39
3.1 Sinusoidal Waves	39
3.1.1 Parts of a wave	40
3.1.2 Sinusoidal waves on strings	47
3.2 The speed of Waves on Strings	48

3.3	Waves in two and three dimensions	50
4	Light, Sound, Power	53
4.1	Waves in matter-Sound	53
4.1.1	Periodic Sound Waves	53
4.2	Speed of Sound Waves	57
4.2.1	Boundaries	57
4.3	Waves in fields-Light	58
4.3.1	Speed of Electromagnetic waves	59
4.4	Power and Intensity	59
4.4.1	Intensity	60
4.4.2	Sound Levels in Decibels	61
5	Doppler Effect and Superposition	65
5.1	Doppler Effect	65
5.1.1	Doppler effect in light	71
5.2	Superposition Principle	72
5.2.1	Consequences of superposition	74
5.3	Superposition and Doppler: Shock waves	76
5.4	Importance of superposition	77
6	Standing Waves	79
6.1	Mathematical Description of Superposition	79
6.2	Reflection and Transmission	83
6.2.1	Case I: Fixed rope end.	83
6.2.2	Case II: Loose rope end.	84
6.2.3	Case III: Partially attached rope end	86
6.3	Mathematical description of standing waves	87
6.4	Standing Waves in a String Fixed at Both Ends	89
6.4.1	Starting the waves	91
6.4.2	Musical Strings	92
7	Light and Sound Standing waves	93
7.1	Sound Standing waves (music)	93
7.1.1	Example: organ pipe	97
7.2	Lasers and standing waves	98
7.3	Standing Waves in Rods and Membranes	99
8	Single Frequency Interference, Multiple Dimensions	103
8.1	Mathematical treatment of single frequency interference	104
8.1.1	Example of two wave interference: Stealth Fighter	106
8.1.2	Example of two wave interference: soap bubble	111
8.2	Single frequency interference in more than one dimension	114

9 Multiple Frequency Interference	119
9.1 Beats	119
9.2 Non Sinusoidal Waves	122
9.2.1 Music and Non-sinusoidal waves	122
9.2.2 Vibrometry	128
9.2.3 Fourier Series: Mathematics of Non-Sinusoidal Waves	128
9.2.4 Example: Fourier representation of a square wave.	129
9.3 Frequency Uncertainty for Signals and Particles	133
10 Interference of light waves	137
10.1 The Nature of Light	137
10.1.1 Physical Ideas of the nature of Light	137
10.2 Measurements of the Speed of Light	139
10.2.1 Rømer's Measurement of the speed of light	139
10.2.2 Fizeau's Measurement of the speed of light	140
10.2.3 Faster than light	141
10.3 Interference and Young's Experiment	142
10.3.1 Constructive Interference	144
10.3.2 Destructive Interference	146
10.4 Double Slit Intensity Pattern	146
10.4.1 Electric field preview	147
10.4.2 Superposition of two light waves	147
11 Many slits, and single slits	153
11.1 Diffraction Gratings	153
11.1.1 Resolving power of diffraction gratings	156
11.2 Single Slits	158
11.3 Narrow Slit Intensity Pattern	160
11.3.1 Intensity of the single-slit pattern	162
12 Apertures and Interferometers	165
12.1 Circular Apertures	165
12.2 Interferometers	168
12.2.1 The Michelson Interferometer	168
12.2.2 Holography	170
12.3 Diffraction of X-rays by Crystals	171
12.4 Transition to the ray model	172
13 Ray Model	175
13.1 The Ray Approximation in Geometric Optics	175
13.1.1 The ray model and phase	176
13.1.2 Coherency	180
13.2 Reflection	180
13.2.1 Law of reflection	181
13.2.2 Retroreflection	182
13.3 Reflections, Objects, and seeing	184

14 Refraction and images	187
14.1 Refraction	188
14.1.1 Speed of light in a material	189
14.1.2 Change of wavelength	191
14.1.3 Index of refraction and Snell's Law	192
14.2 Total Internal Reflection	193
14.2.1 Fiber Optics	196
14.3 Images Formed by Refraction	196
15 Dispersion and Thin Lenses	201
15.1 Dispersion	201
15.1.1 Calculation of n using a prism	203
15.1.2 Filters and other color phenomena	205
15.2 Ray Diagrams for Lenses	206
15.2.1 Thin Lenses	211
15.2.2 Virtual images	213
15.2.3 Diverging Lenses	214
16 Image Formation	215
16.1 Thin lenses and image equation	215
16.1.1 Flat Refracting surfaces	219
16.2 Thin Lenses	220
16.2.1 Derivation of the lens equation	220
16.2.2 Sign Convention	225
16.2.3 Magnification	226
16.3 Images formed by Mirrors	227
16.3.1 Image from a Flat Mirror	227
16.4 Mirror reversal	228
16.4.1 Concave Mirrors	228
16.4.2 Paraxial Approximation for Mirrors	229
16.4.3 Mirror Equation	231
16.4.4 Focal Point for Mirrors	231
16.4.5 Ray Diagrams for Mirrors	232
16.4.6 Spherical Aberration	234
17 Optical systems	237
17.1 Combinations of lenses	237
17.2 The Camera	240
18 Eyes and magnifiers	245
18.1 The Eye	245
18.1.1 Nearsightedness	247
18.1.2 Farsightedness	247
18.1.3 Diopters	248
18.1.4 Color Perception	248
18.2 Optical Systems that Magnify	249

18.2.1 Simple Magnifier	249
18.2.2 The Microscope	252
18.3 Telescopes	254
18.3.1 Refracting Telescopes	254
18.3.2 Reflecting Telescopes	255
19 Resolution and Charge	257
19.1 Resolution	257
19.2 Charge model	262
19.2.1 Evidence of Charge	262
19.2.2 Types of Charge	264
19.2.3 Movement of Charge	264
19.2.4 Flow of Charge	266
19.2.5 Charging by Induction	267
19.2.6 Charging by Conduction	267
20 Electric charge	271
20.1 Charge	271
20.1.1 Conservation of charge	272
20.2 Insulators and Conductors	272
20.2.1 Potential Diagrams for Molecules	272
20.2.2 Building a solid	273
20.3 Conduction in solids	276
20.3.1 Metals	276
20.3.2 Insulators	277
20.3.3 Semiconductors	278
20.3.4 Charging and discharging conductors	278
20.4 Note on drawing charge diagrams	281
21 Coulomb's Law and Lines of Force	283
21.1 Coulomb's Law	283
21.1.1 Permittivity of free space	287
21.2 Direction of the force	287
21.3 More than two charges	288
21.4 Fields	295
21.5 Field Lines	299
21.6 On-Line demonstrations	302
22 Electric Fields of Standard Charge Configurations Part I	303
22.1 Standard Charge Configurations	303
22.2 Point Charges	304
22.2.1 Two charges	304
22.2.2 Vector nature of the field	305
22.2.3 Three charges	311
22.3 Combinations of many charges	313
22.3.1 Line of Charge	314

22.3.2	Semi-infinite sheet of charge	314
22.3.3	Sphere of charge	314
22.4	On-Line Visualizations	316
23	Electric Fields of Standard Charge Configurations Part II	317
23.1	Fields from Continuous Charge Distributions	317
23.1.1	Line of charge	319
23.1.2	Ring of charge	323
24	Motion of Charged Particles in Electric Fields	327
24.1	Sheet of Charge	327
24.1.1	Spheres, shells, and other geometries.	332
24.2	Constant electric fields	332
24.2.1	Capacitors	332
24.3	Particle motion in a uniform field	334
24.3.1	Millikan	335
24.3.2	Free moving particles	337
25	Dipole motion, Symmetry	343
25.1	Dipole motion in an electromagnetic field	343
25.1.1	Induced dipoles	348
25.1.2	Non-uniform fields and dipoles	349
25.2	Symmetry	351
25.2.1	Combinations of symmetric charge distributions	354
26	Electric Flux	357
26.1	The Idea of Flux	357
26.1.1	The idea of electric flux	358
26.1.2	Flux and Curved Areas	360
26.1.3	Closed surfaces	362
26.1.4	Flux example: a sphere	362
26.1.5	Flux example: a long straight wire	368
27	Gauss' Law and its Applications	371
27.1	Gauss' Law	371
27.2	Examples of Gauss' Law	376
27.2.1	Gauss's law strategy	382
27.3	Derivation of Gauss' Law	382
28	Conductors in Equilibrium, Electric Potentials	387
28.1	Conductors in Equilibrium	387
28.1.1	In Equilibrium, excess charge is on the Surface	388
28.1.2	The Electric Field is Zero <i>Inside</i> a Conductor	388
28.1.3	Return to charge being on the surface	390
28.1.4	Field lines leave normal to the surface	391
28.1.5	Charge tends to accumulate at sharp points	393
28.2	Electrical Work and Energy	394

28.2.1	Energy of a Charge in a uniform field	394
28.2.2	Electric and Gravitational potential energy compared . . .	395
29	Electric potential Energy	397
29.1	Point charge potential energy	397
29.1.1	Gravitational analog	397
29.1.2	Point charges potential	402
29.1.3	Three point charges.	404
29.2	Dipole potential energy	405
29.3	Shooting α -particles	407
30	Electric Potentials	409
30.0.1	Electric Potential Difference	410
30.0.2	Electric Potential	412
30.1	Example, potential of a capacitor	413
30.1.1	Equipotential Lines	415
30.2	Electron Volt	416
31	Electric potential of charges and groups of charges	421
31.1	Point charge potential	421
31.1.1	Two point charges	429
31.1.2	Lots of point charges	431
31.2	Potential of groups of charges	431
31.2.1	Electric potential due to a uniformly charged disk	432
32	Connecting potential and field	437
32.1	Finding the potential knowing the field	437
32.1.1	Finding the potential from the field.	438
32.2	Sources of electric potential	442
32.3	Electrochemical separation of charge	443
32.4	batteries and emf	443
33	Calculating fields from potentials	451
33.1	Finding electric field from the potential	451
33.2	Geometry of field and potential	455
33.3	Conductors in equilibrium again	460
33.3.1	Non spherical conductors	461
33.3.2	Cavities in conductors	462
34	Capacitance	465
34.1	Capacitance and capacitors	465
34.1.1	Capacitors and sources of potential	468
34.1.2	Single conductor capacitance	468
34.1.3	Capacitance of two parallel plates	469
34.1.4	Capacitance of a cylindrical capacitor	470
34.2	Combinations of Capacitors	473

35 Dielectrics and Current	477
35.1 Energy stored in a capacitor	477
35.1.1 Field storage	479
35.2 Dielectrics and capacitors	481
35.3 Induced Charge	483
35.4 Electric current	485
 36 Current, Resistance, and Electric Fields	 491
36.1 Current and resistance	491
36.2 Current density	497
36.3 Conservation of current	499
 37 Ohm's law	 503
37.1 Conductivity and resistivity	503
37.1.1 Resistivity	505
37.1.2 Superconductivity	506
37.1.3 Ohm's law	507
37.1.4 Life History of an electric current	508
37.1.5 Emf	509
37.1.6 Ohmic or nonohmic	510
37.2 Power in resistors	512
37.3 Magnetism	513
 38 Magnetic Field	 517
38.1 Fundamental Concepts in the Lecture	517
38.2 Discovery of Magnetic Field	517
38.2.1 Making the field-moving charges	523
 39 Current loops	 527
39.1 Magnetic field of a current	527
39.1.1 The field due to a square current loop	529
39.1.2 Long Straight wires	533
39.2 Magnetic dipoles	533
 40 Ampere's law, and Forces on Charges	 541
40.1 Ampere's Law	541
40.2 Magnetic Force on a moving charge	549
40.3 Motion of a charged particle in a B -Field	551
40.3.1 The velocity selector	555
40.3.2 Bainbridge Mass Spectrometer	556
40.3.3 Classical Cyclotron	558
40.4 Hall Effect	559

41 Magnetic forces on wires	563
41.1 Magnetic forces on Current-Carrying wires	563
41.1.1 Force between two wires	564
41.2 Torque on a Current Loop	565
41.2.1 Galvanometer	569
41.2.2 Electric Motors	569
42 Permanent Magnets, Induction	573
42.1 Finally, why bar magnets work	573
42.1.1 Quantum effects	575
42.1.2 Ferromagnetism	577
42.1.3 Magnetization vector	578
42.1.4 Solenoid approximation	579
42.1.5 Magnetic Field Strength (another confusing name)	580
42.1.6 Macroscopic properties of magnetic materials	581
42.1.7 Ferromagnetism revisited	582
42.1.8 Paramagnetism	584
42.1.9 Diamagnetism.	585
42.2 Back to the Earth	585
42.3 Induced currents	586
43 Induction	589
43.1 Motional emf	589
43.2 Eddy Currents	592
43.3 Magnetic flux	593
43.3.1 Non uniform magnetic fields	595
44 Faraday and Lenz	599
44.1 Lenz	600
44.2 Faraday	601
44.2.1 Faraday's law of Magnetic Induction	602
44.2.2 Return to Lenz's law	603
44.3 Pulling a loop from a magnetic field.	603
45 Induced Fields	607
45.1 Generators	607
45.1.1 DC current from a generator	611
45.1.2 Back emf	612
45.1.3 rms voltage	612
45.2 Transformers	615
45.3 Induced Electric Fields	617
45.4 Relationship between induced fields	620
45.5 Electromagnetic waves	622

46 Inductors	625
46.1 Self Inductance	625
46.1.1 Inductance of a solenoid ¹	627
46.2 Energy in a Magnetic Field	628
46.2.1 Energy Density in the magnetic field	630
46.2.2 Oscillations in an LC Circuit	631
46.2.3 The RLC circuit	636
46.3 Return to Non-Conservative Fields	639
46.3.1 RL Circuits: Solving for the current as a function of time	641
46.4 Magnetic Field Energy in Circuits	643
46.5 Mutual Induction	645
46.5.1 Example: Rectangular Loop and a coil	647
47 The Electromagnetic field	651
47.1 Relative motion and field theory	651
47.1.1 Galilean transformation	654
47.2 Field Laws	663
47.2.1 Gauss' law	663
48 Field Equations and Waves in the Field	667
48.1 Displacement Current	667
48.2 Maxwell Equations	673
49 Waves in the Field	675
49.0.1 Rewriting of Faraday's law	676
49.0.2 Rewriting of the Maxwell-Ampere Law	679
49.1 Wave equation for plane waves	680
49.2 Properties of EM waves	682
49.2.1 Energy in an EM wave	682
49.2.2 Intensity of the waves	683
49.2.3 Momentum of light	685
49.2.4 Antennas Revisited	687
49.3 The Electromagnetic Spectrum	688
49.3.1 Summary	690
49.3.2 Photons	690
50 Polarization	693
50.1 Polarization of Light Waves	693
50.1.1 Polarization by removing all but one wave orientation	695
50.1.2 Polarization by reflection	696
50.1.3 Birefringence	698
50.1.4 Optical Stress Analysis	700
50.1.5 Polarization due to scattering	700

¹Think of this like the special case of a capacitor made from two flat large plates, the parallel plate capacitor. It was somewhat ideal in the way we treated it. Our treatment of the special case of a coil will likewise be somewhat ideal.

50.1.6 Optical Activity	701
50.1.7 Laser polarization	701
50.2 Retrospective	701
A More insight into inductance and non-conservative fields	703
B Summary of Right Hand Rules	709
B.1 PH121 or Dynamics Right Hand Rules	709
B.1.1 Right hand rule #0:	709
B.1.2 Right hand rule #0.5:	710
B.2 PH223 Right Hand Rules	711
B.2.1 Right hand rule #1:	711
B.2.2 Right hand rule #2:	712
B.2.3 Right hand rule #3:	712
B.2.4 Right Hand Rule #4:	712
C Some Helpful Integrals	715
D Some Physical Constants	717

Copyright Information

Copyright ©2024 by Author. Permission to use this work is granted for BYU-I students and faculty for educational purposes. For all other uses, contact the author for licensing.

Chapter 1

Where We Start

Fundamental Concepts

1.1 What is this class?

This class is designed to teach the physics of wave motion, electricity and magnetism, and optics. We have three major goals. One is to teach the physics of electrical attraction that forms the basis for chemical bonding. The same physical principles of electricity and magnetism affect many electrical designs as well, so this is also a goal for our mechanical engineers. The second goal is to teach wave motion well enough that the quantum nature of atoms and molecules make sense as our chemists take physical chemistry. Of course wave motion is also a major design tool for mechanical engineers and is also a major design problem for structural designs. The third goal is to teach optics enough that both chemists and engineers can understand the basics of optical instruments that will be used in chemistry or machine vision. For the chemists we need to understand the fundamental physics. For the engineers we need practical physics that can affect mechanical systems that our engineers will design, build, or test. We will need to spend time both on the fundamentals and on the practical use of those fundamentals.

In engineering, the design parameters are often the goal. In science, the physical relationship is the goal. For design engineers, both views are useful and important. The design is no good if the underlying principles preclude it from working!

As an example, I once worked on an optics project with a strong mechanical component. The system had scanning mechanisms that were fantastic mechanical devices. It was part of an aircraft and integrated into the aircraft system. But the optical system required two lasers that were separated in wavelength by

only a few nanometers. The chief engineer knew how to build all the systems, but did not understand the physics that required the close wavelength spacing. He judged that the difficulty in building the device at that wavelength spacing outweighed any benefit, and he changed the specs to give two wavelengths that were fifty nanometers apart. Fifty nanometers is a pretty small tolerance. Surely it would be good enough! The resulting product did not work. For two years he tried to fine tune the scanners, and servos to make it work. After ten million dollars and two years, he finally moved the wavelengths closer. The cost of the change was an extra \$100,000 dollars, about 1/100 of the cost of the mistake. The system worked, but since this was a race to market, the time lost and the reputation lost on the faulty product destroyed the viability of the business. It is a bad day when you and your friends lose your jobs because you made a fundamental physics mistake!

Physics courses stress how we know what we know. They support the discipline called *system engineering*, which deals with the design of new and innovative products. As a more positive example, the National Weather service often releases requests for proposed weather sensing equipment. Their request might say something like the following:

Measure the moisture of the soil globally from an altitude of 800 km with an accuracy of 5%. The suggested instrument is a passive microwave radiometer.

The job of a system engineer is to determine what type of instrument to build. What is the underlying principle that it will use to do its job? What signal processing will it need? What mechanical and electrical systems will support this? This must all be determined before the bearings and slip-rings, and structures can be designed and built.

The radiometer design that came out of this project is flying today (or one very like it based on the original design) and is a major part of the predictive models that tell us what the weather will be in a few days.

Because this type of reasoning is our goal, we will not only do typical homework problems, but we will also work on our conceptual understanding.

I will also emphasize a problem solving method that I used with my engineering team in industry. It is a structured approach to finding a solution that emphasizes understanding as well as providing a numeric answer for a particular design. When you are part of an innovative design team, you will have to repeat a calculation over and over again each time some other part of the sign changes. If you have produced a symbolic solution, a numerical model, or at least a curve, you are ready for any changes in specifications. But if you have just “found the answer” you will have to find that answer again every time the overall design specs change. This approach is too slow, and, at least in my team, would have you finding a new job because our design efforts were always done against exacting schedules and budgets. By thinking in a structured method, with an eye toward symbolic answers or relationships rather than end numbers, you will learn to be a more valuable engineer. The process we will use is the

same approach I used to teach my new engineers in the defense industry. It has been proven useful over and over for decades.

This same problem solving process is useful in chemistry, particularly as you study physical chemistry.

So let's get started. To understand waves, we need to get the waves moving. You studied Oscillation in Dynamics or PH121. Oscillating systems are often the disturbance that starts a wave. We will begin with a review of oscillation.


1.2 Simple Harmonic Motion

You are, no doubt, an expert in simple harmonic motion (SHM) after your PH121 or Dynamics class. But this will get us warmed up for the semester. In class we will use our clickers and go through a few questions. We will usually use the clicker system to answer a few questions to test your understanding of the reading material. This allows me to not waste time on things you already know, and to help me find the ones you don't. Most lectures will consist of me asking you if you have questions, and then if you don't, I will ask you "clicker questions." Where there is reason to believe you don't understand (with a normal cutoff of 80% of the class answering correctly being our definition of "understanding"), I will use the material from these written lectures to teach the concepts. So we won't always go through all the ideas and skills demonstrated in these written lectures. If you feel you would have liked more explanation on something but we did not cover that concept in class because most people were "getting it," you can come and see me in my office.

1.3 Simple Harmonic Motion

Let's consider a mass attached to a spring resting on a frictionless surface¹. This mass-spring system can oscillate.

In the position shown the spring is neither pushing nor pulling on the mass. We will call this position the *equilibrium position* for the mass.

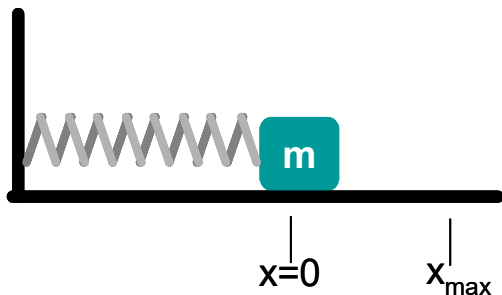

¹Yes, I know there are no actual frictionless surfaces, but we are starting out at freshman level physics, so we will make the math simple enough that a freshman could do it by making simplifying assumptions. In this case, that the surface is frictionless.

Definition 1 *Equilibrium Position:* The position of the mass when the spring is neither stretched nor compressed.


1.3.1 Hooke's Law

A law in physics is a mathematical expression of a mental model of how the universe works. Long ago it was noticed that the pull of a spring grew in strength as the spring was pulled out of equilibrium. The mathematical expression of this is

$$F_s = -k\Delta x_{eq} \quad (1.1)$$

The force, F_s is directly proportional to the displacement from equilibrium, Δx_{eq} . Since a man named Hooke wrote this down, it is called Hooke's law. It should be familiar from your PH121 experience.

Hooke's Law is, strictly speaking, not a law that is always obeyed. It is a good model for most springs as long as we don't stretch them too far. We will often use the word "law" to mean *an equation that gives a basic relationship*. In that sense, Hook's law is a law.

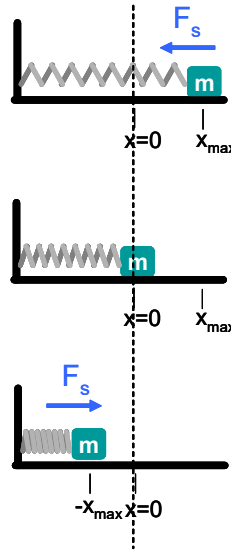

Lets write Hooke's Law using Newton's second Law

$$\Sigma F_x = ma_x$$

If we assume no friction, we have just

$$-k\Delta x_{eq} = ma_x$$

We can write this as

$$a_x = -\frac{k}{m}\Delta x_{eq} \quad (1.2)$$

This expression says the acceleration is directly proportional to the position, and opposite the direction of the displacement from equilibrium. We can see that the spring force tries to oppose the change in displacement. We call such a force a *restoring force*.

Definition 2 *Restoring force: A force that is always directed toward the equilibrium position*

This is a good definition of *simple harmonic motion*.

1.4 Mathematical Representation of Simple Harmonic Motion

Recall from your PH121 classes that acceleration is the second derivative of position

$$a = \frac{dv}{dt} = \frac{d^2x}{dt^2}$$

Hook's Law tells us

$$F = ma = -k(x - x_{eq})$$

where x_{eq} is the equilibrium location. Suppose we define our coordinate system so that x_{eq} is right at the origin. Then $x_{eq} = 0$ and we would have

$$\begin{aligned} F &= ma = -k(x - 0) \\ m \frac{d^2x}{dt^2} &= -kx \end{aligned}$$

We have a new kind of equation. If you are taking this freshman physics class as a... well... freshman, you may not have seen this kind of equation before. It is called a differential equation. But really the chances are that you are a sophomore or junior (or even a senior) and have lot of experience with differential equations. The solution of this equation is a function or functions that will describe the motion of our mass-spring system as a function of time. We will need to know this function, so let's see how we can find it.

Start by defining a quantity ω as

$$\omega^2 = \frac{k}{m} \quad (1.3)$$

why define ω^2 ? Because experience has shown that it is useful to define ω this way! But you probably remember ω as having to do with rotational speed, and from trigonometry (trig) you may remember using ω to mean angular frequency

$$\omega = 2\pi f$$

so our definition of ω may hint that k/m will have something to do with the frequency of oscillation of the mass-spring system.

We can write our differential equation as

$$\frac{d^2x}{dt^2} = -\omega^2 x \quad (1.4)$$

To solve this differential equation we need a function whose second derivative is the negative of itself. We know a few of these

$$\begin{aligned} x(t) &= A \cos(\omega t + \phi_o) \\ x(t) &= A \sin(\omega t + \phi_o) \end{aligned} \quad (1.5)$$

where A , ω , and ϕ_o are constants that we must find. Let's choose the cosine function and explicitly take its derivatives.

$$\begin{aligned} x(t) &= A \cos(\omega t + \phi_o) \\ \frac{dx(t)}{dt} &= -\omega A \sin(\omega t + \phi_o) \\ \frac{d^2x(t)}{dt^2} &= -\omega^2 A \cos(\omega t + \phi_o) \end{aligned}$$

Let's substitute these expressions into our differential equation for the motion

$$\begin{aligned} \frac{d^2x}{dt^2} &= -\omega^2 x \\ -\omega^2 A \cos(\omega t + \phi_o) &= -\omega^2 A \cos(\omega t + \phi_o) \end{aligned}$$

As long as the constant ω^2 is our $\omega^2 = k/m$ we have a solution (now you know why we defined it as ω^2 !). Since from trig we remember ω as the angular frequency.

$$\omega = 2\pi f$$

Thus

$$\omega = \sqrt{\frac{k}{m}} = 2\pi f \quad (1.6)$$

The frequency of oscillation depends on the mass and the stiffness of the spring.

$$f = \frac{1}{2\pi} \sqrt{\frac{k}{m}} \quad (1.7)$$

Let's see if this is reasonable. Imagine driving along in your student car (say, a 1972 Gremlin). You go over a bump, and the car oscillates. Your car is a mass, and your shock absorbers are springs. You have an oscillation. But suppose you load your car with everyone in your apartment². Now as you hit the bump the car oscillates at a different frequency, a lower frequency. That is what our

²If you are married, imagine taking two other couples with you in your car.


1.4. MATHEMATICAL REPRESENTATION OF SIMPLE HARMONIC MOTION 7

frequency equation tells us. Note also that if we changed to a different set of shocks, the k would change, and we would get a different frequency.

We still don't have a complete solution to our differential equation, because we don't know A and ϕ_o . From trigonometry, we recognize ϕ_o as the initial phase angle. We will call it the *phase constant* in this class. We will have to find this by knowing the initial conditions of the motion. We will do this in the paragraphs that follow.

A is the amplitude. We can find its value when the motion has reached its maximum displacement. Let's look at a specific case

$$\begin{aligned} A &= 5 \\ \phi_o &= 0 \\ \omega &= 2 \end{aligned}$$

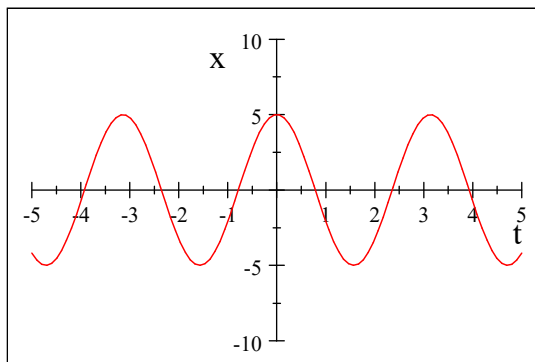

We can easily see that the amplitude A corresponds to the maximum displacement x_{\max} .

1.4.1 Other useful quantities we can identify

We know from trigonometry that a cosine function has a period T .

The period is related to the frequency

$$T = \frac{1}{f} = \frac{2\pi}{\omega} \quad (1.8)$$

We can write the period and frequency in terms of our mass and spring constant

$$T = 2\pi\sqrt{\frac{m}{k}} \quad (1.9)$$

$$f = \frac{1}{2\pi}\sqrt{\frac{k}{m}} \quad (1.10)$$

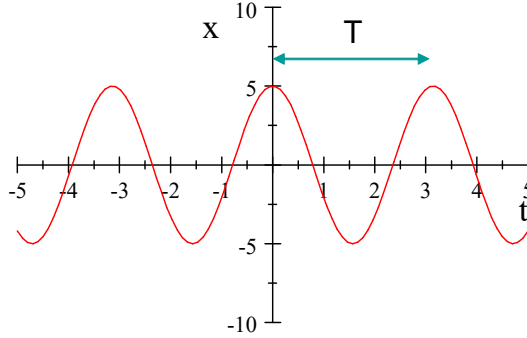


Figure 1.1:

1.4.2 Velocity and Acceleration

Since we know the derivatives of

$$x(t) = A \cos(\omega t + \phi_o) \quad (1.11)$$

we can identify the instantaneous velocity of the mass and its acceleration

$$v(t) = \frac{dx(t)}{dt} = -\omega A \sin(\omega t + \phi_o)$$

Recall that $A = x_{\max}$

$$v(t) = \frac{dx(t)}{dt} = -\omega x_{\max} \sin(\omega t + \phi_o) \quad (1.12)$$

We identify

$$v_{\max} = \omega x_{\max} = x_{\max} \sqrt{\frac{k}{m}} \quad (1.13)$$

Likewise for the acceleration

$$a(t) = \frac{dv(t)}{dt} \quad (1.14)$$

$$\begin{aligned} &= \frac{d}{dt} (-\omega x_{\max} \sin(\omega t + \phi_o)) \\ &= -\omega^2 x_{\max} \cos(\omega t + \phi_o) \end{aligned} \quad (1.15)$$


where we can identify

$$a_{\max} = \omega^2 x_{\max} = \frac{k}{m} x_{\max} \quad (1.16)$$


1.4. MATHEMATICAL REPRESENTATION OF SIMPLE HARMONIC MOTION⁹

1.4.3 Comparison of position, velocity, acceleration


Let's plot $x(t)$, $v(t)$, and $a(t)$ for a specific case

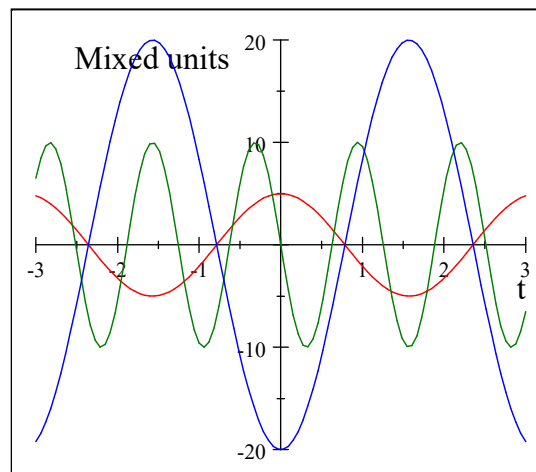

Red is the displacement, green is the velocity, and blue is the acceleration. Note that each has a different maximum amplitude. That is a bit confusing until we recognize that they each have different units. We have just plotted them on the same graph to make it easy to compare their shapes. Note that the peaks are not in the same places! We use a phrase to say the peaks happen at different times. We say they are *not in phase*.

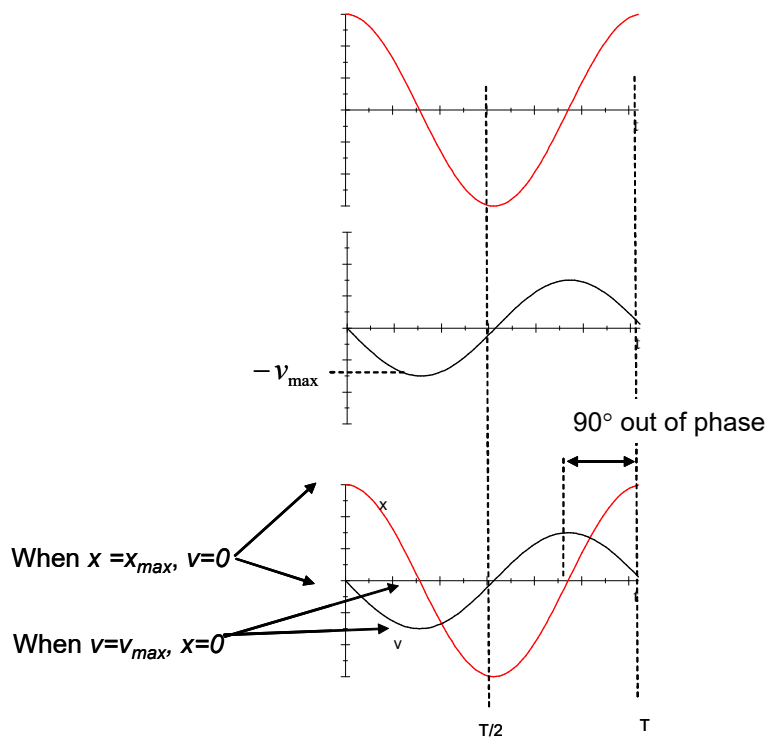

The acceleration is 90° out of phase from the velocity.

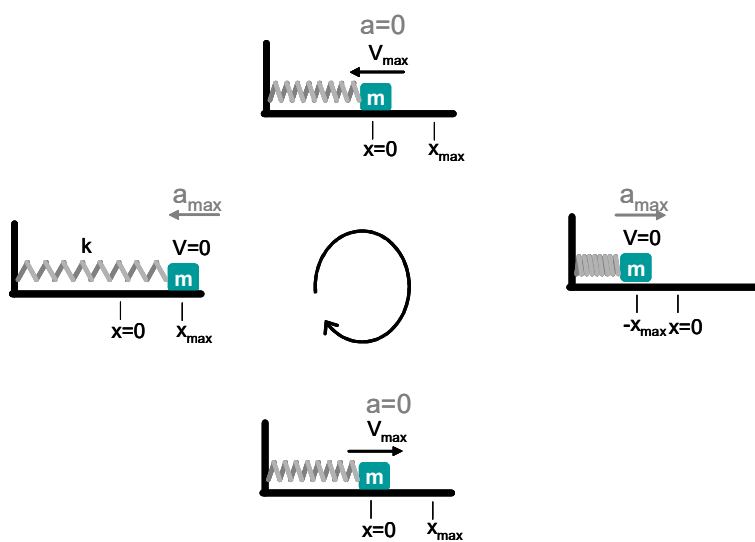

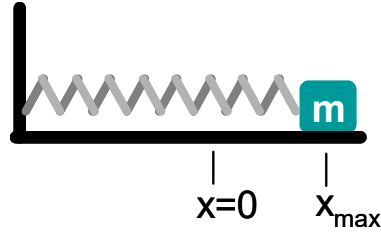


Figure 1.2:

1.5 An example of oscillation

We want to see how to find A , ω , and especially ϕ_o . These quantities will be important in our study of waves. So let's do a problem.

Let's take as our system a horizontal mass-spring system where the mass is on a frictionless surface.

Initial Conditions

Now let's find A and ϕ_o . To do this we need to know how we started the mass-spring motion. We call the information on how the system starts its motion the *initial conditions*.

Suppose we start the motion by pulling the mass to $x = x_{\max}$ and releasing it at $t = 0$. These are our initial conditions. Let's see if we can find the phase. Our initial conditions require

$$\begin{aligned} x(0) &= x_{\max} \\ v(0) &= 0 \end{aligned} \tag{1.17}$$

Using our formula for $x(t)$ and $v(t)$ we have

$$\begin{aligned} x(0) &= x_{\max} = x_{\max} \cos(0 + \phi_o) \\ v(0) &= 0 = -v_{\max} \sin(0 + \phi_o) \end{aligned} \tag{1.18}$$

From the first equation we get

$$1 = \cos(\phi_o)$$

which is true if

$$\phi_o = 0, 2\pi, 4\pi, \dots$$

from the second equation we have

$$0 = \sin \phi_o$$

which is true for

$$\phi_o = 0, \pi, 2\pi, \dots$$

If we choose $\phi_o = 0$, these conditions are met. Of course we could choose $\phi_o = 2\pi$, or $\phi_o = 4\pi$, but we will follow the rule to take the smallest value for ϕ_o that meets the initial conditions.

1.5.1 A second example

Using the same equipment, let's start with

$$\begin{aligned}x(0) &= 0 \\v(0) &= +v_i\end{aligned}\tag{1.19}$$

that is, the mass is moving, and we start watching just as it passes the equilibrium point.

$$\begin{aligned}x(0) &= 0 = x_{\max} \cos(0 + \phi_o) \\v(0) &= v_i = -v_{\max} \sin(0 + \phi_o)\end{aligned}\tag{1.20}$$

from

$$0 = x_{\max} \cos(\phi_o)$$

(first equation above) we see that³

$$\phi_o = \pm \frac{\pi}{2}$$

but we don't know the sign. Using our initial velocity condition

$$\begin{aligned}v_i &= -v_{\max} \sin\left(\pm \frac{\pi}{2}\right) \\v_i &= -\omega x_{\max} \sin\left(\pm \frac{\pi}{2}\right)\end{aligned}$$

We defined the initial velocity as positive, and we insist on having positive amplitudes, so x_{\max} is positive. Thus we need a minus sign from $\sin(\phi_o)$ to make v_i positive. This tells us to choose

$$\phi_o = -\frac{\pi}{2}$$

with a minus sign.

Our solutions are

$$\begin{aligned}x(t) &= \frac{v_i}{\omega} \cos\left(\omega t - \frac{\pi}{2}\right) \\v(t) &= v_i \sin\left(\omega t - \frac{\pi}{2}\right)\end{aligned}$$

Remark 3 *Generally to have a complete solution to a differential equation, you must find all the constants (like A and ϕ_o) based on the initial conditions.*

³Really there are more possibilities, but we are taking the smallest value for ϕ_o as we discussed above.

1.5.2 A third example

So far we have concentrated on finding ϕ_o . Let's do a more complete example where we find ϕ_o , A , and ω .

A particle moving along the x axis in simple harmonic motion starts from its equilibrium position, the origin, at $t = 0$ and moves to the right. The amplitude of its motion is 4.00 cm, and the frequency is 1.50 Hz.

a) show that the position of the particle is given by


$$x = (4.00 \text{ cm}) \sin(3.00\pi t)$$

determine

b) the maximum speed and the earliest time ($t > 0$) at which the particle has this speed,

c) the maximum acceleration and the earliest time ($t > 0$) at which the particle has this acceleration, and

d) the total distance traveled between $t = 0$ and $t = 1.00 \text{ s}$



Type of problem

We can recognize this as an oscillation problem. This leads us to a set of basic equations

Basic Equations

$$\begin{aligned} x(t) &= A \cos(\omega t + \phi_o) \\ v(t) &= -\omega x_{\max} \sin(\omega t + \phi_o) \\ a(t) &= -\omega^2 A \cos(\omega t + \phi_o) \end{aligned}$$

$$\omega = 2\pi f$$

$$v_m = \omega x_m$$

$$a_m = \omega^2 x_m$$

$$T = \frac{1}{f}$$

We should write down what we know and give a set of variables

Variables

t	time, initial time =0	$t_o = 0$
x	Position, Initial position =0	$x(0) = 0$
v		
a		
x_m	x amplitude	$x_m = 4.00 \text{ cm}$
v_m	v amplitude	
a_m	a amplitude	
ω	angular frequency	
ϕ_o	phase	
f	frequency	$f = 1.50 \text{ Hz}$

Now we are ready to start solving the problem. We do this with algebraic symbols first

Symbolic Solution**Part (a)**

We can start by recognizing that we can find ω because we know the frequency. We just use the basic equation.

$$\omega = 2\pi f$$

We also know the amplitude $A = x_{\max}$ which is given. Knowing that

$$x(0) = 0 = A \cos(0 + \phi_o)$$

we can guess that

$$\phi_o = \pm \frac{\pi}{2}$$

Using

$$v(0) = -\omega x_{\max} \sin\left(0 \pm \frac{\pi}{2}\right)$$

again and demanding that amplitudes be positive values, and noting that at $t = 0$ the velocity is positive from the initial conditions:

$$\phi_o = -\frac{\pi}{2}$$

We also note from trigonometry that

$$x(t) = x_{\max} \cos\left(2\pi ft - \frac{\pi}{2}\right)$$

which is a perfectly good answer. However, if we remember our trig, we could write this using

$$\cos\left(\theta - \frac{\pi}{2}\right) = \sin(\theta)$$

Then we have

$$\begin{aligned} x(t) &= x_{\max} \cos\left(2\pi ft - \frac{\pi}{2}\right) \\ &= x_{\max} \sin(2\pi ft) \end{aligned}$$

Part (b)

We have a basic equation for v_{\max}

$$\begin{aligned} v_m &= \omega x_{\max} \\ &= 2\pi f x_{\max} \end{aligned}$$

to find when this happens, take

$$v(t) = v_{\max} = -\omega x_{\max} \sin\left(2\pi ft - \frac{\pi}{2}\right)$$

and recognize that $\sin(\theta) = 1$ is at a maximum when $\theta = \pi/2$ so the entire argument of the sine function must be $\pi/2$ when we are at the maximum displacement, so

$$\frac{\pi}{2} = \left(2\pi ft - \frac{\pi}{2}\right)$$

or

$$\pi = 2\pi ft$$

then the time is

$$\frac{1}{2f} = t$$

Part (c)

Like with the velocity we must use a basic formula, this time

$$a(t) = -\omega^2 A \cos(\omega t + \phi_o)$$

but recognize that the maximum is achieved when $\cos(\omega t + \phi_o) = 1$ or when $\omega t + \phi_o = 0$

$$\begin{aligned} t &= \frac{\phi_o}{\omega} \\ &= \frac{-\frac{\pi}{2}}{2\pi f} \\ &= \frac{-1}{4f} \end{aligned}$$

The formula for a_{\max} is

$$\begin{aligned} a_{\max} &= -\omega^2 x_{\max} \\ &= -(2\pi f)^2 x_m \end{aligned}$$

Part (d)

We know the period is

$$T = \frac{1}{f}$$

We should find the number of periods in $t = 1.00$ s

$$N_{\text{periods}} = \frac{t}{T}$$

and find the distance traveled in one period, and multiply them together. In one period the distance traveled is

$$d = 4x_m$$

$$d_{tot} = d * \frac{t}{T} = 4fx_mt$$

Numerical Solutions

We found algebraic answers (or symbolic answers) to the parts of our problem above. We will always do this first. Then substitute in the numbers to find numeric answers.

Part (a)

$$\begin{aligned} x(t) &= x_{\max} \sin(2\pi ft) \\ &= (4.00 \text{ cm}) \sin(3.00\pi t) \end{aligned}$$

Part (b)

$$\begin{aligned} v_m &= 2\pi (1.50 \text{ Hz}) (4.00 \text{ cm}) \\ &\quad 0.377 \frac{\text{m}}{\text{s}} \end{aligned}$$

$$\frac{1}{2f} = t$$

$$\begin{aligned} \frac{1}{2(1.50 \text{ Hz})} &= t \\ &= 0.333 \text{ s} \end{aligned}$$

Part (c)

$$\begin{aligned} t &= \frac{-1}{4f} \\ &= -0.16667 \text{ s} \end{aligned}$$

$$\begin{aligned} a_{\max} &= (2\pi f)^2 x_m \\ &= (2\pi 1.5 \text{ Hz})^2 (4.00 \text{ cm}) \\ &= 3.5531 \frac{\text{m}}{\text{s}^2} \end{aligned}$$

Part (d)

$$\begin{aligned}
d_{tot} &= 4fx_mt \\
&= 4 \times 4.00 \text{ cm} \times 1.50 \text{ Hz} \times 1.00 \text{ s} \\
&= 0.24 \text{ m}
\end{aligned}$$

We should make sure the units check. We put in units along the way, so we can be confident that they do. But if you did not work along the way with units, check them now.

We should also make sure our answers are reasonable. If the amplitude came out to be a billion miles, you might guess something went wrong. Always look over your answers to make sure they seem reasonable.

1.6 Energy of the Simple Harmonic Oscillator

If there is motion, there is energy. We can find the energy in a harmonic oscillator. Let's start with kinetic energy. Recall that

$$K = \frac{1}{2}mv^2$$

for our Simple Harmonic Oscillator (SHO) we have

$$\begin{aligned}
K &= \frac{1}{2}m(-\omega x_{\max} \sin(\omega t + \phi_o))^2 \\
&= \frac{1}{2}m\omega^2 x_{\max}^2 \sin^2(\omega t + \phi_o) \\
&= \frac{1}{2}m \frac{k}{m} x_{\max}^2 \sin^2(\omega t + \phi_o) \\
&= \frac{1}{2}kx_{\max}^2 \sin^2(\omega t + \phi_o)
\end{aligned}$$

The potential energy due to a spring is given by (from your PH121 class or Statics/Dynamics)

$$U = \frac{1}{2}kx^2 \quad (1.21)$$

Again for our SHO we have


$$U = \frac{1}{2}kx_{\max}^2 \cos^2(\omega t + \phi_o) \quad (1.22)$$

The total energy is given by

$$\begin{aligned}
E &= K + U \\
&= \frac{1}{2}kx_{\max}^2 \sin^2(\omega t + \phi_o) + \frac{1}{2}kx_{\max}^2 \cos^2(\omega t + \phi_o) \\
&= \frac{1}{2}kx_{\max}^2 (\sin^2(\omega t + \phi_o) + \cos^2(\omega t + \phi_o)) \\
&= \frac{1}{2}kx_{\max}^2
\end{aligned} \quad (1.23)$$

This is an astounding result! The amount of energy at any given time is equal to the amount of energy we started with. We are not changing how much energy we have. We call such a value that does not change a *constant of motion*.

Remark 4 *The total mechanical energy of a SHO is a constant of motion*

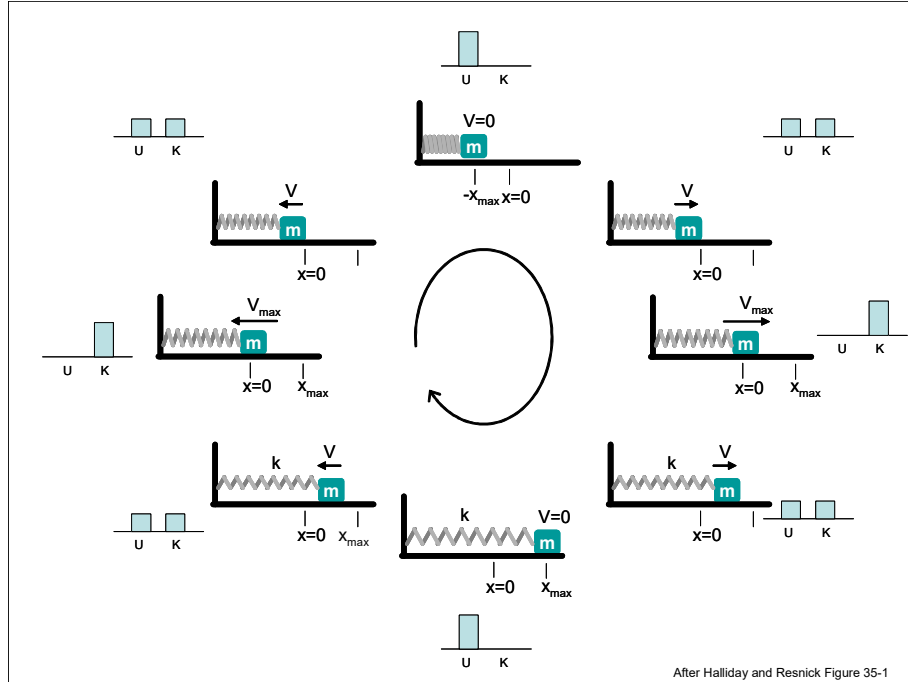

In the figure you can see that the kinetic and potential energies trade back and forth, but the total amount of energy does not change. Note that the kinetic and potential energy are out of phase with each other. If we plot them on the same scale (for the case $\phi_o = 0$) we have


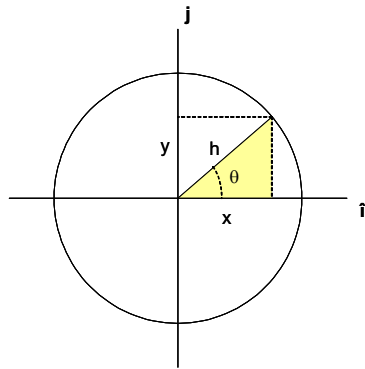


Figure 1.3:

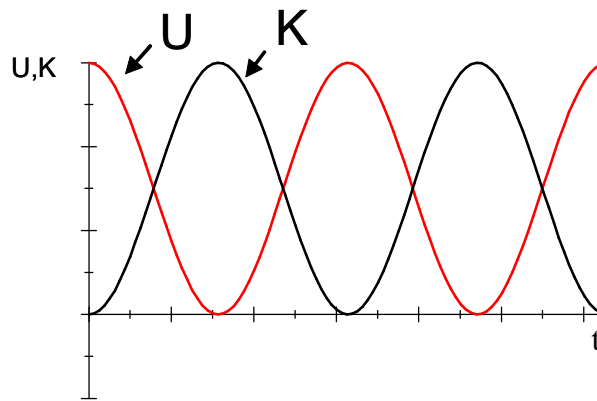

1.7 Circular Motion and SHM


That circular motion and SHM are related should not be a surprise once we found the solutions to the equations of motion were trig functions. Recall that the trig functions are defined on a unit circle

$$\tan \theta = \frac{x}{y} \quad (1.24)$$

$$\cos \theta = \frac{x}{h} \quad (1.25)$$

$$\sin \theta = \frac{y}{h} \quad (1.26)$$

Let's relate this to our equations of motion.

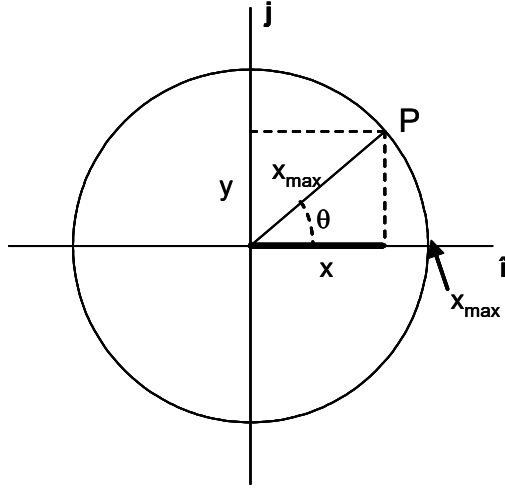

Look at the projection x of the point P on the x axis. Lets follow this projection as P travels around the circle. We find it ranges from $-x_{\max}$ to x_{\max} . If we watch closely we find its velocity is zero at the extreme points and is a maximum in the middle. This projection is given as the cos of the vector from the origin to P . This model, indeed fits our SHO solution.

Now lets define a projection of P onto the y axis. Again we have SHM, but this time the projection is a sin function. Because


$$\cos\left(\theta - \frac{\pi}{2}\right) = \sin(\theta) \quad (1.27)$$

we can see that this is just a SHO that is 90° out of phase.

Remark 5 We see that uniform circular motion can be thought of as the combination of two SHOs, with a phase difference of 90° .

The angular velocity is given by

$$\omega = \frac{v}{r} \quad (1.28)$$



A particle traveling on the x -axis in SHM will travel from x_{\max} to $-x_{\max}$ and from $-x_{\max}$ to x_{\max} (one complete period, T) while the particle traveling with P makes one complete revolution. Thus, the angular frequency ω of the SHO and the angular velocity of the particle at P are the same. (Now we know why we used the same symbol). The magnitude of the velocity is then

$$v = \omega r = \omega x_{\max} \quad (1.29)$$


and the projection of this velocity onto the x -axis is

$$v_x = -\omega x_{\max} \sin(\omega t + \phi_o) \quad (1.30)$$

Just what we expected!

The angular acceleration of a particle at P is given by


$$\frac{v^2}{r} = \frac{v^2}{x_{\max}} = \frac{\omega^2 x_{\max}^2}{x_{\max}} = \omega^2 x_{\max} \quad (1.31)$$



The direction of the acceleration is inward toward the origin. If we project this onto the x -axis we have

$$a_x = -\omega^2 x_{\max} \cos(\omega t + \phi_o) \quad (1.32)$$

1.8 The Pendulum

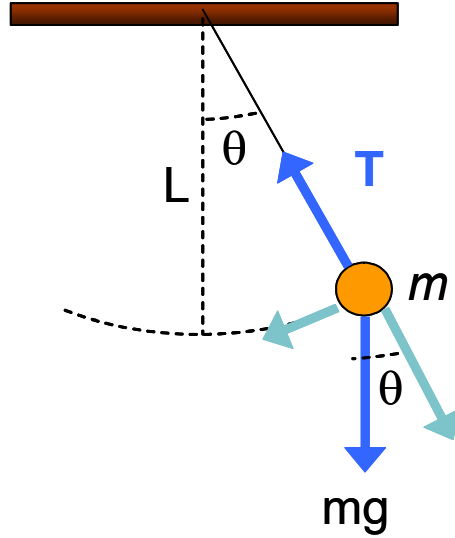

A simple pendulum is a mass on a string. The mass is called a “bob.”

A simple pendulum exhibits periodic motion, but not exactly simple harmonic motion.

The forces on the bob, m , are \mathbf{F}_g , \mathbf{T} the tension on the string. The tangential component of F_g is always directed toward $\theta = 0$. This is a restoring force!

Let's call the path the bob takes s . The path, s , is along an arc, then from Jr. High geometry⁴, we can use the arc-length formula to describe s

$$s = L\theta \quad (10.01a)$$

and we can write an equation for the restoring force that brings the bob back to its equilibrium position as

$$\begin{aligned} F_t &= -mg \sin \theta \\ &= m \frac{d^2 s}{dt^2} \\ &= mL \frac{d^2 \theta}{dt^2} \end{aligned} \quad (1.33)$$

or

$$\frac{d^2 \theta}{dt^2} = -\frac{g}{L} \sin \theta$$

This is a harder differential equation to solve. But suppose we are building a grandfather clock with our pendulum, and we won't let the pendulum swing very far. Then we can take θ as a very small angle, then

$$\sin(\theta) \approx \theta \quad (1.34)$$

⁴From Jr. High, but if you are like me you have forgotten it until now.

In this approximation

$$\frac{d^2\theta}{dt^2} = -\frac{g}{L}\theta$$

and we have a differential equation we recognize! Compare to

$$\frac{d^2x}{dt^2} = -\omega^2x \quad (1.35)$$

if

$$\omega^2 = \frac{g}{L} \quad (1.36)$$

we have all the same solutions for s that we found for x . Since ω changed, the frequency and period will now be in terms of g and L .

$$T = \frac{2\pi}{\omega} = 2\pi\sqrt{\frac{L}{g}} \quad (1.37)$$

Remark 6 *the period and frequency for a pendulum with small angular displacements depend only on L and g !*

1.9 Damped Oscillations

Suppose we add in another force

$$\mathbf{F}_d = -b\mathbf{v} \quad (1.38)$$

This force is proportional to the velocity. This is typical of viscous fluids. So this is what we would get if we place our mass-spring system (or pendulum) in air or some other fluid. We call b the damping coefficient. Now our net force is

$$\Sigma F = -kx - bv_x = ma$$

We can write the acceleration and velocity as derivatives of the position

$$-kx - b\frac{dx}{dt} = m\frac{d^2x}{dt^2}$$

This is another differential equation. It is harder to guess its solution

$$x(t) = Ae^{-\frac{b}{2m}t} \cos(\omega t + \phi_o) \quad (1.39)$$

but now our angular frequency, ω , is more complicated

$$\omega = \sqrt{\frac{k}{m} - \left(\frac{b}{2m}\right)^2} \quad (1.40)$$


We have three cases:

- Case 7**
1. the retarding force is small: ($bv_{\max} < kA$) The system oscillates, but the amplitude is smaller as as time goes on. We call this “under-damped”
 2. the retarding force is large: ($bv_{\max} > kA$) The system does not oscillate. we call this “overdamped.” We can also say that $\frac{b}{2m} > \omega_o$ (after we define ω_o below)
 3. The system is critically damped (see below)

For the following values,

$$\begin{aligned} A &= 5 \text{ cm} \\ b &= 0.005 \frac{\text{kg}}{\text{s}} \\ k &= .5 \frac{\text{N}}{\text{m}} \\ m &= .5 \text{ kg} \end{aligned}$$

we have a graph that looks like this

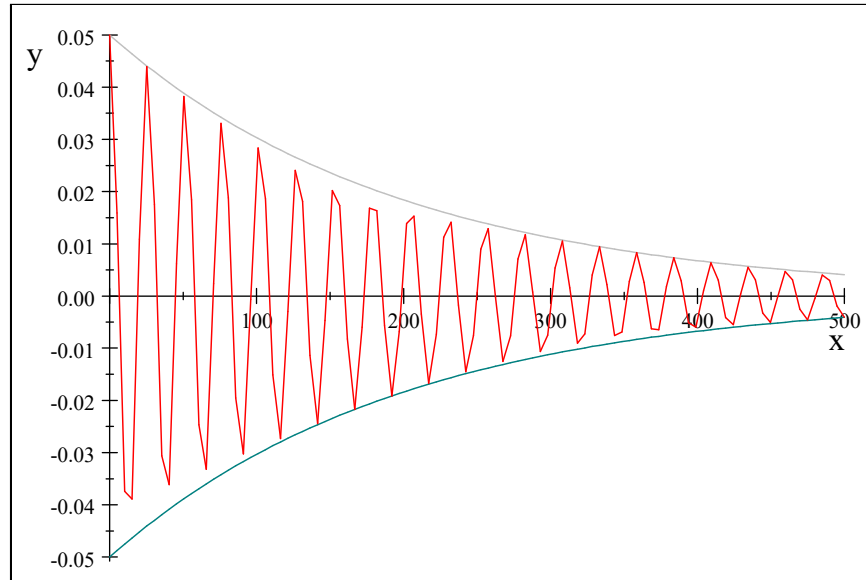


The gray lines are


$$\pm Ae^{-\frac{b}{2m}t} \quad (1.41)$$

They describe how the amplitude changes. We call this the *envelope* of the curve.

$$\begin{aligned} A &= 5 \text{ cm} \\ b &= 0.005 \frac{\text{kg}}{\text{s}} \\ k &= .5 \frac{\text{N}}{\text{m}} \\ m &= .5 \text{ kg} \end{aligned}$$

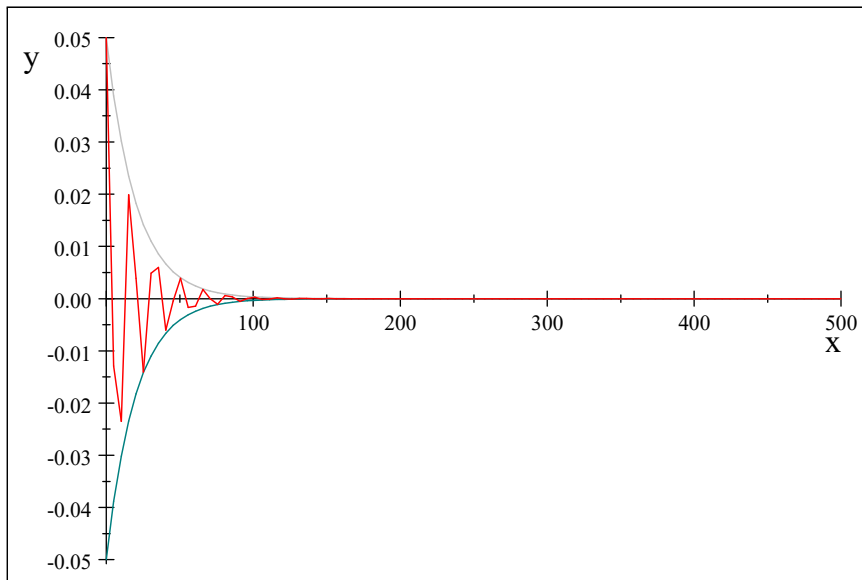

$$\begin{aligned} A &= 5 \text{ cm} \\ b &= 0.5 \frac{\text{kg}}{\text{s}} \\ k &= .5 \frac{\text{N}}{\text{m}} \\ m &= .5 \text{ kg} \end{aligned}$$

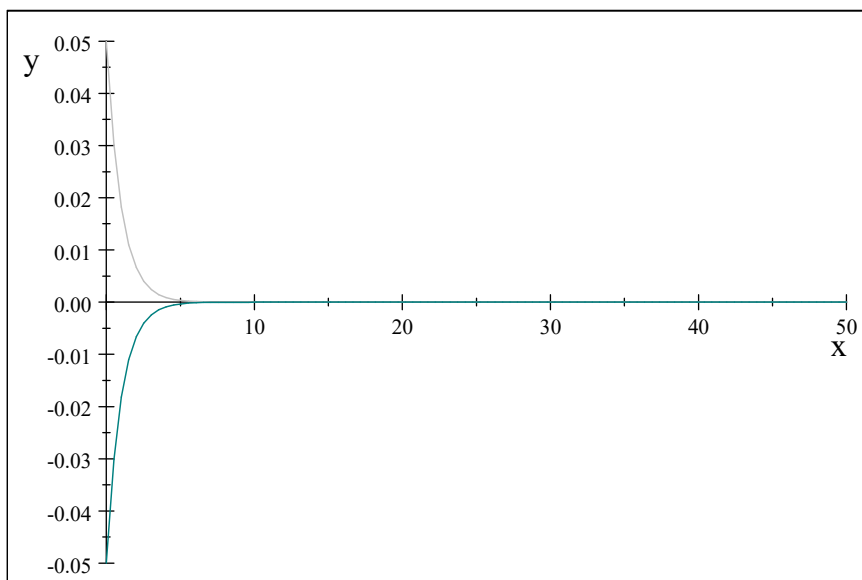

What happened?

When the damping force gets bigger, the oscillation eventually stops. Only the exponential decay is observed. This happens when

$$\frac{b}{2m} = \sqrt{\frac{k}{m}} \quad (1.42)$$

then

$$\omega = \sqrt{\frac{k}{m} - \left(\frac{b}{2m}\right)^2} = 0 \quad (1.43)$$

We call this situation we call critically damped. We are just on the edge of oscillation. We define

$$\omega_o = \sqrt{\frac{k}{m}} \quad (1.44)$$

as the *natural frequency* of the system. Then the value of b that gives us critically damped behavior is

$$b_c = 2m\omega_o \quad (1.45)$$

Remark 8 When $\frac{b}{2\pi} \geq \omega_o$ the solution in equation (1.39) is not valid! If you are a mechanical engineer you will find out more about this situation in your advanced mechanics classes.

1.10 Driven Oscillations and Resonance

We found in the last section that if we added a force like

$$\mathbf{F}_d = -b\mathbf{v} \quad (1.46)$$

our oscillation died out. Suppose we want to keep it going? Let's apply a periodic force like

$$F(t) = F_o \sin(\omega_f t)$$

where ω_f is the angular frequency of this new driving force and where F_o is a constant.

$$\Sigma F = F_o \sin(\omega_f t) - kx - bv_x = ma$$

When this system starts out, the solutions is very messy. It is so messy that we will not give it in this class! But after a while, a steady-state is reached. In this state, the energy added by our driving force $F_o \sin(\omega_f t)$ is equal to the energy lost by the drag force, and we have

$$x(t) = A \cos(\omega_f t + \phi_o) \quad (1.47)$$

our old friend! BUT NOW

$$A = \frac{\frac{F_o}{m}}{\sqrt{\left(\omega_f^2 - \omega_o^2\right)^2 + \left(\frac{b\omega_f}{m}\right)^2}} \quad (1.48)$$

and where

$$\omega_o = \sqrt{\frac{k}{m}} \quad (1.49)$$

as before. It is more convenient to drop the f subscripts


$$x(t) = A \cos(\omega t + \phi_o) \quad (1.50)$$

$$A = \frac{\frac{F_o}{m}}{\sqrt{(\omega^2 - \omega_o^2)^2 + \left(\frac{b\omega}{m}\right)^2}} \quad (1.51)$$

so now our solution looks more like our original SHM solution (except for the wild formula for A).

Lets look at A for some values of ω . I will pick some nice numbers for the other values.

$$\begin{aligned} F_o &= 2 \text{ N} \\ b &= 0.5 \frac{\text{kg}}{\text{s}} \\ k &= 0.5 \frac{\text{N}}{\text{m}} \\ m &= 0.5 \text{ kg} \end{aligned}$$

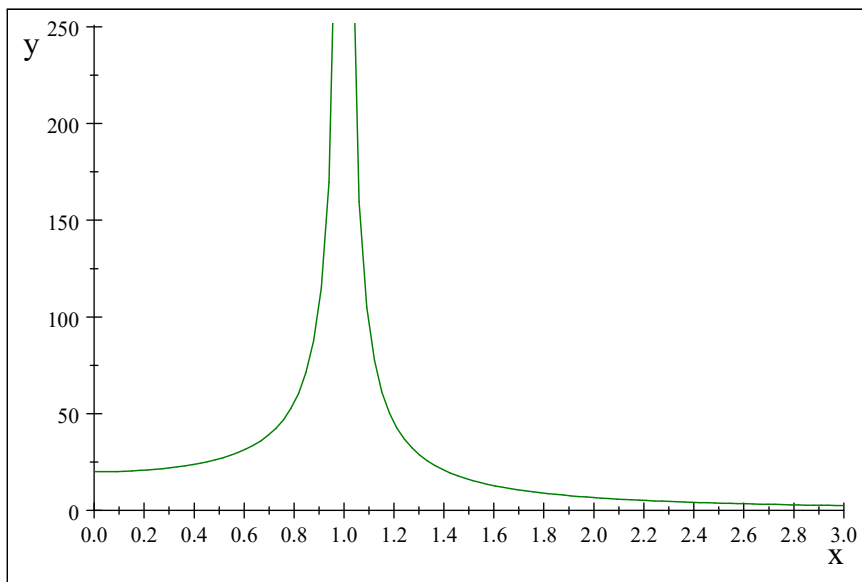

now let's calculate ω

$$\begin{aligned} \omega_o &= \sqrt{\frac{0.5 \frac{\text{N}}{\text{m}}}{0.5 \text{ kg}}} \\ &= \frac{1.0}{\text{s}} \end{aligned}$$

Notice that right at ω our solution gets very big. This is called *resonance*. To see why this happens, think of the velocity

$$\frac{dx(t)}{dt} = -\omega A \sin(\omega t + \phi_o) \quad (1.52)$$

note that our driving force is


$$F(t) = F_o \sin(\omega t) \quad (1.53)$$

The rate at which work is done (power) is

$$\mathcal{P} = \frac{\mathbf{F} \cdot \Delta \mathbf{x}}{\Delta t} = \mathbf{F} \cdot \mathbf{v} \quad (1.54)$$

if F and v are in phase, the power will be at a maximum!


We can plot A for several values of b

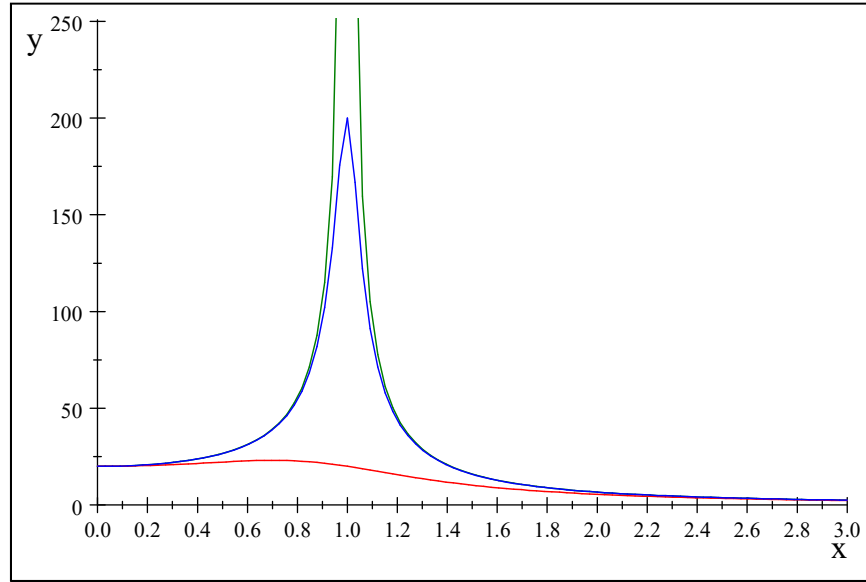

Green: $b=0.005\text{kg/s}$; Blue: $b=0.05\text{kg/s}$; Red $b=0.01\text{ kg/s}$

As $b \rightarrow 0$ we see that our resonance peak gets larger. In real systems b can never be zero, but sometimes it can get small. As $b \rightarrow \text{large}$, the resonance dies down and our A gets small.

An example of this is well known to mechanical engineers. The next picture is of the Tacoma Narrows Bridge. As a steady wind blew across the bridge it formed turbulent wind gusts.

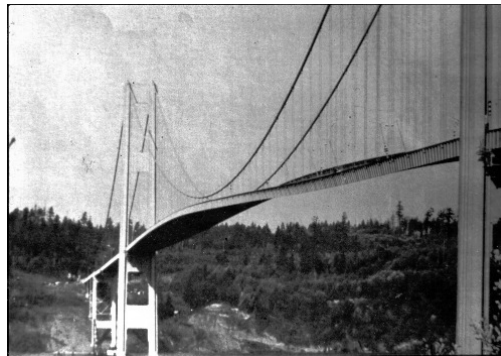

Tacoma Narrows Bridge (Image in the Public Domain)

The wind gusts formed a periodic driving force that allowed a driving harmonic oscillation to form. Since the bridge was resonant with the gust frequency, the amplitude grew until the bridge materials broke.

