


C5双频天线

5G黑色长条PCB/1.13线L=120MM(1代端子)

The logo graphic consists of two overlapping triangles. The left triangle is light purple and the right triangle is light blue. They are positioned such that they form a larger, irregular shape pointing upwards.


osptek[®]

1. 产品图片:

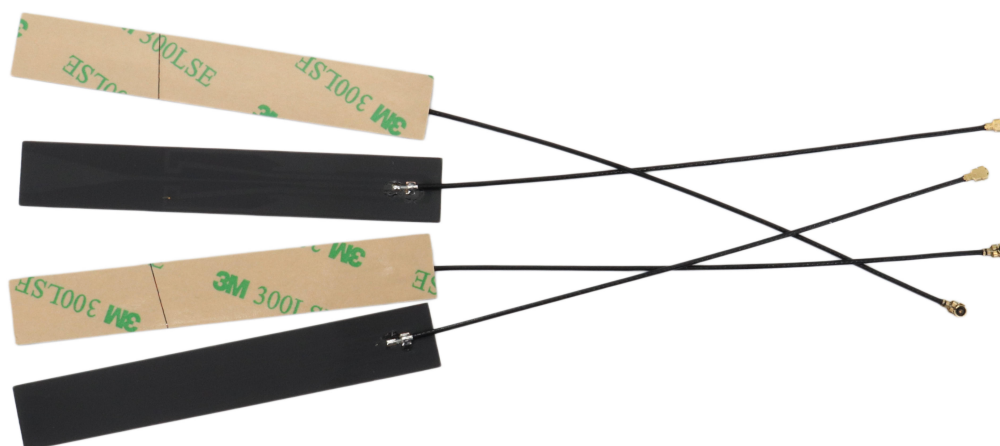

2. 电气性能测试报告:

VSWR:

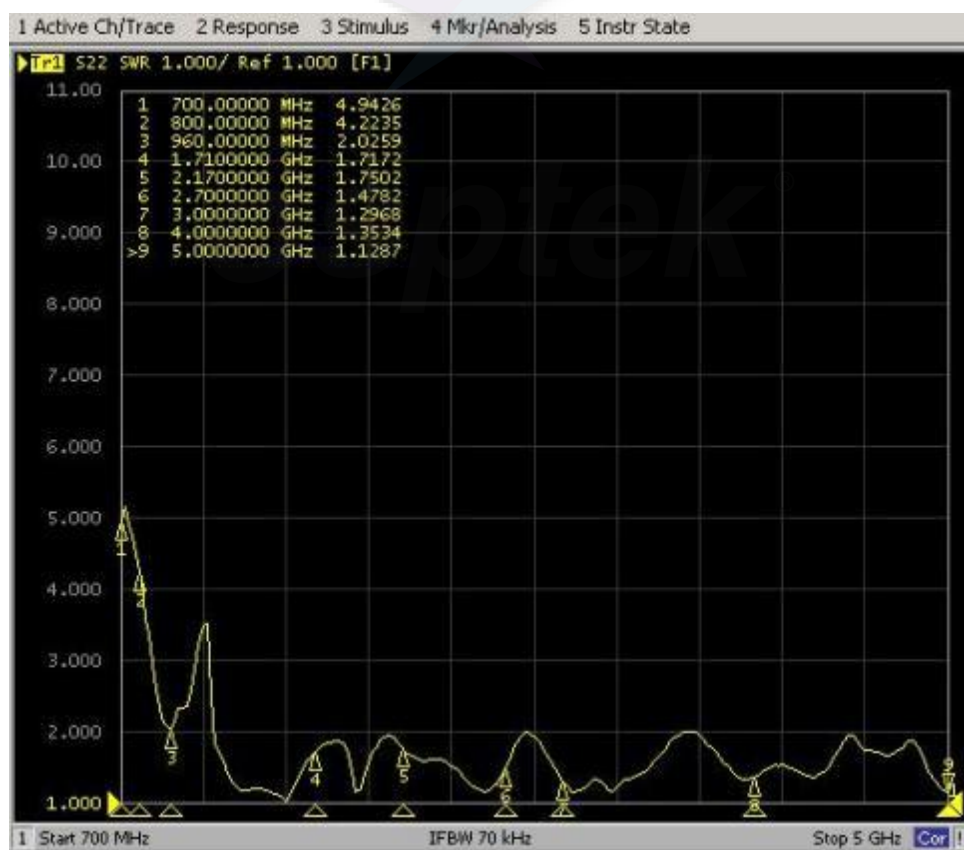

3. 产品性能参数:

电性能指标Electrical Specifications	
频率范围Frequency Range (MHz)	700-960/ 1710-2700/3000-5000
输入阻抗Input Impedence (Ω)	50
电压驻波比V.S.W.R	≤ 2.0 (未匹配设备, 仅供参考)
增益Gain (dBi)	3.0 ± 0.5 (未匹配设备, 仅供参考)
极化形式Polarization Type	垂直Vertical
最大功率Maximum power(W)	10W
垂直面波瓣角度Vertical lobe Angle (E)	45~60°
水平面波瓣角度Water plane lobe Angle (H)	360°
机械指标Mechanical Specifications	
天线材质Material	FPC
连接器型号Connect Type	IPEX(1代)
天线尺寸Size	20*99.5* IMM
工作温度Operating Temp	-20 ~ +65 oC
储存温度Storage Temp	-30 ~ +75oC