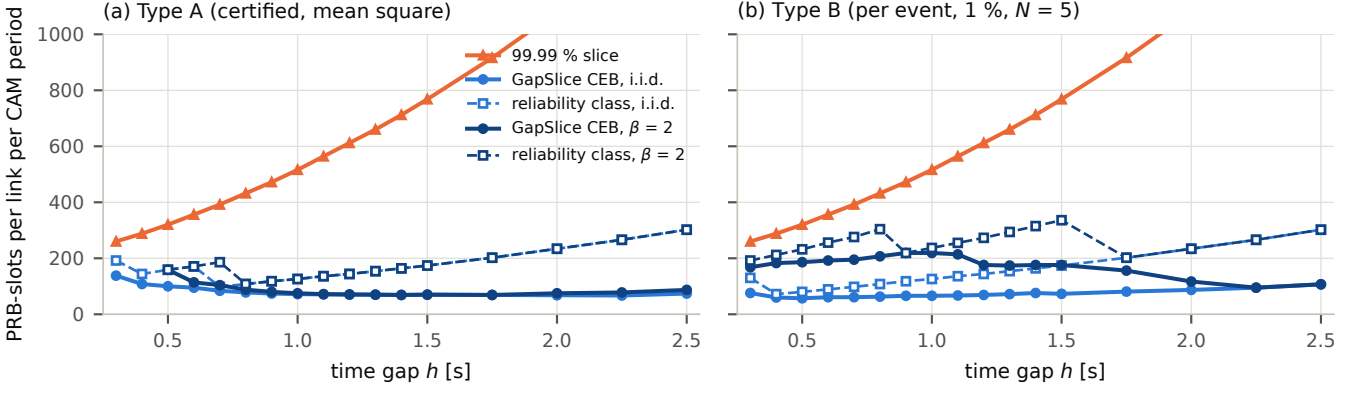
(a) Type A (certified, mean square)
(b) Type B (per event, 1 %, $N = 5$)
PRB-slots per link per CAM period
1000
800
600
400
200
0
0.5
1.0
1.5
2.0
2.5
time gap h [s]
99.99 % slice
GapSlice CEB, i.i.d.
reliability class, i.i.d.
GapSlice CEB, $\beta = 2$
reliability class, $\beta = 2$