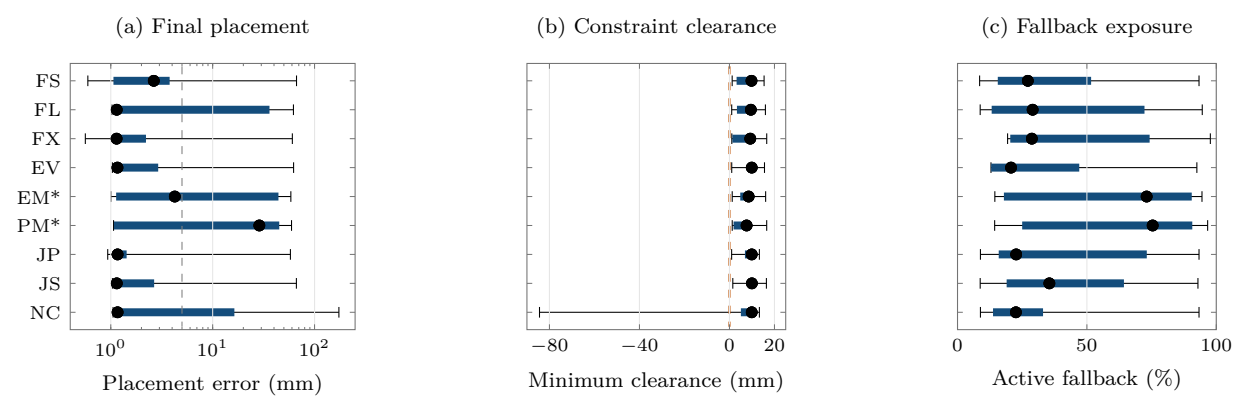
(a) Final placement
(b) Constraint clearance
(c) Fallback exposure
FS
FL
FX
EV
EM*
PM*
JP
JS
NC
$10^0$
$10^1$
$10^2$
Placement error (mm)
−80
−40
0
20
Minimum clearance (mm)
0
50
100
Active fallback (%)