

BRANT RADIANT HEATERS LTD.

Lux Pro PSP-722 Thermostat



Range

40°F to 95°F

Differential

Adjustable

Contact Action

Opens on rise

Electrical Rating

30V max (24 VAC nominal)

Millivolt Control

1.5 AMP max per terminal

2.0 AMP terminal sum

Dimensions

Height: 4.313"

Width: 5.875"

Depth: 1.188"

Operation

Two-stage


Low voltage

Millivolt


Additional Features

7-day individual programming.

TYPICAL WIRING DIAGRAMS

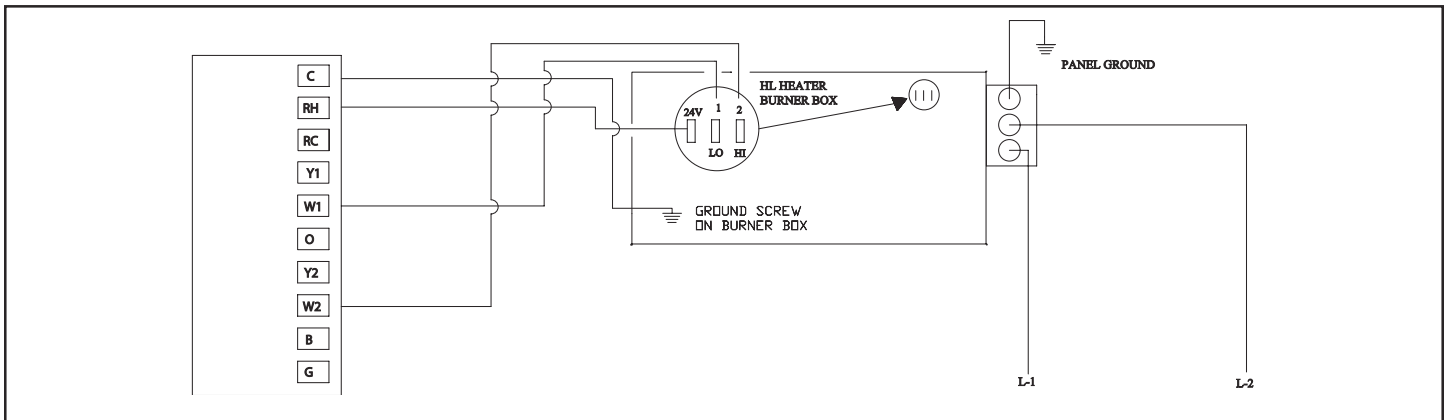

Two-stage heaters with a PSP-722 thermostat. Single heater, single thermostat. No HLRB (relay board) is installed.

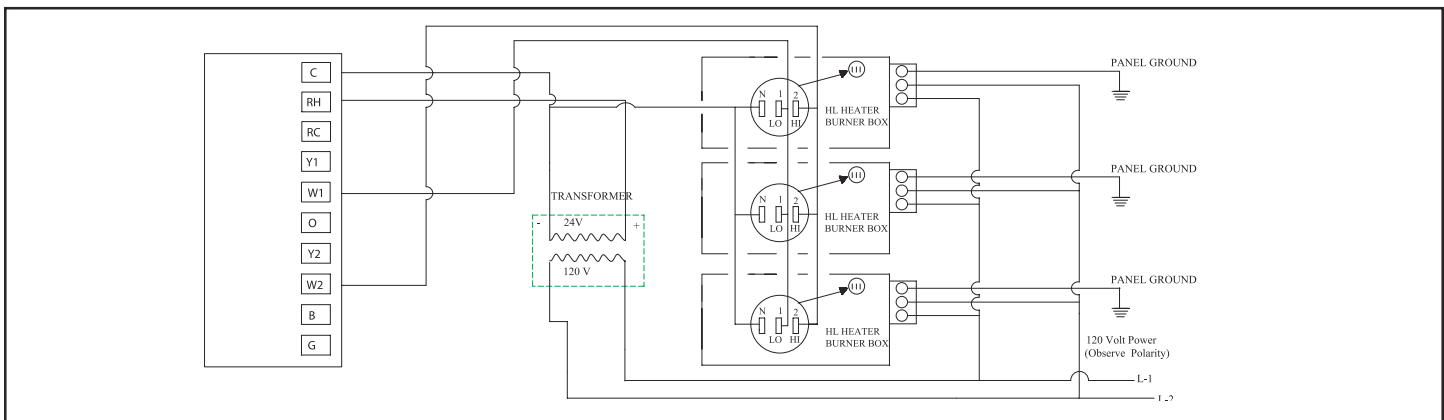

Two-stage heaters with a PSP-722 thermostat. Single heater, single thermostat. HLRB (relay boards) are installed.