


SERIES

BAH SERIES

MEDIUM WAVE ELECTRIC INFRARED SPACE HEATERS

Electric infrared heaters are the cleanest method of heating, taking nothing from the air and adding nothing to the air. They are ideal for applications where gas is not available or impractical. Electric infrared heaters are the answer to applications where gas and/or ventilation is not available.

MEDIUM WAVE



TYPICAL APPLICATIONS

- Loading Docks
- Sporting Facilities
- Shipping/Receiving
- Valet Areas
- Spot Heating
- Vestibules/Entrance Ways

SPECIFIC QUARTZ-RAY ADVANTAGES

Savings- A custom-tailored Quartz-Ray installation can economically meet your heating needs for new construction or retrofitted for existing facilities.

Control- Provides heat when you want it; where you want it.

Ease of Installation- Special features built into every Quartz-Ray electric heater allows ease of installation in new or existing applications.

Comfort- Quartz-Ray electric heaters quietly focus energy efficient infrared rays on the floor area, maintaining the required comfort levels for people while reducing the stratification effects.

Condensation- Potential corrosion problems with stored steel products is eliminated by keeping the temperature above the dew point.

Noise- No fans, blowers or moving parts reduces overall noise levels in the space.

PRODUCT FEATURES

- Voltage inputs of 120, 208, 240, 480, and 575
- Six models available ranging from 0.5 kW to 4.0 kW
- Pollution free no venting required
- Produces virtually instant heat
- 90-Day limited warranty.
- CSA Design Certified.

BRANT RADIANT HEATERS LTD.

34 Scott Ave. Paris, ON N3L 3R1

Phone: 1-519-442-7823 Toll Free: 1-800-387-4778 1-519-442-7321 Fax:

E-mail: sales@brantradiant.com Website: www.brantradiant.com

VISIT OUR WEBSITE FOR:

- Product Specs Parts Support
- · C.A.D. Library
- Design Guidelines
- Dealer Locator
- Theory of Infrared
- Applications
- and More!

BAH SERIES


RE-VERBER-RAY


SPECIFICATIONS

available bah models											
Models	Volts	kW	Watts	Amp	Phase	Equivalent BTU's	Overall Length	Width	Height	Weight	Cert.
BAH-18-A-05*	120	0.5	500	4.2	Single	1,700	18 in.	6.75 in.	6.75 in.	8 lbs.	CSA
BAH-25-A-10*	120	1.0	1,000	8.3	Single	3,400	25 in.	6.75 in.	6.75 in.	10 lbs.	CSA
BAH-25-B-10*	208	1.0	1,000	4.8	Single	3,400	25 in.	6.75 in.	6.75 in.	10 lbs.	CSA
BAH-25-C-10*	240	1.0	1,000	4.2	Single	3,400	25 in.	6.75 in.	6.75 in.	10 lbs.	CSA
BAH-35-A-17*	120	1.7	1,750	14.0	Single	5,900	35 in.	6.75 in.	6.75 in.	13 lbs.	CSA
BAH-35-B-17*	208	1.7	1,750	8.3	Single	5,900	35 in.	6.75 in.	6.75 in.	13 lbs.	CSA
BAH-35-C-17*	240	1.7	1,750	7.0	Single	5,900	35 in.	6.75 in.	6.75 in.	13 lbs.	CSA
BAH-35-G-17	480	1.7	1,750	3.6	Single	5,900	35 in.	6.75 in.	6.75 in.	13 lbs.	CSA
BAH-45-B-25	208	2.5	2,500	12.0	Single	8,500	45 in.	6.75 in.	6.75 in.	16 lbs.	CSA
BAH-45-C-25	240	2.5	2,500	10.0	Single	8,500	45 in.	6.75 in.	6.75 in.	16 lbs.	CSA
BAH-45-G-25	480	2.5	2,500	5.2	Single	8,500	45 in.	6.75 in.	6.75 in.	16 lbs.	CSA
BAH-60-B-30 †	208	3.0	3,000	14.0	Single	10,200	60 in.	6.75 in.	6.75 in.	20 lbs.	CSA
BAH-60-C-30 [†]	240	3.0	3,000	12.0	Single	10,200	60 in.	6.75 in.	6.75 in.	20 lbs.	CSA
BAH-60-G-30 †	480	3.0	3,000	6.3	Single	10,200	60 in.	6.75 in.	6.75 in	20 lbs.	CSA
BAH-60-C-40 [†]	240	4.0	4,000	16.5	Single	13,500	60 in.	6.75 in.	6.75 in.	20 lbs.	CSA
BAH-60-D-40 †	575	4.0	4,000	7.0	Single	13,500	60 in.	6.75 in.	6.75 in.	20 lbs.	CSA
BAH-60-G-40 [†]	480	4.0	4,000	8.3	Single	13,500	60 in.	6.75 in.	6.75 in.	20 lbs.	CSA

^{*} Certified for Brooder use. † Truckline only.

DIMENSIONS & TECHNICAL INFORMATION

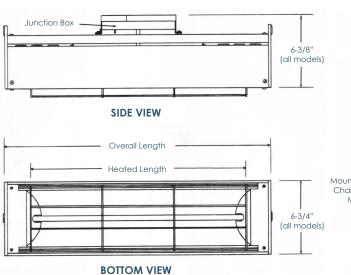




Bracket For Optional Heater Positions 13-5/8" (all models)



Clearance to Combustibles



Clearances to combustibles must be maintained. Clearances are measured from the radiant surface and/or heater bottom to the nearest combustible surface. It is essential that the position and the angle of the installation avoids any possibility of curtains, draperies or other flammable material coming in contact with the heater.

♠ WARNING

To Prevent Serious Injury or Death:

This heater is **NOT** for home or recreational use. **DO NOT USE** in the home, mobile home, RV's, campers, tents, etc.





CEILING OR WALL SURFACE MOUNTING

DISTRIBUTED BY:



