

SW SERIES SHORT WAVE

SUBMITTAL DATA ELECTRIC INFRARED SPACE HEATERS

SUBMITTED BY: _____

DATE: _____

JOB TITLE: _____

CONTRACTOR: _____

ADDRESS: _____

PHONE #: _____

CITY: _____

ADDRESS: _____

PROVINCE: _____ POSTAL CODE: _____

CITY: _____

ENGINEER: _____

PROVINCE: _____ POSTAL CODE: _____

LOCAL REPRESENTATIVE: _____

PHONE: _____

NOTES: _____

Qty.	Model Number*		Tag	Lamp Qty.	Lamp Type* (select one)	Volts	Watts	BTU'S	Amps	Overall Unit Length	Ship Weight (Lbs.)
	Black Powder Coat Housing	Stainless Steel Housing									
	SW-24B1-A16#	SW-24S1-A16#		1	Clear or Ruby	120	1,600	5,459	13.3	24 in.	11.2
	SW-24B1-B16#	SW-24S1-B16#			Clear or Ruby	208			7.69		
	SW-24B1-C16#	SW-24S1-C16#			Clear or Ruby	240			6.67		
	SW-24B1-G16#	SW-24S1-G16#			Clear or Ruby	480			3.33		
	SW-33B1-B25#	SW-33S1-B25#			Clear or Ruby	208	2,500	8,530	12.02	33 in.	13.8
	SW-33B1-C25#	SW-33S1-C25#			Clear or Ruby	240			10.42		
	SW-33B1-G25#	SW-33S1-G25#			Clear or Ruby	480			5.21		
	SW-46B1-G36#	SW-46S1-G36#			Clear or Ruby	480	3,650	12,454	7.60	46 in.	17.5
	SW-46B1-H38#	SW-46S1-H38#			Clear or Ruby	575			6.61		
	SW-24B2-B16#	SW-24S2-B16#		2	Clear or Ruby	208	3,200	10,919	15.38	24 in.	15.7
	SW-24B2-C16#	SW-24S2-C16#			Clear or Ruby	240			13.33		
	SW-24B2-G16#	SW-24S2-G16#			Clear or Ruby	480			6.67		
	SW-33B2-B25#	SW-33S2-B25#			Clear or Ruby	208	5,000	17,061	24.04	33 in.	21.0
	SW-33B2-C25#	SW-33S2-C25#			Clear or Ruby	240			20.83		
	SW-33B2-G25#	SW-33S2-G25#			Clear or Ruby	480			10.42		
	SW-33B2-G36#	SW-33S2-G36#			Clear or Ruby	480			15.21		
	SW-46B2-H38#	SW-46S2-H38#			Clear or Ruby	575	7,600	25,932	13.22	46 in.	24.5
	SW-24B3-B16#	SW-24S3-B16#		3	Clear or Ruby	208	4,800	16,378	23.08	24 in.	19.8
	SW-24B3-C16#	SW-24S3-C16#			Clear or Ruby	240			20.00		
	SW-24B3-G16#	SW-24S3-G16#			Clear or Ruby	480			10.00		
	SW-33B3-G25#	SW-33S3-G25#			Clear or Ruby	480	7,500	24,909	15.63	33 in.	24.5
	SW-46B3-G36#	SW-46S3-G36#			Clear or Ruby	480	10,950	37,636	22.81	46 in.	31.5
	SW-46B3-H38#	SW-46S3-H38#			Clear or Ruby	575	11,400	38,898	19.83		

* # Specify Lamp Type - [W] Clear or [R] Red.

White [W] = Standard 'White/Clear' Quartz Lamps.

Red [R] = Glare Reducing 'Red' Quartz Lamps.



BRANT RADIANT HEATERS LIMITED

VISIT OUR WEBSITE FOR:



34 Scott Ave.
Paris, ON N3L 3R1

Phone: (519) 442-7823
Toll Free: (800) 387-4778
Fax: (519) 442-7321
Email: sales@brantradiant.com
Website: www.brantradiant.com

- Product Specs
- Parts Support
- Dealer Locator
- Applications
- C.A.D. Library
- Design Guidelines
- Theory of Infrared
- and More!

LSSW-1M-2/11_r2.7/12(DRP)

SW SPECIFICATIONS

HEATER CONSTRUCTION (Choose)

- Black powder-coat aluminized steel housing.
- 304 brushed stainless steel housing for added durability and corrosion resistance.

LAMP ELEMENTS

- Coiled tungsten filament housed within a sealed quartz tubing.
- Porcelain end caps w/ 6" wire pigtail leads.
- Instantaneous heat-up & cool-down.
- Clear quartz.
- Optional glare reduction ruby quartz.

CONTROLS

- Field supplied.

ELECTRICAL SUPPLY

- Voltages from 120 to 575 VAC.
- Single-phase or three-phase.
- 1,600 to 3,800W per element.

MOUNTING

- 0° to 45° adjustable brackets.

REFLECTORS

- Gold coloured, anodized aluminum reflectors reduces visible light glare
- Wide, symmetric design.

APPROVALS

- ETL Listed for indoor and outdoor applications.
- Commercial/Industrial Approval.

- CSA 22.2 #46 - M1988.
- UL 2021, 1997.

LIMITED WARRANTY


- All components - 1 year.
- Please contact the factory for further information on the terms and conditions.

WWW.REVERBERRY.COM

- Product literature.
- Aftermarket parts support.
- Representative locator.
- C.A.D. design library.
- Troubleshooting guide.

FIELD DATA

DIMENSIONAL INFORMATION

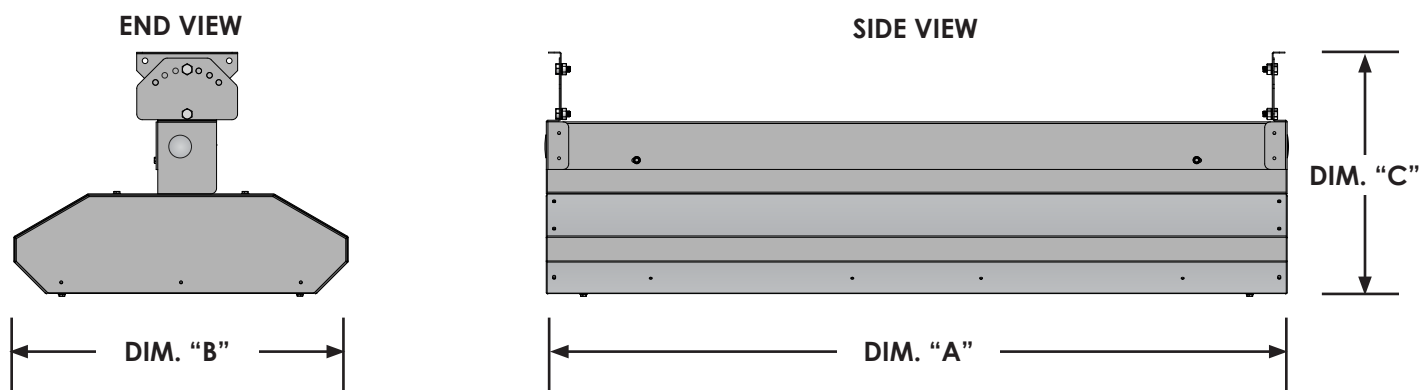

MODEL NUMBER	LAMP QTY.	DIM A INCHES (MM)	DIM B INCHES (MM)	DIM C INCHES (MM)
SW-24	1	24.00 (610)	9.25 (235)	10.75 (273)
	2		15.00 (381)	
	3		20.75 (527)	
SW-33	1	33.00 (838)	9.25 (235)	10.75 (273)
	2		15.00 (381)	
	3		20.75 (527)	
SW-46	1	46.00 (1169)	9.25 (235)	10.75 (273)
	2		15.00 (381)	
	3		20.75 (527)	


OPTIONAL ACCESSORIES

QTY.	PART NO.	DESCRIPTION	NOTES


CLEARANCES TO COMBUSTIBLES (IN.)

MODEL NO.	LAMP QTY.	VOLTS	WATTS	BTU/H	MOUNTING		SIDE		END	TOP	BELOW
					ANGLE	FRONT	BEHIND*				
SW-24	1	120	1,600	5,459	0°	24	24	24	6	40	
		208			1°-45°	40	24	24	10	40	
		240									
		480									
	2	208	3,200	10,919	0°	24	24	24	6	56	
		240			1°-45°	56	24	24	10	56	
		480									
	3	208	4,800	16,378	0°	24	24	24	6	72	
		240			1°-45°	74	24	24	10	72	
		480									
SW-33	1	208	2,500	8,530	0°	24	24	24	6	46	
		240			1°-45°	46	24	24	10	46	
		480									
	2	208	5,000	17,065	0°	24	24	24	6	72	
		240			1°-45°	72	24	24	10	72	
		480									
	3	480	7,500	24,909	0°	24	24	24	6	84	
					1°-45°	84	24	24	10	84	
SW-46	1	480	3,650	12,454	0°	24	24	24	6	62	
					1°-45°	62	24	24	10	62	
		575	3,800	12,978	0°	24	24	24	6	62	
					1°-45°	62	24	24	10	62	
	2	480	7,300	24,909	0°	24	24	24	6	84	
					1°-45°	84	24	24	10	84	
		575	7,600	25,955	0°	24	24	24	6	84	
					1°-45°	84	24	24	10	84	
	3	480	10,950	37,636	0°	24	24	24	6	96	
					1°-45°	96	24	24	10	96	
		575	11,400	38,933	0°	24	24	24	6	96	
					1°-45°	96	24	24	10	96	


*The BEHIND clearance must maintain a minimum of 36 inches from another heater.

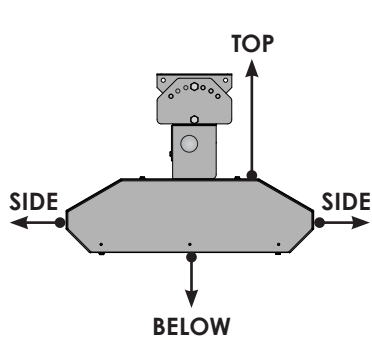

END VIEW 0°

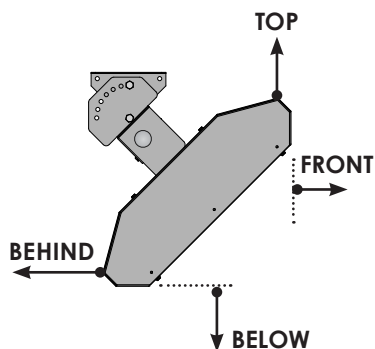

END VIEW 1° to 45°

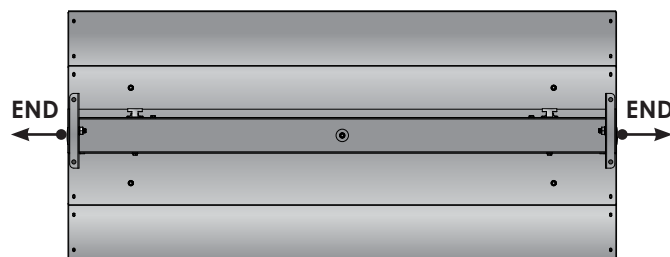

TOP VIEW

WRITTEN SPECIFICATIONS

HEATER PARAMETER/SPECIFICATIONS

- Short wave electric infrared heaters shall be furnished and installed in accordance with governing codes and as shown per drawing(s) provided. Short wave electric heaters shall be **RE-VERBER-RAY SW SERIES**, as manufactured by Brant Radiant Heaters Limited, Paris, ON N3L 3R1.
- Short wave infrared heaters shall be Designed Certified by ETL and bear the ETL Seal of Certification for the United States and Canada.
- The supplier shall provide manufacturer's published warranty covering all components utilized in the heater control assembly for a period of one (1) year.
- The supplier shall furnish the owner/contractor with _____ copies of the engineering specification form, showing physical dimensions, installation detail, recommendations, wiring diagrams, and spare parts list.
- An Installation, Operation, Maintenance and Parts Manual (IOPM) shall be supplied with each heater.
- The manufacturer shall have a minimum of 50 years of manufacturing experience producing infrared heaters.
- Short wave infrared heaters must be ETL Listed to operate at the designated rating of _____kW/h.
- Electric short wave infrared space heaters shall be supplied and installed in accordance with the manufacturers certified installation instructions and governing codes, as shown per building drawing(s) _____. Heaters shall be SW Series, model _____, input ranges in Watts.

SW SERIES HEATER CONTROLS

- Field supply applicable controls.
- Heaters shall operate in given voltages:

<u>Volt</u>	<u>Phase</u>	<u>Hertz</u>
120V	1ph	50/60
208V	1ph or 3ph	50/60
240V	1ph or 3ph	50/60
480V	1ph or 3ph	50/60
575V	1ph or 3ph	50/60

- Heaters shall operate in given wattage inputs of 1,600 to 11,400.

SHORT WAVE INFRARED HEATER CONSTRUCTION

- The heater housing shall be constructed of either black powder-coated aluminized steel or 304 brushed stainless steel.
- The heater reflector shall be constructed of highly polished aluminum with a multi-faceted design.
- The emitter tubing shall be argon filled evacuated blown quartz with high temperature ceramic end caps.
- The quartz tubing shall be opaque in color allowing maximum radiant heat transfer, or have a ruby red sleeve for reduced glare while still allowing maximum radiant heat transfer.
- The optional protective grill be bright zinc coated.
- Optional factory supplied mounting brackets shall accommodate for sidewall or ceiling mounting.