
COMPACT COMFORT

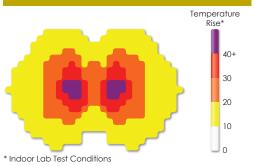

SERIES AVD OAVS

AVD SERIES

AGRICULTURAL, QUAD TUBE, TWO-STAGE LOW-INTENSITY HEATER


The AVD Series Patent Pending two-stage infrared heater is designed for poultry and non-corrosive agricultural environments. Its unique construction offers an innovative heating solution designed for agricultural applications. Its construction incorporates the modular benefits of high-intensity infrared with the application versatility of low-intensity infrared. The enhanced two-stage feature of the AVD Series provides superior performance and is ideal for applications seeking even heat intensity. CSA Design Certified for indoor or outdoor applications, the AVD Series is a right choice for poultry, dairy, arena, barns, shops and much more.







PRODUCT FEATURES

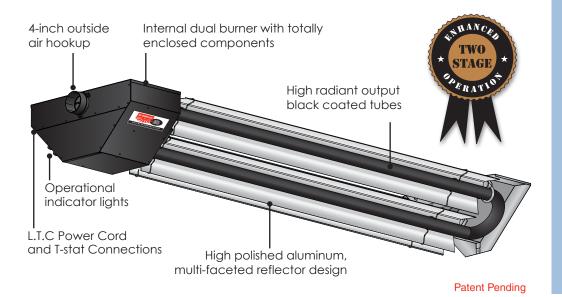

TYPICAL APPLICATIONS

- Chicken barns
- Pig barns
- Dairy barns
- Turkey barns
- Spot or Total Barn Heat
- Wash down stables

- Compact, aesthetically pleasing construction.
- Easy to install with minimal assembly required.
- Proven fuel savings.
- Multiple construction features including: dual spark ignition, highly emissive heat exchangers, highly polished aluminum reflectors, operational indicator lights and more.
- Designed and packaged for ease in transportation.
- CSA Design Certified for both indoor and outdoor use and to Agricultural and Commercial/Industrial Standards.

BRANT RADIANT HEATERS LTD.

34 Scott Ave. Paris, ON N3L 3R1

Phone: (519) 442-7823 Toll Free: 1-800-387-4778 Fax: (519) 442-7321

sales@brantradiant.com Email: Website: www.brantradiant.com

VISIT OUR WEBSITE FOR:

- Product Specs
- Parts Support
- Design Guidelines
- Dealer Locator
- Theory of Infrared

• C.A.D. Library

- Applications
- and More!

AVD SERIES

SPECIFICATIONS



PRODUCT SPECIFICATIONS

Input Range:	60,000 to 80,000 BTU/h					
Lengths:	107" O.A.L					
Gas Type:	Natural or Propane					
Burner Control Box:	Coated Enameled Steel					
Radiant Emitter Tubes:	Coated Aluminized Steel					
Certification:	CSA Design Certified					
Limited Warranty:	1-3-5 (Components-Tubes-Burners)					
Outdoor Approval:	Optional OD-KIT Add-On					
24V Controls:	4000-01V External transformer required for controlling multiple units with a single control.					
Operational Indicator Lights:	Standard					

ELECTRICAL

- 120V/1 Ph,/60 Hz.
- Starting amps 1.5.
- Running amps 1.1.
- 24V burner input w/ 24V field select output switch.

INTERNAL CONTROLS

- Two-stage gas valve.
- 3-try dual spark ignition.
- Safety pressure switch.
- Self-diagnostic w/ LED.
- Pre & post purge controls.

TUBE CONSTRUCTION

- 2.25"O.D.,16 ga. aluminized steel construction.
- All tubes coated with high temperature, corrosion resistant black coating, .95 emissivity.

APPROVALS

- Indoor/Outdoor.
- Commercial/Brooder.

REFLECTORS (4)

- Highly polished aluminum.
- Multi-facet design.
- Pre-set angle for optimal output.

VENTING

- 4" single vent.
- Sidewall or roof venting.

COMBUSTION AIR

• Preset 4 in. combustion air inlet collar.

GAS CONNECTION

• 1/2 in. x 30 in. Type 1 hose.

GAS PRESSURES

- Manifold: 3.5" NAT or 10.0" LP • Min. Inlet: 5.0" NAT or 11.0" LP
- Max. Inlet: 14.0" NAT or 14.0" LP


KIT CONTENTS

- 4" vent adapter fitting.
- 81" x 4" spiral vent pipe.
- 30" Type 1 hose.

AVAILABLE AVD SERIES MODELS

						RECOMMENDED	CLEARANCE TO COMBUSTIBLES**				
MODEL NUMBER	GAS TYPE	BTU/H HIGH FIRE	BTU/H LOW FIRE	OVERALL LENGTH	WEIGHT (LBS.)	MOUNTING HEIGHTS*	TOP	SIDES	BELOW	BACK	END
AVD-60N	Natural	60,000	40,000	107"	103	8' to 12'	10	36	40	6	12
AVD-60P	Propane	60,000	40,000			8' to 12'	10	36	40	6	12
AVD-80N	Natural	80,000	50,000			10' to 14'	10	36	40	6	12
AVD-80P	Propane	80,000	50,000			10' to 14'	10	36	40	6	12

- * Recommended mounting heights are provided as a guideline. Actual conditions, such as outdoor or spot heating, may dictate variations from this data.
- ** Clearances published in AVD Series manual and on warning label supersede data shown on this brochure.

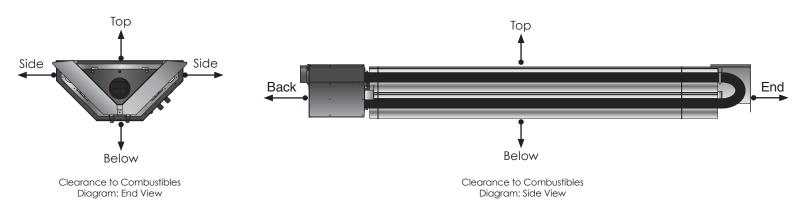

DISTRIBUTED BY:

NOT FOR RESIDENTIAL USE!





