



- 1) To ensure safety, it is very important that the emergency stop button is pushed in before we begin.

Emergency stop popped out




- 2) Align the indent on the back of the head to the indent on the yoke and slide it in.




\* Make sure not to force anything \*


- 3) When the head is slid in, the blue lights will immediately start flashing and once it is placed into the correct position, the flickering lights will slow down.

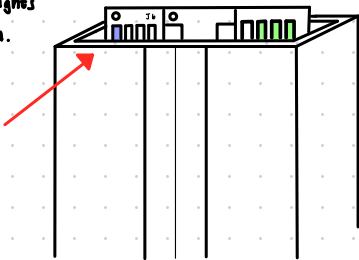


- 4) The thumb screw on the back of the yoke should be screwed in clock-wise about finger tight to ensure secure placement.



- 5) Under "heads 1-5", the corresponding slot will turn from gray to color.

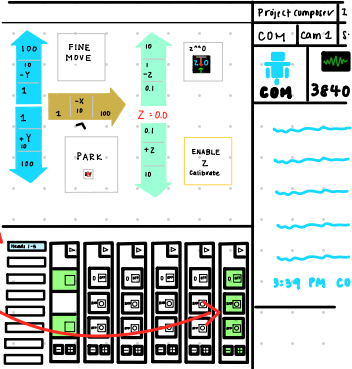


- 6) Using the right arrow button, click until the "head info model" screen pops up and choose the head model using the dropdown function.

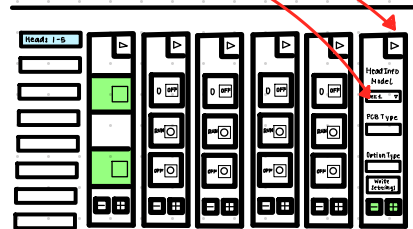

Copy	Ctrl + C
Paste	Ctrl + V
Load Settings	Ctrl + O
Save Settings	Ctrl + S
Load Settings From Project	
Flash Head Settings	

- 7) Right-click on the background of the slot and Flash Head Settings.

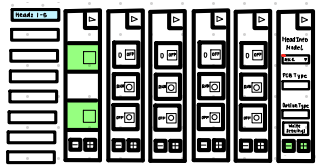

All Done !!

