


1 THE PROBLEM & THE SOLUTION


FleetResolve: From Triage to Resolution

More devices. More issues. More complexity — without proportionally more triage.

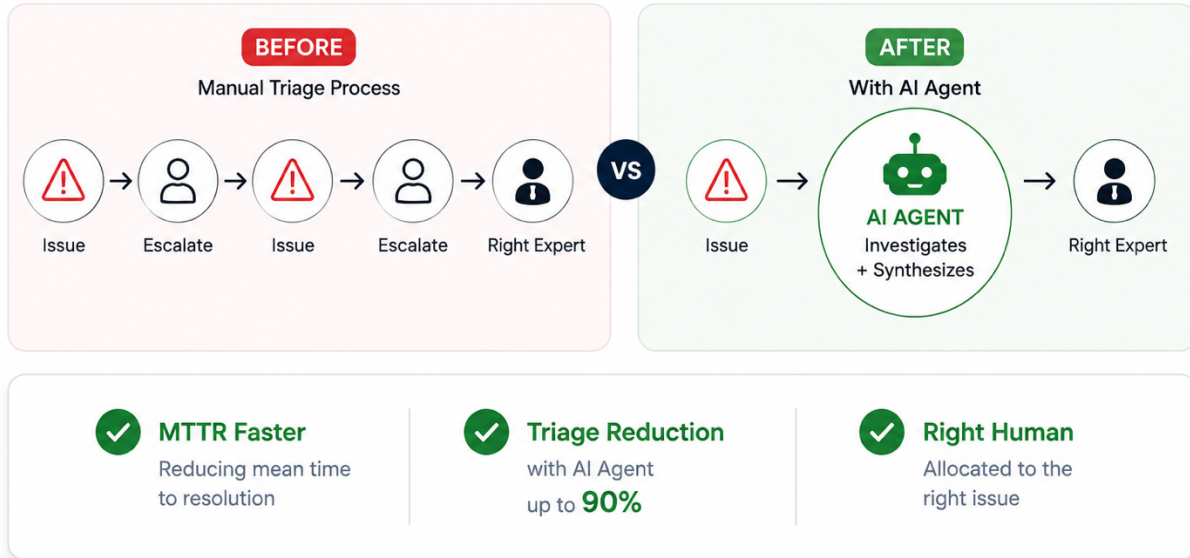

2 THE NOTEBOOK WORKFLOW

From Fleet Complexity to Human Resolution

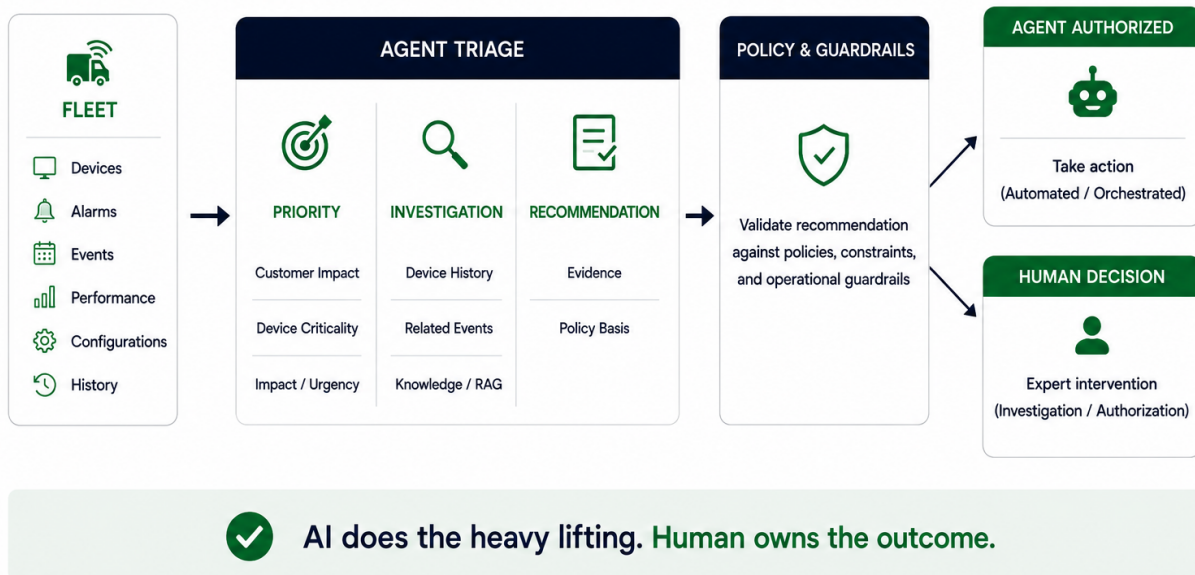

From Fleet Overview to Operator's Queue

1. Fleet Overview

See the fleet. Identify what needs investigation.

FleetResolve

Demo Tenant

Fleet Overview

Maya's Queue

Last updated: 2 min ago

Total Devices

2M

↑ 12% vs yesterday

Active Alerts

1,568

↑ 6% vs yesterday

Critical Investigations

32

↑ 14% vs yesterday

MTTR (24h)

2.4 hrs

↓ 18% vs yesterday

Fleet Alerts

AL-9472

Critical

Network latency spike - Site SF-03

2 min ago

AL-9451

Investigating

Device offline - Distribution Center

5 min ago

AL-9450

Critical

High CPU utilization - Edge Device E-21

1 min ago

AL-9443

Warning

Packet loss increased - Site LA-01

13 min ago

AL-9432

Critical

Memory usage high - Device E-17

1 min ago

AL-9472

Critical

Network latency spike

Site SF-03

Impact: High

Device Type: Router

OS: v17.6

Owner: Network Team

Summary: Latency is 3x higher than baseline on interface TenGig0/1. Flapping detected.

View details

Recent Signals: Latency spike detected (2 min ago), Interface TenGig0/1 latency is 320ms (baseline 105ms), Interface flapping detected (4 min ago), TenGig0/1 is flapping between up/down, Packet loss increased (6 min ago), Packet loss 12% (baseline < 1%)

View all signals

2. Operator's Queue

Agent-investigated issues arrive with evidence and next steps.

FleetResolve

Demo Tenant

Fleet Overview

Operator's Queue

Auto refresh

Queue & Filters

My Queue: 3

All Queues: 12

Filters: Severity: All, Status: All

Issues in My Queue

AV-7832

Critical

Network latency spike - Site SF-03

2 min ago

AV-7811

High

Device offline - DC-02

15 min ago

AL-9443

Warning

Packet loss increased - Site LA-01

18 min ago

Network latency spike - Site SF-03

Assigned to you • 2 min ago

Agent Summary: Latency on interface TenGig0/1 is 3x higher than baseline (320ms vs 105ms). Interface is flapping, causing intermittent connectivity. No recent config changes detected. Issue isolated to the circuit between SF-03 and Core-RTR-1.

Evidence (8): Latency trend chart, Interface flapping logs, Packet loss statistics, Configuration comparison, Topology map, Baseline performance metrics

Recommended Next Step: Reset interface TenGig0/1 during maintenance window and monitor for stability.

Take Action, Escalate

Activity: 2 min ago: Issue created, 2 min ago: Assigned to you by FleetResolve AI Agent