



Powering Connections,
Securing Solutions



CABLE GLAND

Material: Adopting Polyamide (PA6), PA6 FR & PPCP for the plastic parts, and interior and exterior seal is TPE /PVC or Rubber Neoprene/NBR

Working temperature: -40°C to 90°C in static state, instantaneous heat-resisting up to 100°C , -20°C to 70°C in dynamic state, instantaneous heat-resisting up to 90°C

Characteristics: Superior Grip & Locking Mechanism,IP68 Waterproof & Dustproof,Innovative Collar & Step Washer Design,Enhanced Structural Strength & Easy & Secure Installation.

Cable Gland PG Thread

Thread Size	Wrench size MM	Cable Entry "A" in MM	Dim. "B" MM	Dim. "C" MM	Dim. "D" MM	Dim. "E" MM
PG - 7	18.00	2.50 - 5.50	14.90	5.20	12.30	8.20
PG - 7	18.00	2.50 - 5.50	14.90	5.20	12.30	15.00
PG - 9	22.00	4.00 - 8.00	15.80	5.50	15.20	8.20
PG - 9	22.00	4.00 - 8.00	15.80	5.50	15.20	12.00
PG - 9	22.00	4.00 - 8.00	15.80	5.50	15.20	15.00
PG - 11	24.00	7.50 - 10.00	16.80	5.90	18.40	9.00
PG - 11	24.00	7.50 - 10.00	16.80	5.90	18.40	15.00
PG - 13.5	26.00	8.50 - 12.50	18.00	6.00	20.50	9.00
PG - 16	30.00	9.00 - 13.50	19.90	5.50	22.20	10.00
PG - 19	30.00	9.00 - 15.00	19.90	5.90	24.00	10.00
PG - 21	36.00	12.00 - 18.00	22.00	5.70	28.00	10.00
PG - 21	36.00	12.00 - 18.00	22.00	5.70	28.00	14.00
PG - 25	36.00	13.50 - 20.00	20.50	6.50	29.80	11.00
PG - 29	46.00	17.50 - 25.00	26.00	7.00	36.90	12.20
PG - 36	57.00	25.00 - 32.00	29.50	7.60	46.80	14.00
PG - 48	70.00	32.00 - 44.00	32.00	7.50	59.00	14.00

Cable Gland Metric Thread

M12 * 1.5	18.00	2.50 - 5.50	15.00	5.50	11.80	8.00
* M12 * 1.5	18.00	4.00 - 8.00	15.50	5.50	11.80	8.00
M16 * 1.5	22.00	4.00 - 8.00	15.50	5.50	15.80	8.00
* M16 * 1.5	22.00	6.00 - 12.00	18.00	5.50	15.80	8.00
M20 * 1.5	26.00	6.00 - 12.00	18.00	6.00	19.70	9.20
M25 * 1.5	32.00	14.00 - 18.00	22.00	6.20	24.70	10.20
M32 * 1.5	39.00	14.00 - 21.00	20.00	6.80	31.80	11.00
M40 * 1.5	52.00	23.00 - 32.00	29.50	7.50	39.90	14.20
M50 * 1.5	60.00	30.00 - 38.00	30.50	7.50	49.80	14.30
M63 * 1.5	74.00	34.00 - 44.00	29.00	8.00	62.00	14.20

* Bigger entry Cable glands

Colours :- Black Light grey other colours available upon request.



\$ BOWI (MOET. BYHSQ) . BYN VN (SQXJU BEVBOFE EFTHO

Material: Adopting Polyamide (PA6), PA6 FR & PPCP for the plastic parts, and interior and exterior seal is TPE or PVC .

Working temperature: -40 °C to 90°C in static state, instantaneous heat-resisting up to 100°C , -20°C to 70°C in dynamic state, instantaneous heat-resisting up to 90°C

Characteristics: Superior Grip & Locking Mechanism, IP68 Waterproof & Dustproof, Innovative Collar & Step Washer Design, Enhanced Structural Strength & Easy & Secure Installation.

Cable Gland PG Thread

Thread Size	Wrench size MM	Cable Entry "A" in MM	Dim. "B" MM	Dim. "C" MM	Dim. "D" MM	Dim. "E" MM
PG - 7	17.00	3.00 - 6.00	13.40	5.70	12.40	10.70
PG - 7	17.00	3.00 - 6.00	13.40	5.70	12.40	15.30
PG - 9	22.00	4.00 - 8.00	17.30	5.70	15.00	10.70
PG - 9	22.00	4.00 - 8.00	17.30	5.70	15.00	15.00
PG - 11	24.00	7.00 - 10.50	19.30	6.00	18.40	11.20
PG - 13.5	27.00	7.50 - 12.50	20.00	6.20	20.20	11.00
PG - 16	30.00	8.00 - 14.00	22.00	6.50	22.40	12.20
PG - 19	30.00	8.50 - 14.00	22.00	6.50	23.80	12.20
PG - 21	35.00	13.50 - 18.50	25.50	7.20	28.00	12.50
PG - 29	45.00	17.00 - 24.50	27.50	8.30	36.80	12.00
PG - 36	58.00	21.00 - 30.00	30.00	7.50	47.00	15.00
PG - 48	70.00	38.00 - 45.00	39.20	8.10	59.00	15.70

Cable Gland Metric Thread

M12*1.5	17.00	3.00 - 6.00	13.40	5.80	11.80	10.50
* M12*1.5	17.00	4.00 - 8.00	17.30	5.80	11.80	9.10
M16*1.5	22.00	4.00 - 8.00	17.30	5.80	15.80	10.50
* M16*1.5	22.00	7.50 - 10.50	19.10	5.80	15.80	10.20
M25*1.50	32	7.00 - 17.00	20.00	6.20	24.90	8.00

* Bigger entry Cable glands

Colours :- Black Light grey other colours available upon request.


Conduit Glands

- Colours:
- Black
 - Customized

Material:
Polyamide (PA6)





Thread	AD (mm)	TL (mm)	ID (mm)	OD (mm)
PG - 9	13	10.00	11.00	14.80
PG - 11	15.8	12.50	14.00	18.50
PG - 13.5	18.5	13.00	16.00	20.00
PG - 16	21.2	13.20	17.50	22.00
PG - 21	28.5	13.50	24.00	28.50
PG - 29	34.5	14.50	32.00	37.00
PG - 36	42.5	15.00	42.00	47.00
PG - 48	54.5	16.00	53.00	59.00

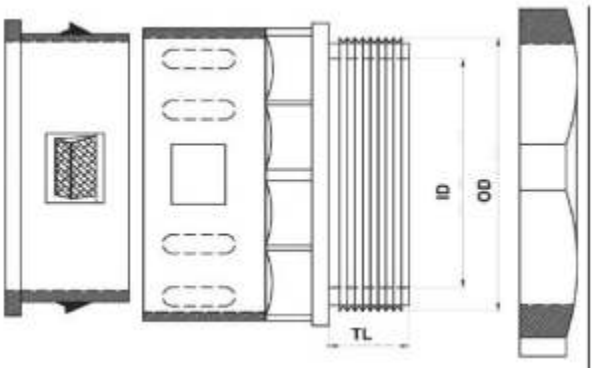

Waterproof Junction Box

H - Type

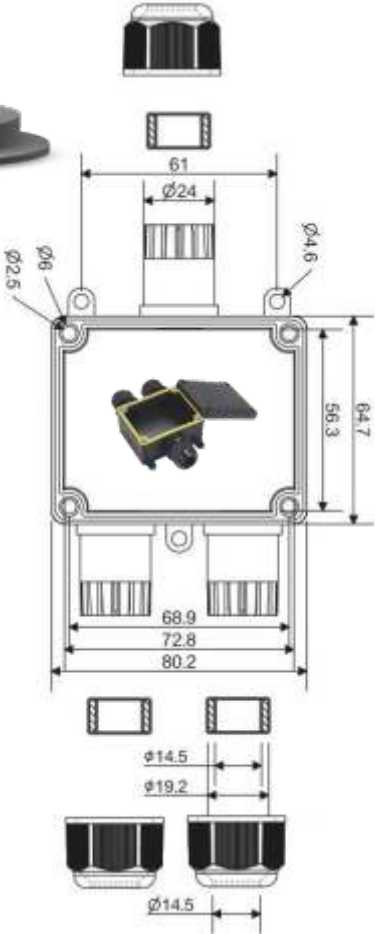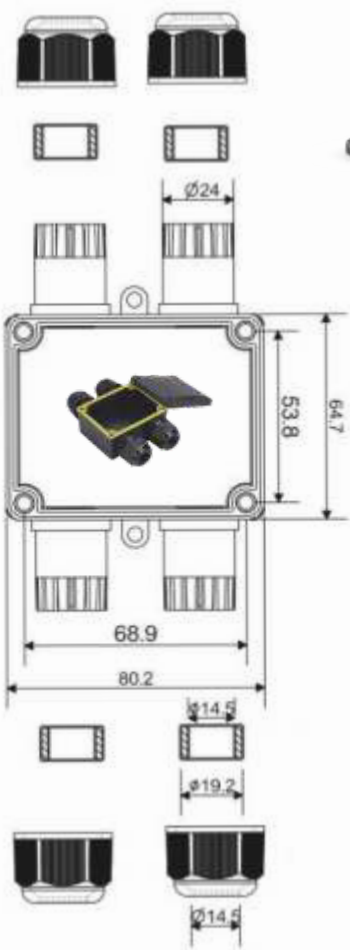

Y - Type

JUNCTION BOX TYPE	Cable Gland	Thread	Cable Range (mm.)	Inner Size (mm.) (L*W*H)
"T" TYPE	A, B & C	PG 19	Ø5-9mm, Ø9-12mm, Ø12-14mm	69*54*35
"H" TYPE	A, B, C & D	PG 19	Ø5-9mm, Ø9-12mm, Ø12-14mm	69*54*35


Waterproof Junction Box

Colours:  Black

- Rated Voltage
- : 450V AC/DC
- Wire Section
- : 2C, 3C, 4C, 5C, 0.5mm² - 4.0 mm²
- Waterproof
- : IP68 (IPX8 : 4M : 120H)
- Temperature Rating
- : -30°C to + 95°C



T - Type

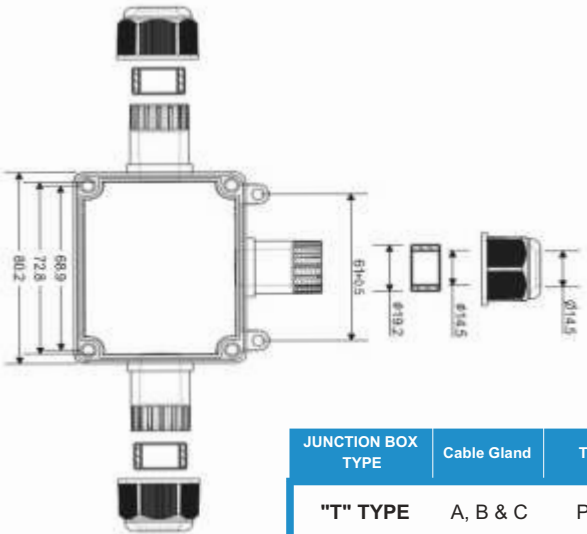

JUNCTION BOX TYPE	Cable Gland	Thread	Cable Range (mm.)	Inner Size (mm.) (L*W*H)
"T" TYPE	A, B & C	PG 19	v	69*54*35

Product Parts Introduction

Product Parts	Material
Top Cover	Polyamide (PA6-GF)
Box	Polyamide (PA6)
Cap	Polyamide (PA6)
Screw	Stainless steel
Insert	Brass
Outer Gland Body Washer	Silicon (Green/Black/Yellow)
Gasket	Silicon (Yellow/Green)

Junction Box One In One Out

Colours:  Black

Material:

PC/PA6



- Rated Voltage : 450V AC/DC
- Wire Section : 2C, 3C, 4C, 5C, 0.5mm² - 4.0 mm²
- Waterproof : IP68 (IPX8 : 4M : 120H)
- Temperature Rating : -30°C to + 95°C




Part Details	Quantity	Remarks
Junction Box bottom 1 in 1 Out	1	40.5 x 67.5
Junction Box Top	1	41.5 x 68.5
Junction Box Top Gasket	1	Silicon Rubber
PG- 9 Nut	2	PA6
PG- 9 Nut Washer	2	PVC
PG- 9 Body (Thread size 12mm)	2	PA6
PG- 9 Body Washer	2	PVC
PG- 9 Cap	2	PA6
Screw	4	MS4 x 12.5
Terminal Block 3 Pole	1	PA6

IP 68 CONNECTOR 1 In 3 Out

Colours: ● Black

Material:

Polyamide (PA6)

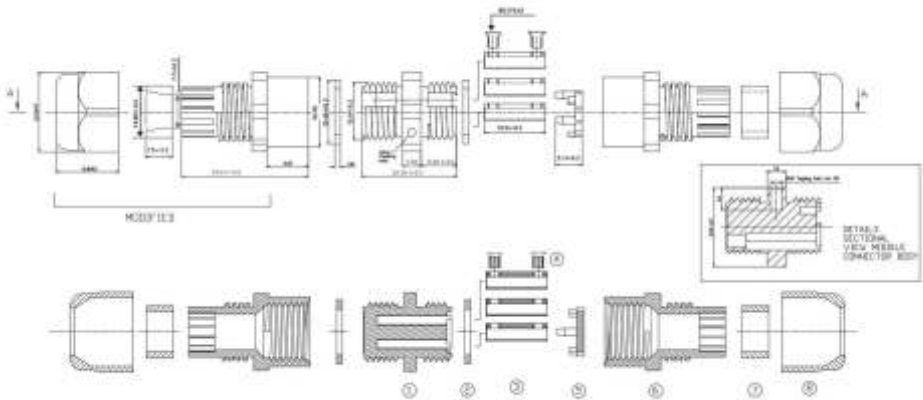

IP 68 CONNECTOR 1 In 5 Out

Colours: ● Black

Material:

Polyamide (PA6)

Dimension:

117x 90 x Ø 30



IP 68 CONNECTOR - 3 WAY

Colours:  Black

- Material

Model

Parameters

Terminations

Wire Cable Specification
- : Polyamide (PA6)

: M20 Screw Type, Connector 3 Pin

: 2 Way Connector
3 Pole Capability
IP68

: Screw Fixing

: 5mm (min) ~ 12mm (max)



IP 68 CONNECTOR - 5 WAY

Colours:  Black

- Material

Model

Parameters

Terminations

Wire Cable Specification
- : Polyamide (PA6)

: M20 Screw Type, Connector 5 Pin

: 2 Way Connector
5 Pole Capability
IP68

: Screw Fixing

: 5mm (min) ~ 12mm (max)



Additional Information

Part Details	3 Way	5 Way
Dimensions	85x Ø 24	85x Ø 24
Input Voltage	240 - 450 VAC	240 - 450 VAC
Rated Current	24 A	24 A
Wire Section	0.5 - 4 sq mm	0.5 - 2.5 sq mm
Working Temperature	- 20°C TO 100°C	- 20°C TO 100°C

IP 68 CONNECTOR T -Type 5 Poles

Colours:  Black



IP 68 CONNECTOR Y -Type 5 Poles

Colours:  Black



Material	Polyamide (PA6)
Input Voltage	240 - 430 VAC
Temperature Range	- 20°C TO 100°C
Wire Cable Specification	5mm (min) ~ 14mm (max)

**Note: Single entry and multi entry inserts available on demand.*

TECHNICAL SPECIFICATION OF CONNECTION DEVICE (M16 PVC IP 68 WIRE CONNECTOR)

MATERIAL - PVC FR
COLOUR - BLACK
TYPE - PLUG IN
MECHANICAL LIFE : 500 MATCHING CYCLES
CERTIFICATION : CE, RoHS , ISO 9001:2015, ISO 14001:2015

2 CORE



1) AMPERE/VOLTAGE : 21A - 40A, 440VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 6.40, 7.00, 7.20, 7.80, 8.50
8.70 & 9.70

3 CORE



1) AMPERE/VOLTAGE : 21A - 40A, 440VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 6.40, 7.00, 7.20, 7.80, 8.50
8.70 & 9.70

4 CORE



1) AMPERE/VOLTAGE : 21A - 40A, 440VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 6.0, 6.2 & 7.20

5 CORE



1) AMPERE/VOLTAGE : 6A, 300VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.5 SQMM.
4) CABLE OD MM. : 7.80, 8.50, 8.70 & 9.70

TECHNICAL SPECIFICATION OF CONNECTION DEVICE (M20 PVC IP 68 WIRE CONNECTOR)

MATERIAL - PVC FR
COLOUR - BLACK
TYPE - PLUG IN
MECHANICAL LIFE : 500 MATCHING CYCLES
CERTIFICATION : CE, RoHS , ISO 9001:2015, ISO 14001:2015

2 CORE




660VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 6.0, 6.20, 7.20, 10.60

3 CORE



1) 660VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 6.0, 6.20, 7.20, 10.60

4 CORE



1) AMPERE/VOLTAGE : 21A - 60A, 660VAC
2) WORKING TEMPERATURE : -40° TO 90°C
3) WIRE RANGE : 0.75 TO 2.5 SQMM.
4) CABLE OD MM. : 7.20 & 10.60

5 CORE

NA

NA

IP 68 "T" CONNECTOR PUSH IN

Colours:  Black

Material : POLYAMIDE 6

Type : Push Fit

Model : M20 "T" Type, Connector 3 Pin

Ampere/Voltage : 24A 450VAC

Working Temperature : -40° to 110°C

Wire Range : 0.5 TO 2.5 sq mm

Number of Pole : 3 Pin



IP 68 "T" CONNECTOR PUSH IN

Colours:  Black

Material : POLYAMIDE 6

Type : Push Fit

Model : M20 Straight, Connector 3 Pin

Ampere/Voltage : 24A 450VAC

Working Temperature : -40° to 110°C

Wire Range : 0.5 TO 2.5 sq mm

Number of Pole : 3 Pin



IP 68 "X" CONNECTOR SCREW TYPE

Colours: ● Black

Material : POLYAMIDE 6
Type : Screw Type
Model : M20 "X" Type IP 68
Connector 3 Pin
Ampere/Voltage : 24A 450VAC
Working Temperature : -40° to 110°C
Wire Range : 0.5 TO 2.5 sq mm
Number of Pole : 3 Pin



Gel Connector (8102)

Colours:  Blue

& Other colour on request

Material : PP


Type : Foldable

Ampere/Voltage : 24A 450VAC

Working Temperature : -20° to 90°C

Cross Section : 2C, 3C, 0.5mm² - 2.5 mm²

Size : 42.3*37.5*26 mm

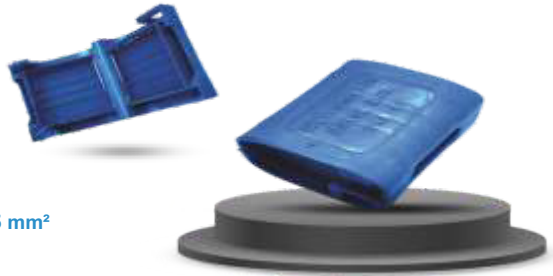

Gel Connector (8103)

Colours:  Blue

 Green

& Other colour on request

Material : PP

Type : Foldable

Ampere/Voltage : 24A 450VAC

Working Temperature : -20° to 90°C

Cross Section : 2C, 3C, 0.5mm² - 2.5 mm²

Size : 52*37.6*26.2 m



Gel Connector (8105)

Colours:  Blue

 Green

& Other colour on request

Material : PP


Type : Foldable

Ampere/Voltage : 24A 450VAC

Working Temperature : -20° to 90°C

Cross Section : 2C, 3C, 0.5mm² - 2.5 mm²

Size : 74*42*26 mm

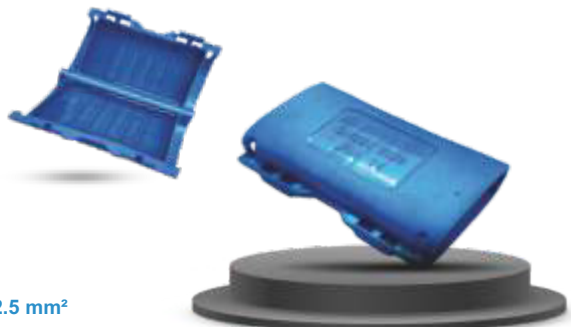

Air Breather/Vent Plug

- Colours:
- Light Grey
 - Black
 - Customized

Type	Material	Membrane
M12 * 1.5 mm	PA6/PC	ePTFE



Solar MC4 PV Connector

- Colours:
- Black

Material:
Polyamide (PA6)



Loop In Loop Out Terminal Connector


- Colours:
- White

Material:	Width x Height	Wire Clamping Range	Wire Stripping Length
ABS / PC	38.8 x 34.8 mm	0.5 to 2.5 mm ²	7.00 mm



Enclosure for Push Button Station

- Colours:
-  Light Grey
 -  Black
 -  Yellow

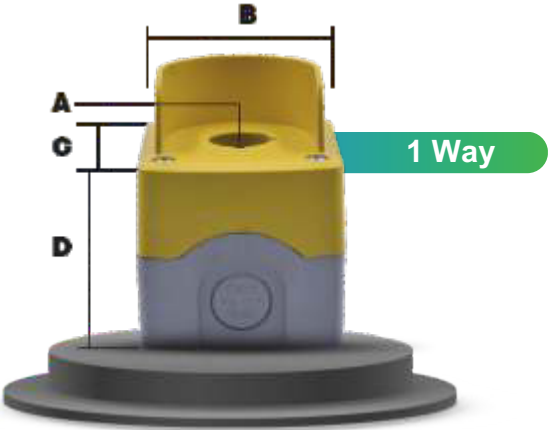

Type	Material	A (OD)	B (ID)	C	D
1 Way	ABS	Ø 21.80	75.50	69.50	65.50
2 Way	ABS	Ø 22.40	170.00	69.50	66.00
3 Way	ABS	Ø 22.40	170.00	69.50	66.00

Emergency Push Button Cover



Colours: Transparent
Yellow



Material	A (OD)	B (ID)	C	D
PC/SAN/ABS	55.00	50.40	36.30	Ø 22

Safety Cover

Colours: Yellow

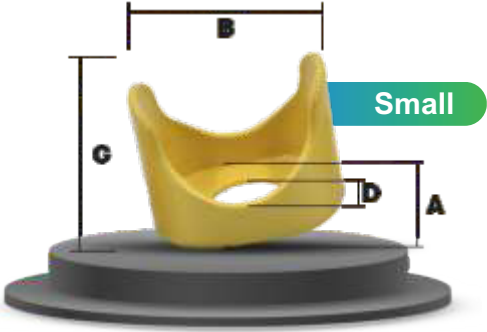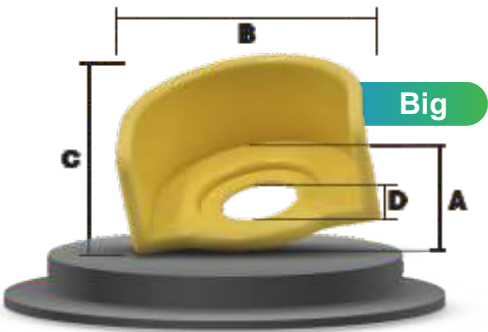

Material	A (OD)	B (ID)	C	D
ABS	70.00	59.50	32.00	Ø 22.50
ABS	48.00	55.50	39.60	Ø 22.20

Enlarger M20/25 & M25/32

Colours:  Light Grey

 Black

 Customized

Material : Polyamide (PA6)



Reducer M20/25

Colours:  Light Grey

 Black

 Customized

Material : Polyamide (PA6)



Blanking Plug

Colours:  Light Grey

 Black

 Customized

Material: : Polyamide (PA6)

Size: : M12, M16, M20, M25, M32, M40



Drain Plug

Colours:  White

Material:
Polystyrene




Handle - Plastic


Colours:  Black
 Customized



Without Insert

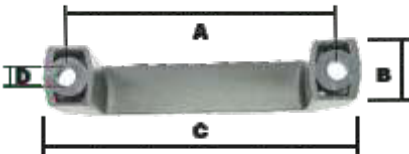

With Insert

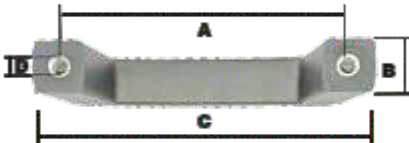

Product Type	Material	A	B	C	D
Handle w/o Insert	PP/NYLON	115.50	15.00	129.00	8.40
Handle with Insert	PA6-GF	94.50	12.00	112.00	M6*1.0 mm.

Our Customers



Certifications



ISO 9001-2015



International Industrial Sourcing & Export Partner



Industrial Sourcing | Export Logistics | ASEAN Supply Desk
Hub: New Delhi, India | info@autovedaglobal.com | www.autovedaglobal.com
Commercial support & Form A1 processing available for qualifying exports
under the ASEAN-India Free Trade Area (AIFTA)

