


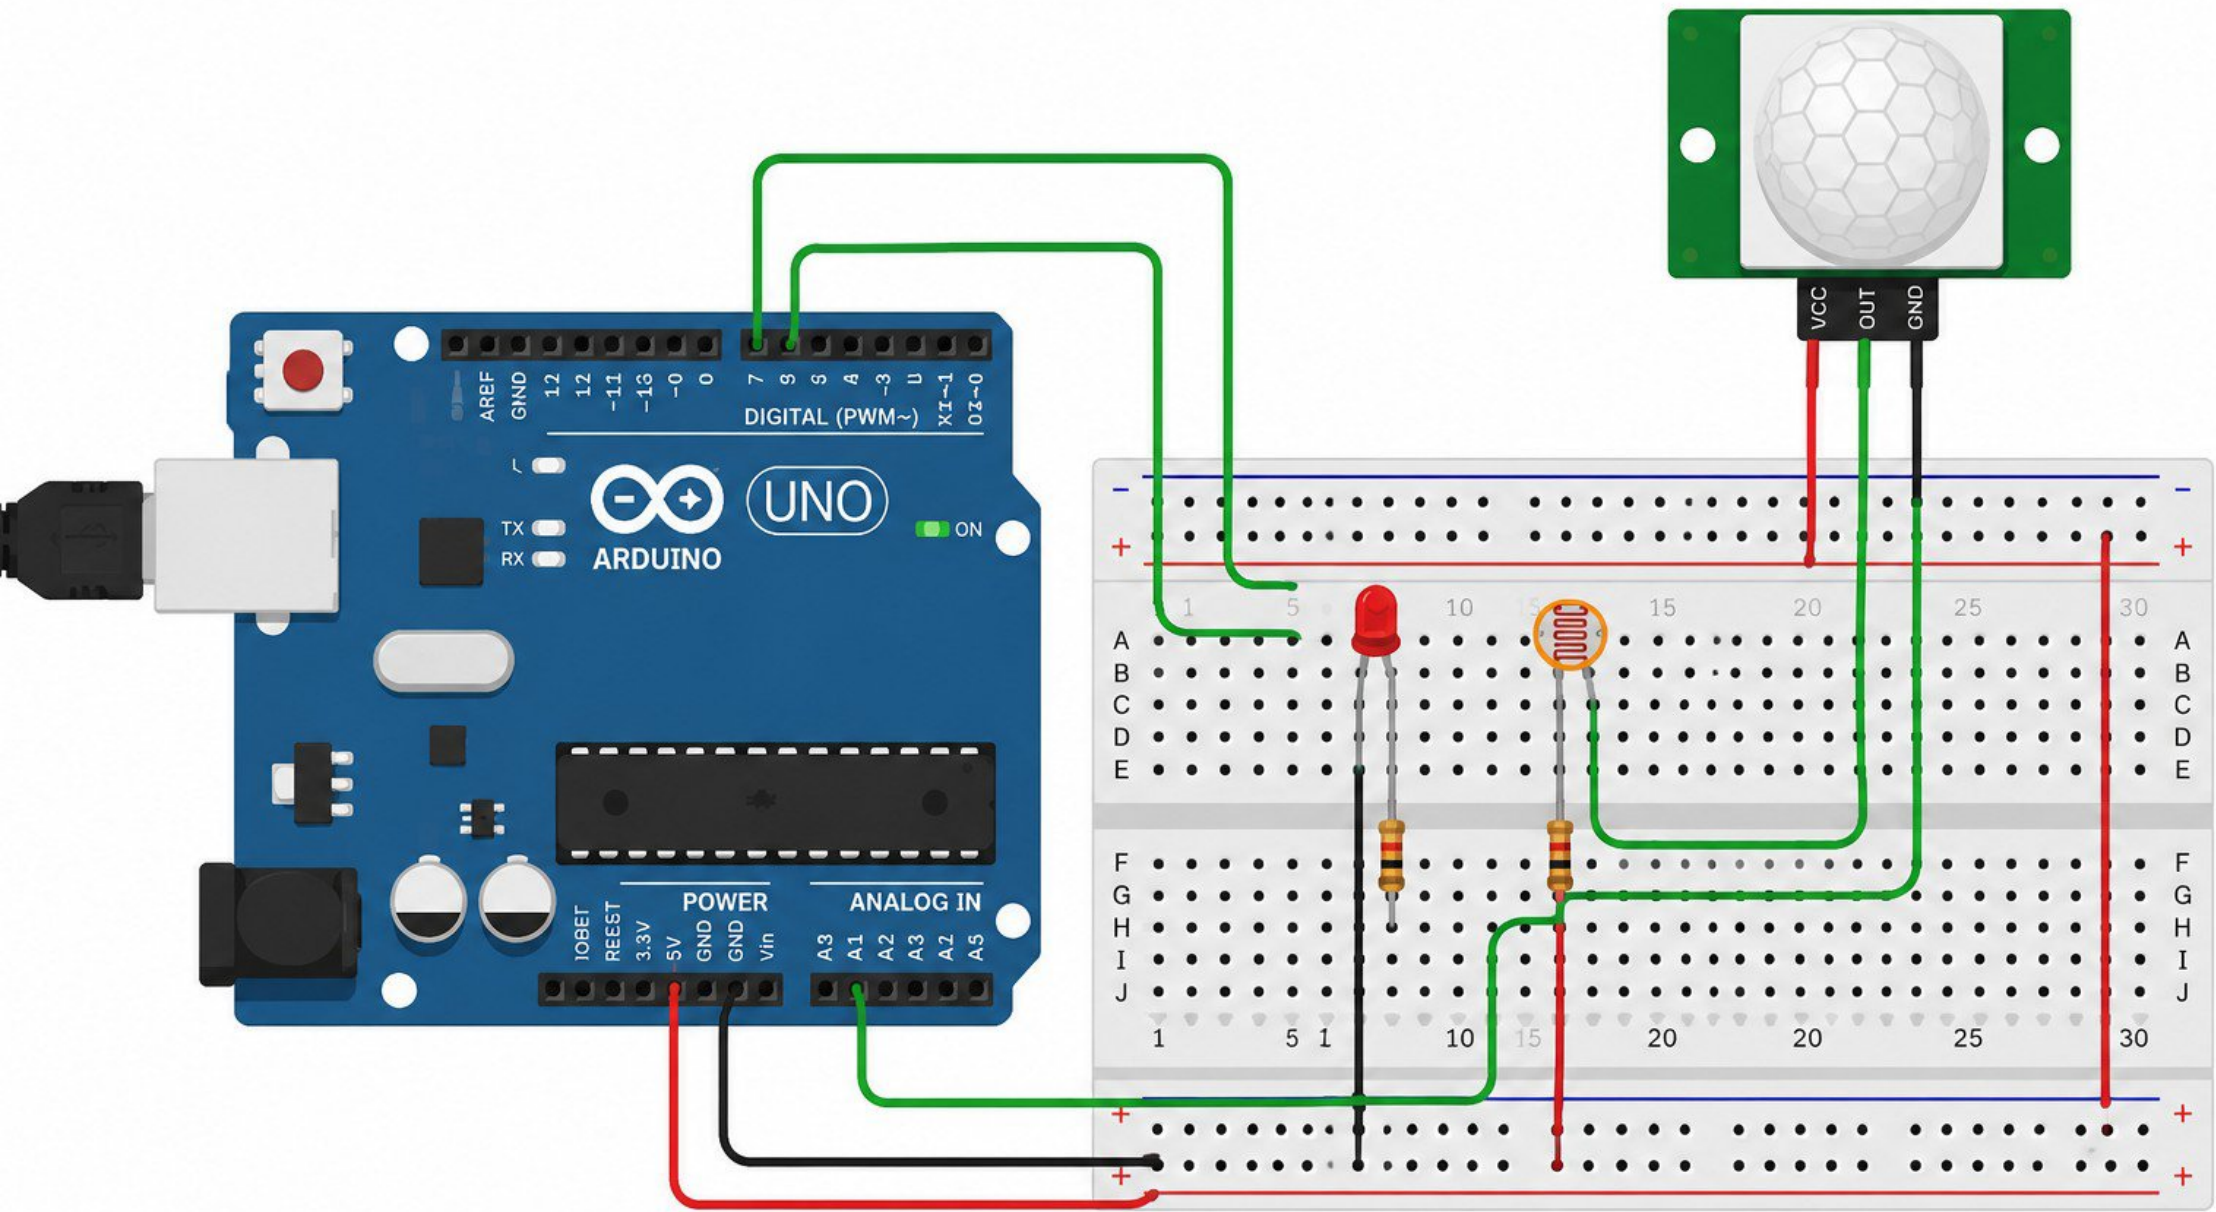

```
int ldr = A0;  
int led = 13;  
int pir = 7;
```

```
void setup() {  
  pinMode(led, OUTPUT);  
  pinMode(pir, INPUT);  
  Serial.begin(9600);  
}
```

```
void loop() {  
  int light = analogRead(ldr);  
  int motion = digitalRead(pir);
```

```
  if (light < 300) { // dark condition  
    digitalWrite(led, HIGH);
```

```
    if (motion == LOW) {  
      Serial.println("No movement! Stay  
focused!");  
    }
```

```
  } else {  
    digitalWrite(led, LOW);  
  }
```

```
  delay(1000);  
}
```