

This is a detailed PCB layout for a LiPo Charger, DC/DC converter, IMU, and nRF52840 module. The layout is organized into four main sections: LiPo Charger, DC/DC, IMU, and nRF52840.

LiPo Charger: The circuit includes a BQ25180YBGR (IC1) connected to a VBUS/2.60V source and a VBAT/2.50V source. It features a 10uF capacitor (C39) and a 10K resistor (R9) for the INT pin.

DC/DC: The circuit includes a RT6160AWSC (IC9) connected to a VREG source and a 3V3/2.4A source. It features a 10uF capacitor (C24), a 0.1uF capacitor (C23), and a 3V3/2.4A source for the EN pin.

IMU: The circuit includes a BMA423 (IC3) connected to a 3V3/2.4A source and a 100nF capacitor (C19). It features a 3V3/2.4A source for the VDD pin.

nRF52840: The circuit includes an nRF52840 module connected to a 3V3/2.4A source and a 100nF capacitor (C8). It features a 3V3/2.4A source for the VDD pin.

The layout also includes a SWD section with a TC2030-DC (J2) connected to a 3V3/2.4A source and a 100nF capacitor (C8).



Legend:

- TP_SWO
- TP_SWDIO
- TP_SWDCLK
- TP_RESET
- TP_3.3V
- TP_GND


Project Information:

- project-tsc
- 18/04/2026 14:43
- Sheet: 1/2


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

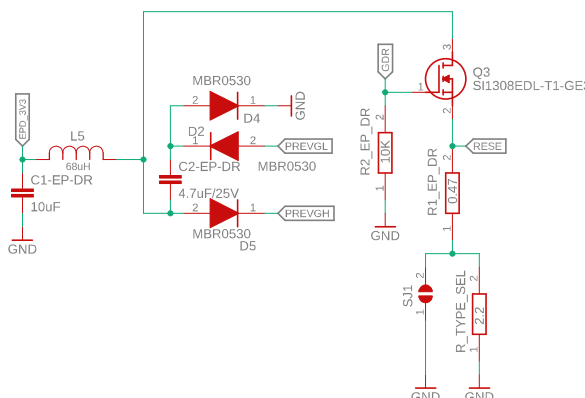


Haptic Driver

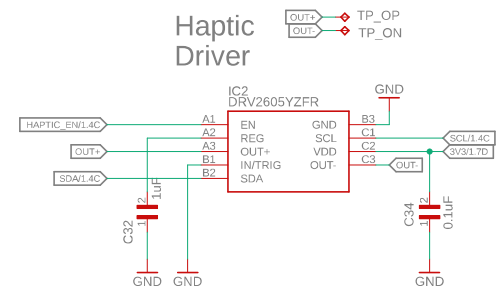


E-Paper Display Connector

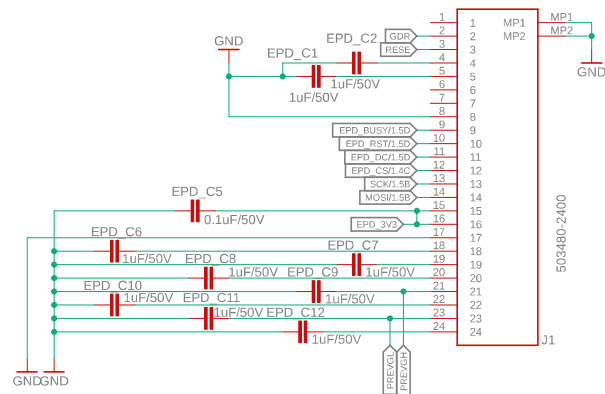

Fuel Gauge

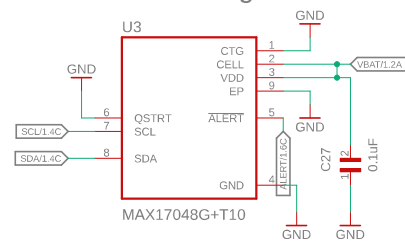

Buttons

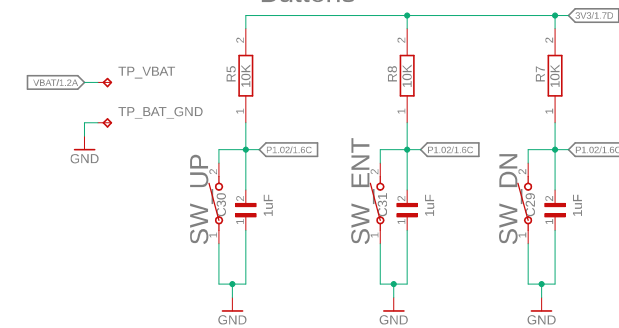

USB C Connector & ESD Protection

