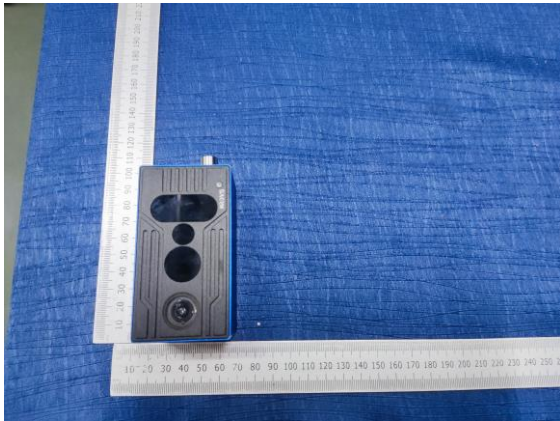


Prüfbericht-Nr.: Test report no.:	CN24DZA6 001	Auftrags-Nr.: Order no.:	168460560	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: Client reference no.:	40974830	Auftragsdatum: Order date:	2024-01-10	
Auftraggeber: Client:	Zhejiang MRDVS Technology Co., Ltd. 1st Floor, No. 5 Building, Phase II of High-end Manufacturing Industrial Park, No. 1177 Xin'an Road, High-tech Zone, Wuxing District, Huzhou, 313000 Zhejiang P.R. China			
Prüfgegenstand: Test item:	Eagle-M4 (Refer to section 3.1 for details.)			
Bezeichnung / Typ-Nr.: Identification / Type no.:	LXPS-M4422-79E-940B			
Auftrags-Inhalt: Order content:	TUV Rheinland - EMC service			
Prüfgrundlage: Test specification:	EN IEC 61000-6-2:2019 EN IEC 61000-6-4:2019			
Wareneingangsdatum: Date of sample receipt:	2024-01-10			
Prüfmuster-Nr.: Test sample no.:	A003653057-001			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	Refer to section 2.1			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by: Zack Zhu Under supervised by: Murphy Chen Datum: Date: 2024-03-21	 	genehmigt von: authorized by: Felix Tao Ausstellungsdatum: Issue date: 2024-03-21		
Stellung / Position:	Project Handler	Stellung / Position:	Reviewer	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: Test Report No.	CN24DZA6 001	Seite 2 von 25 Page 2 of 25
Anmerkungen Remarks		

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 3 von 25

Page 3 of 25

TEST SUMMARY

5.1.1 TERMINAL CONTINUOUS DISTURBANCE VOLTAGE AT DC POWER PORT

Not Applicable

5.1.2 TERMINAL CONTINUOUS DISTURBANCE VOLTAGE AT WIRED NETWORK PORT

RESULT: Pass

5.2.1 RADIATED DISTURBANCE (BELOW 1GHz)

RESULT: Pass

5.2.2 RADIATED DISTURBANCE (ABOVE 1GHz)

RESULT: Pass

6.2.1 RADIO-FREQUENCY ELECTROMAGNETIC FIELD AMPLITUDE MODULATED (RS)

RESULT: Pass

6.2.2 RADIO-FREQUENCY CONTINUOUS CONDUCTED (CS)

Not Applicable

6.2.3 POWER-FREQUENCY MAGNETIC FIELDS

Not Applicable

6.3.1 FAST TRANSIENTS (EFT)

Not Applicable

6.3.2 SURGE

Not Applicable

6.3.3 ELECTROSTATIC DISCHARGES (ESD)

RESULT: Pass

6.4.1 VOLTAGE DIPS AND INTERRUPTIONS

Not Applicable

Contents

1.	GENERAL REMARKS	6
1.1	COMPLEMENTARY MATERIALS	6
2.	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
5.	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz	10
5.1.1	<i>Terminal Continuous Disturbance Voltage at DC power port</i>	<i>10</i>
5.1.2	<i>Terminal Continuous Disturbance Voltage at wired network port</i>	<i>11</i>
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz	12
5.2.1	<i>Radiated Disturbance (Below 1GHz)</i>	<i>12</i>
5.2.2	<i>Radiated Disturbance (Above 1GHz)</i>	<i>13</i>
6.	TEST RESULTS IMMUNITY	14
6.1	CLASSIFICATION OF APPARATUS	14
6.2	CONTINUOUS DISTURBANCES	15
6.2.1	<i>Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)</i>	<i>15</i>
6.2.2	<i>Radio-Frequency Continuous Conducted (CS)</i>	<i>16</i>
6.2.3	<i>Power-frequency Magnetic Fields</i>	<i>17</i>
6.3	TRANSIENT DISTURBANCES	18
6.3.1	<i>Fast Transients (EFT)</i>	<i>18</i>
6.3.2	<i>Surge</i>	<i>19</i>
6.3.3	<i>Electrostatic Discharges (ESD)</i>	<i>20</i>
6.4	POWER SUPPLY ALTERATIONS	21

6.4.1 Voltage Dips and Interruptions.....21

7. PHOTOGRAPHS OF THE TEST SET-UP22

8. LIST OF TABLES25

9. LIST OF PHOTOGRAPHS25

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 6 von 25

Page 6 of 25

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

Appendix 2: Measurement uncertainties

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd. Testing Center
No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

Prüfbericht - Nr.: CN24DZA6 001
Test Report No.

Seite 7 von 25
Page 7 of 25

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Until
Conducted Emission				
EMI Test Receiver	R&S	ESR3	102428	2024-07-30
Impedance Stabilisation Network	R&S	ENY81-CA6	101810	2024-07-31
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A
Radiated Disturbance				
3m SAC	ETS-Lindgren	SAC3	CT001632-Q1362	2024-04-26
EMI Test Receiver	R&S	ESR7	102111	2024-11-09
Horn Antenna	R&S	HF907	102706	2024-08-03
Preamplifier (1-18GHz)	FIT	SCU-18F	180077	2024-07-31
Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	2024-08-19
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A
Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)				
3m FAC	ETS-Lindgren	FAC3	CT001632-Q1360	2024-04-26
Signal Generator	R&S	SMB100A	115183	2024-07-30
Power Amplifier	R&S	BBA150-BC250	103102	2024-07-31
Power Amplifier	R&S	BBA150-D110E100	103117	2024-08-27
NRP6AN Average power sensor	R&S	NRP6AN	101161	2024-07-30
NRP6AN Average power sensor	R&S	NRP6AN	101162	2024-07-30
Stacked double Log.-Per. Antenna1825022	SCHWARZBECK	STLP 9128E	0153	2024-12-29
Stacked Log.-Per. Antenna	SCHWARZBECK	STLP 9149	00520	2024-12-29
EMC32 test software	R&S	EMC32(Ver.10.30.01)	N/A	N/A
Electrostatic Discharges (ESD)				
ESD Tester	TESEQ	NSG-437	1282	2024-07-30

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is **Eagle-M4**, it is a **3D Vision Camera** and intended to use in industrial environments.

The M4 5PIN port is used only for power supply, not for communication in normal use.

In practical environment, the length of the cable connecting the Ethernet port and M4 5-pin port is less than 3m.

For details, please refer to the manufacturer's Circuit Diagram & Instruction Manual.

3.2 Ratings and System Details

Model:	LXPS-M4422-79E-940B
System input voltage:	DC 24V
Rated Frequency:	/
Rated Input Current:	3A
Rated Output:	/
Protection class:	III
Highest internal frequency:	1560MHz

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the manufacturer's Circuit Diagram.

3.5 Submitted Documents

- Instruction Manual
- PCB Layout
- Rating Label
- Circuit Diagram

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure their highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Immunity: The equipment under test (EUT) was configured to have their highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Item	Manufacturer	M/N	S/N	Remark
Portable Laptop	Lenovo	ThinkPad T480	10Q67059	--
DC power supply	APS	ADC-0800100-15	D218050011	--
5-Pin Aviation Plug Power Cable*	--	--	--	Not Shielded, for power supply only.
Network cable*	--	--	--	Not Shielded.
Remark*: These two lines are provided by the customer to assist with testing.				

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

5. Test Results EMISSION

5.1 Emission in the Frequency Range up to 30 MHz

5.1.1 Terminal Continuous Disturbance Voltage at DC power port

Not Applicable

Date of testing	:	--
Test standard	:	EN IEC 61000-6-4:2019
Frequency range	:	0.15 - 30MHz
Limits	:	Table A.1 of EN IEC 61000-6-4:2019
Kind of test site	:	Shielded room
Tested Port	:	--

Remark: This test item belongs to proposed requirement, and the DC input port cable is less than 3m, therefore, this test item is not applicable.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 11 von 25

Page 11 of 25

5.1.2 Terminal Continuous Disturbance Voltage at wired network port

RESULT:

Pass

Date of testing	:	Refer to Appendix 1
Test standard	:	EN IEC 61000-6-4:2019
Frequency range	:	0.15 - 30MHz
Limits	:	Table 5 of EN IEC 61000-6-4:2019
Kind of test site	:	Shielded room
Tested Port	:	LAN Port

Test setup

Input Voltage	:	DC 24V (external power supply input)
Operation Condition	:	Clause 4 of EN IEC 61000-6-4:2019
Operation mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1

Refer to attached Appendix 1.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 12 von 25

Page 12 of 25

5.2 Emission in the Frequency Range above 30 MHz

5.2.1 Radiated Disturbance (Below 1GHz)

RESULT:

Pass

Date of testing	:	Refer to Appendix 1
Test standard	:	EN IEC 61000-6-4:2019
Frequency range	:	30 - 1000MHz
Limits	:	Table 3 of EN IEC 61000-6-4:2019
Kind of test site	:	3m Semi-Anechoic Chamber
Tested Port	:	Enclosure

Test setup

Input Voltage	:	DC 24V (external power supply input)
Operation Condition	:	Clause 4 of EN IEC 61000-6-4:2019
Operation mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1

Refer to attached Appendix 1.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 13 von 25

Page 13 of 25

5.2.2 Radiated Disturbance (Above 1GHz)

RESULT:

Pass

Date of testing	:	Refer to Appendix 1
Test standard	:	EN IEC 61000-6-4:2019
Frequency range	:	1000 - 6000MHz
Limits	:	Table 3 of EN IEC 61000-6-4:2019
Kind of test site	:	3m Semi-Anechoic Chamber
Tested Port	:	Enclosure

Test setup

Input Voltage	:	DC 24V (external power supply input)
Operation Condition	:	Clause 4 of EN IEC 61000-6-4:2019
Operation mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1

Refer to attached Appendix 1.

6. Test Results IMMUNITY

6.1 Classification of apparatus

According to EN IEC 61000-6-2:2019, the EUT shall be tested in accordance with table 1, 2 & 3, and comply with following performance criterion:

Continuous Disturbance

Power-Frequency Magnetic Fields	N/A
Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)	Criterion A
Radio-Frequency Continuous Conducted (CS)	N/A

Transient Disturbance

Fast Transients (EFT)	N/A
Surge	N/A
Electrostatic Discharges (ESD)	Criterion B

Power Supply Alterations

Voltage Dips and Interruptions	N/A
--------------------------------	-----

Prüfbericht - Nr.: CN24DZA6 001
Test Report No.

Seite 15 von 25
Page 15 of 25

6.2 Continuous Disturbances

6.2.1 Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)

RESULT:

Pass

Date of Testing : 2024-03-05
Test Specification : EN IEC 61000-6-2:2019
Basic Standard : IEC 61000-4-3:2006+A1+A2
Criterion : A
Frequency Range : 80 – 6,000MHz
Test Level : 10V/m, 80 – 1000MHz
3V/m, 1.4 – 6.0GHz
(Unmodulated, r.m.s.)
Modulation : AM 80%, 1kHz sine-wave
Test distance : 3m
Tested Port : Enclosure

Test setup

Input Voltage : DC 24V (external power supply input)
Operation Mode : A
Earthing : Not Connected
Ambient temperature : 23.6°C
Relative humidity : 54.2%
Atmospheric pressure : 100.2kPa

Test result:

Polarization	Frequency Range	Test Level	Criterion	Description	Conclusion
Horizontal	80MHz to 1000MHz	10V/m (rms)	A	Operating as intended, no failure detected	Pass
Vertical	80MHz to 1000MHz	10V/m (rms)	A	Operating as intended, no failure detected	Pass
Horizontal	1.4GHz to 6GHz	3V/m (rms)	A	Operating as intended, no failure detected	Pass
Vertical	1.4GHz to 6GHz	3V/m (rms)	A	Operating as intended, no failure detected	Pass

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 16 von 25

Page 16 of 25

6.2.2 Radio-Frequency Continuous Conducted (CS)

Not Applicable

Date of testing	:	--
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-6:2013
Criterion	:	A
Frequency range	:	0.15 – 80 MHz
Source impedance	:	150Ω
Test level	:	10V (unmodulated, r.m.s.)
Modulation	:	AM 80%, 1kHz sine-wave
Sweep mode	:	automatic
Sweep rate	:	$<1.5 \times 10^{-3}$ decade/sec.

Remark: Since the length of cables connecting to DC input power port and signal port is less than 3m, therefore, this test item is not applicable.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 17 von 25

Page 17 of 25

6.2.3 Power-frequency Magnetic Fields

Not Applicable

Date of testing	:	--
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-8:2009
Criterion	:	A
Test Frequency	:	50/60Hz
Test level	:	30A/m
Tested Port	:	Enclosure

Remark: Since the EUT does not contain any components susceptible to magnetic fields. The Power Frequency Magnetic Fields test is not applicable.

6.3 Transient Disturbances

6.3.1 Fast Transients (EFT)

Not Applicable

Date of testing	:	--
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-4:2012
Criterion	:	B
Test level	:	±1kV
Test duration	:	≥120sec
Rise time	:	5/50ns
Repetition frequency	:	5kHz

Remark: The length of cable connecting to DC input power port, signal port is less than 3m, and DC ports which are not intended to be connected to a DC distribution network, therefore, this test item is not applicable.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 19 von 25

Page 19 of 25

6.3.2 Surge

Not Applicable

Date of testing	:	--
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-5:2014
Criterion	:	B
Source impedance	:	2Ω, 12Ω, 42Ω
Test level	:	±0.5kV, ±1.0kV
Number of surges	:	5 (for each combination of parameters)
Repetition rate	:	Max. 1/min
Tested Port	:	DC input power port, Signal port

Remark: The length of cable connecting to DC input power port and signal port is less than 30m. therefore, this test item is not applicable.

6.3.3 Electrostatic Discharges (ESD)

RESULT:

Pass

Date of testing	:	2024-02-27
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-2:2008
Criterion	:	B
Charge voltage	:	±2.0kV, ±4.0kV, ±8kV (air discharge) ±4.0kV (contact discharge)
Number of discharges	:	>10
Tested Port	:	Enclosure

Test Setup

Input Voltage	:	DC 24V (external power supply input)
Operation Mode	:	A
Earthing	:	Not Connected
Ambient temperature	:	24.6°C
Relative humidity	:	53.6%
Atmospheric pressure	:	101 kPa

Test result:

Test Point	Test Mode	Test Level (kV)	Performance Criterion	Description	Result
VCP	C	±4	B	No failure detected	Pass
HCP	C	±4	B	No failure detected	Pass
Conducted Enclosure	C	±4	B	No failure detected	Pass
Slot	A	±2, ±4, ±8	B	No failure detected	Pass
Non-Conducted Enclosure	A	±2, ±4, ±8	B	No failure detected	Pass

Note: A-Air discharge; C- Contact Discharge; VCP- Vertical Coupling Plane; HCP- Horizontal Coupling Plane.

Prüfbericht - Nr.: CN24DZA6 001

Test Report No.

Seite 21 von 25

Page 21 of 25

6.4 Power Supply Alterations

6.4.1 Voltage Dips and Interruptions


Not Applicable

Date of testing	:	--
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-11:2004
Criterion	:	B & C
Tested Port	:	--


Remark: The EUT's input voltage is 24Vdc and not connect to public low-voltage distribution system. therefore, this item is not applicable.

7. Photographs of the Test Set-Up


Photograph 1: Terminal Continuous Disturbance Voltage at wired network port

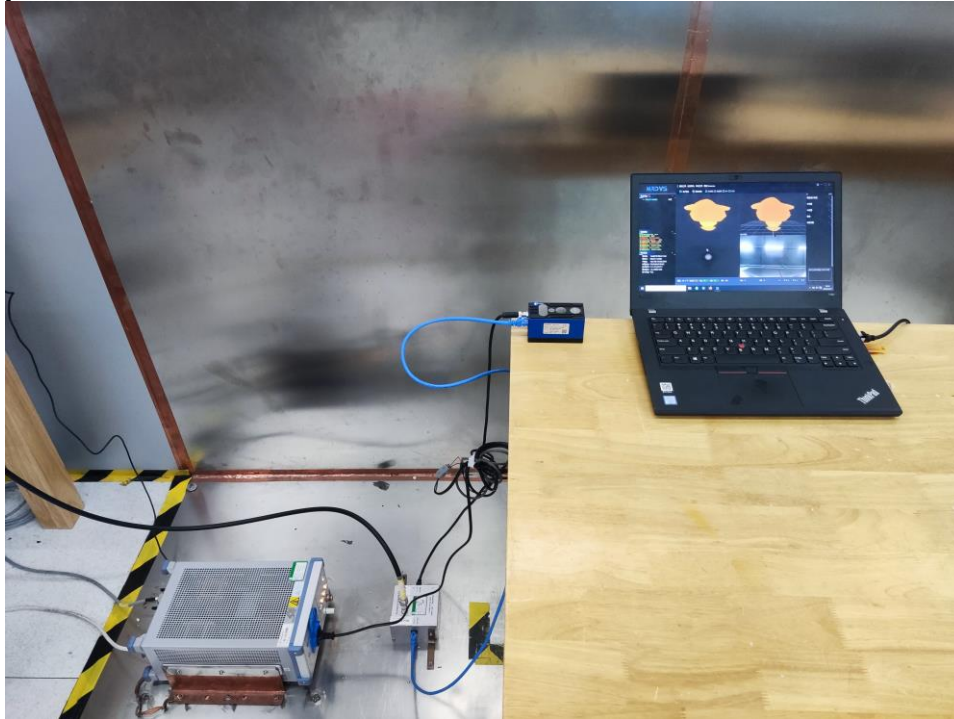

Photograph 2: Set-up for Radiated Emission
Below 1GHz

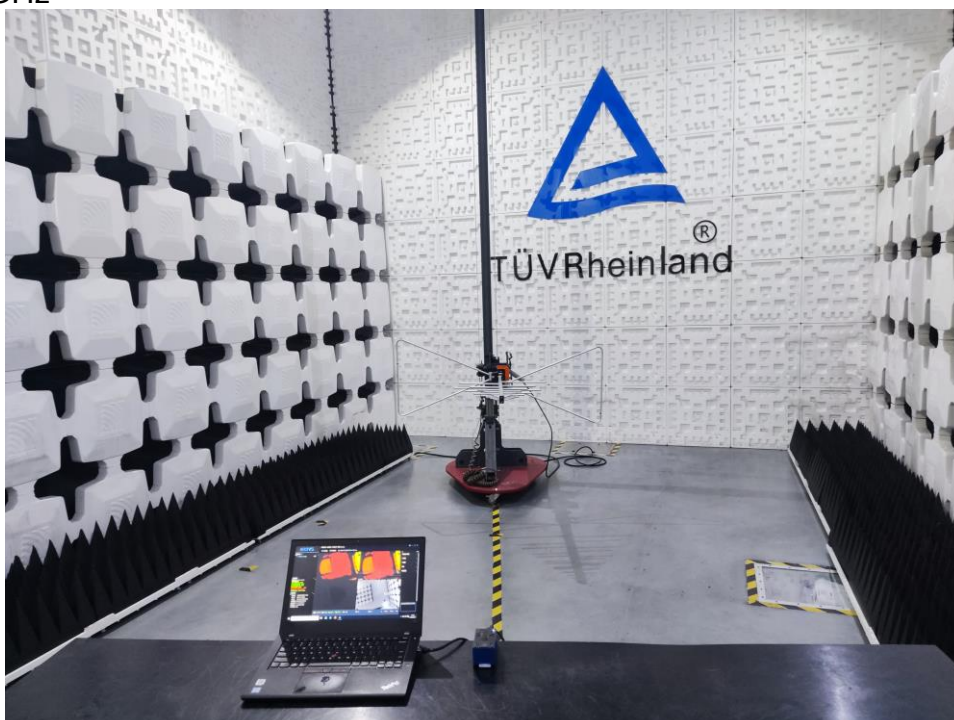

Above 1GHz

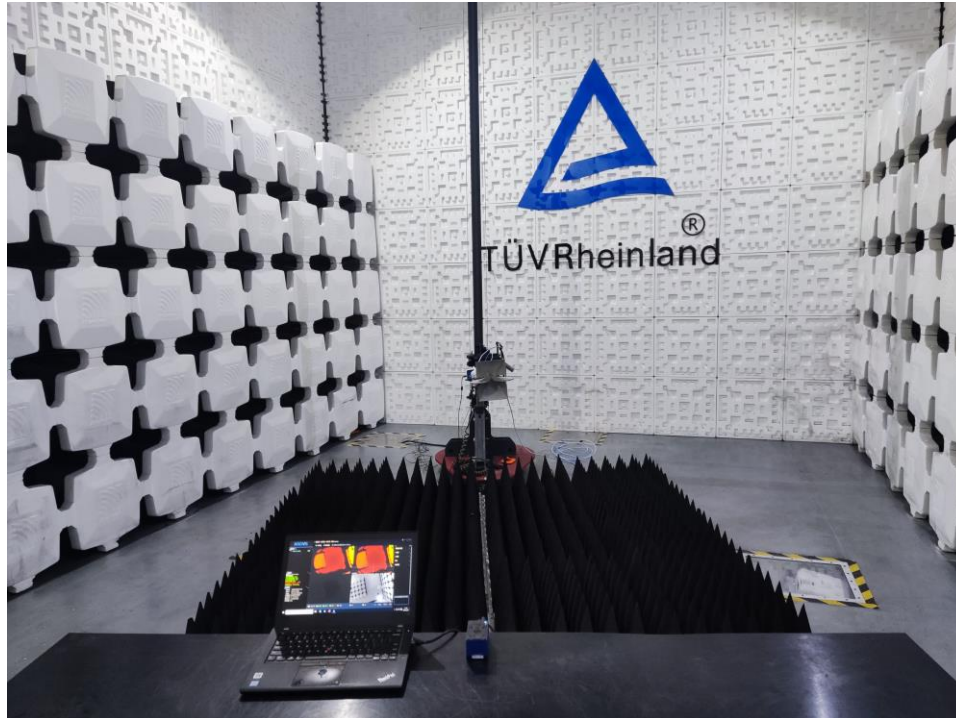


Photograph 3: Set-up for Continuous RF electromagnetic field disturbances
80-1000MHz



1400-6000MHz



Photograph 4: Set-up for Electrostatic Discharges

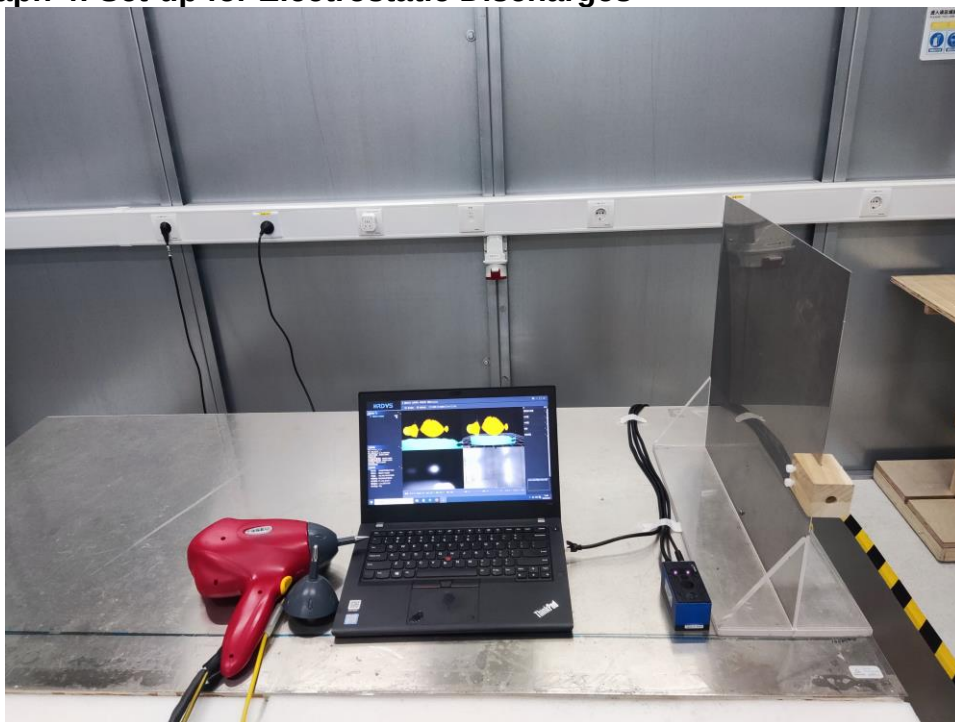

8. List of Tables

Table 1: List of Test and Measurement Equipment7


9. List of Photographs

Photograph 1: Terminal Continuous Disturbance Voltage at wired network port.....22
Photograph 2: Set-up for Radiated Emission22
Photograph 3: Set-up for Continuous RF electromagnetic field disturbances23
Photograph 4: Set-up for Electrostatic Discharges24

Test Report

EUT Information

EUT Name:	Eagle-M4
Order Number:	168460560 10
Model:	LXPS-M4422-79E-940B
Test Mode:	Camera ON
Test Voltage:	DC 24V
Test Standard:	EN IEC 61000-6-4
Test By:/Review By:	Guangshen Cen / Gary Chen
Tem./Hum./Pressure:	23.3°C/54.8%/101kPa
Remark:	SR1

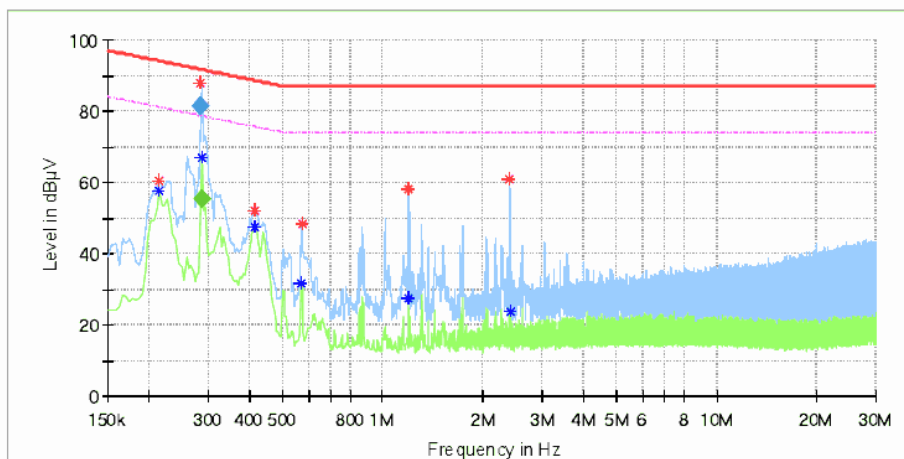

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Corr. (dB)
0.214000	60.40	---	94.05	33.65	9.9
0.214000	---	57.60	81.05	23.44	9.9
0.285000	87.96	---	91.64	3.68	9.8
0.286000	---	67.08	78.64	11.56	9.8
0.414000	---	47.51	75.57	28.06	9.7
0.414000	52.18	---	88.57	36.39	9.7
0.570000	---	31.86	74.00	42.14	9.7
0.574000	48.59	---	87.00	38.41	9.7
1.194000	---	27.57	74.00	46.43	9.6
1.198000	58.26	---	87.00	28.74	9.6
2.402000	61.07	---	87.00	25.93	9.6
2.406000	---	23.89	74.00	50.11	9.6


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)
0.285000	81.59	---	91.52	9.94	1000.0	9.000	9.8
0.286000	---	55.22	80.60	25.37	1000.0	9.000	9.9

Test Report

EUT Information

EUT Name:	Eagle-M4
Order Number:	168460560 10
Model:	LXPS-M4422-79E-940B
Test Mode:	Camera ON
Test Voltage:	DC 24V
Test Standard:	EN IEC 61000-6-4
Test By:/Review By:	Guangshen Cen / Gary Chen
Tem./Hum./Pressure:	24.1°C/52.6%/101kPa
Remark:	3m chamber

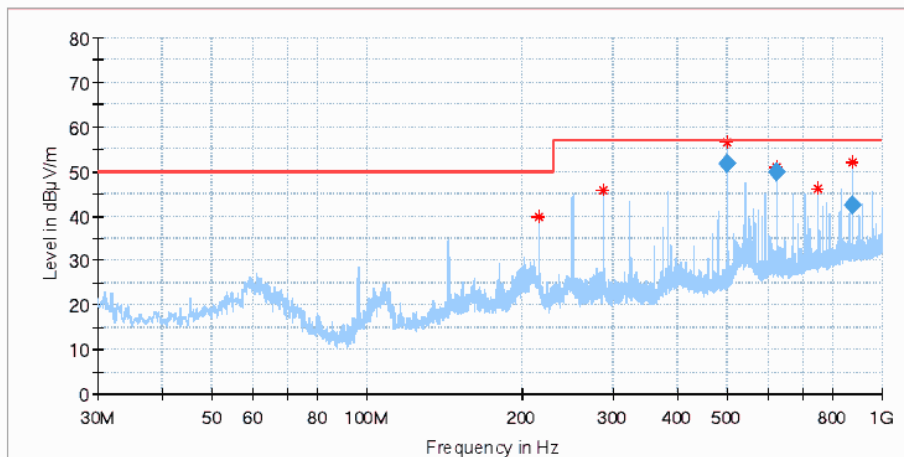

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
215.949000	39.72	50.00	10.28	200.0	H	133.0	17.7
287.923000	45.82	57.00	11.18	200.0	H	57.0	21.3
500.005000	56.38	57.00	0.62	100.0	H	276.0	26.5
624.998000	50.90	57.00	6.10	100.0	H	0.0	29.7
749.934000	46.25	57.00	10.75	100.0	H	0.0	31.7
874.967000	52.10	57.00	4.90	200.0	H	256.0	33.4


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
500.005000	51.86	57.00	5.14	1000.0	120.000	100.0	H	276.0	26.5
624.998000	49.96	57.00	7.04	1000.0	120.000	100.0	H	0.0	29.7
874.967000	42.48	57.00	14.52	1000.0	120.000	200.0	H	256.0	33.4

Test Report

EUT Information

EUT Name:	Eagle-M4
Order Number:	168460560 10
Model:	LXPS-M4422-79E-940B
Test Mode:	Camera ON
Test Voltage:	DC 24V
Test Standard:	EN IEC 61000-6-4
Test By:/Review By:	Guangshen Cen / Gary Chen
Tem./Hum./Pressure:	24.1°C/52.6%/101kPa
Remark:	3m chamber

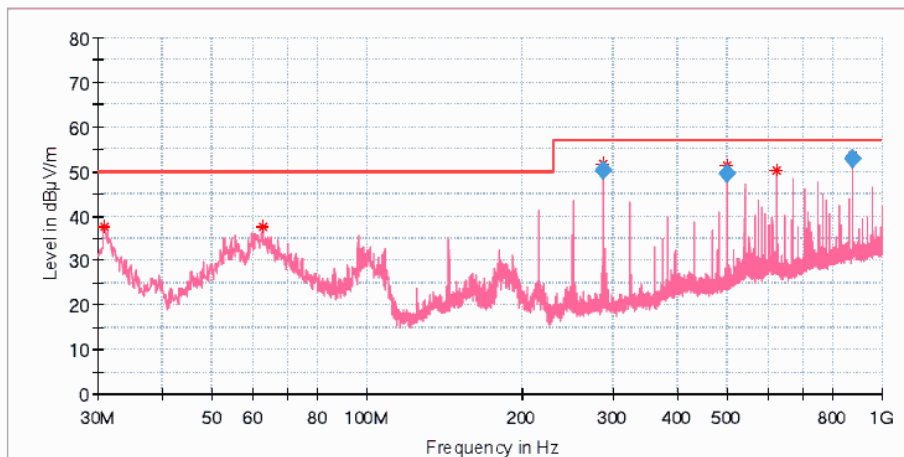

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.873000	37.54	50.00	12.46	100.0	V	166.0	18.7
62.689000	37.68	50.00	12.32	100.0	V	61.0	19.6
287.980000	51.57	57.00	5.43	200.0	V	312.0	21.3
499.965000	51.47	57.00	5.53	100.0	V	0.0	26.5
624.998000	50.36	57.00	6.64	100.0	V	319.0	29.7
874.927000	53.72	57.00	3.28	100.0	V	236.0	33.4


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
287.980000	50.08	57.00	6.92	1000.0	120.000	200.0	V	312.0	21.3
499.965000	49.53	57.00	7.47	1000.0	120.000	100.0	V	0.0	26.5
874.927000	52.74	57.00	4.26	1000.0	120.000	100.0	V	236.0	33.4

Test Report

EUT Information

EUT Name:	Eagle-M4
Order Number:	168460560 10
Model:	LXPS-M4422-79E-940B
Test Mode:	Camera ON
Test Voltage:	DC 24V
Test Standard:	EN IEC 61000-6-4
Test By:/Review By:	Guangshen Cen / Gary Chen
Tem./Hum./Pressure:	24.1°C/52.6%/101kPa
Remark:	3m chamber

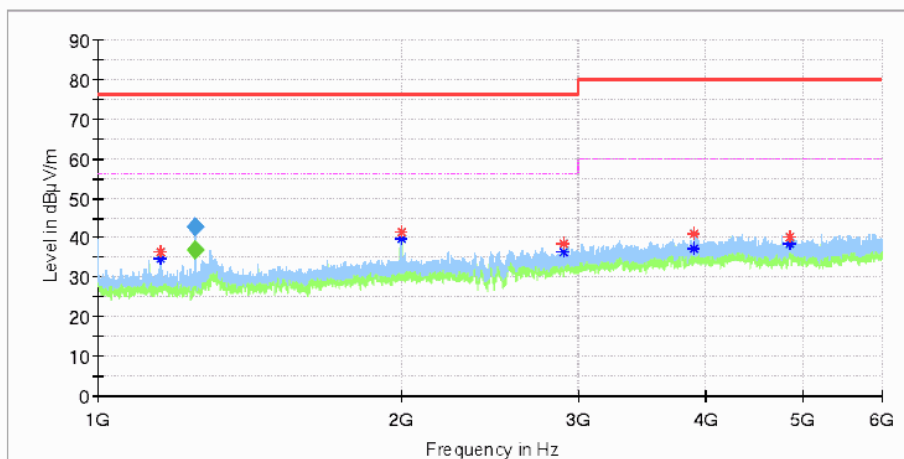

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1152.500000	---	34.86	56.00	21.14	100.0	H	70.0	-10.3
1152.500000	36.52	---	76.00	39.48	100.0	H	70.0	-10.3
1249.800000	42.57	---	76.00	33.43	100.0	H	125.0	-11.0
1249.800000	---	36.89	56.00	19.11	100.0	H	125.0	-11.0
2000.500000	---	39.77	56.00	16.23	100.0	H	114.0	-7.4
2000.500000	41.28	---	76.00	34.72	100.0	H	114.0	-7.4
2893.500000	---	36.30	56.00	19.70	100.0	H	217.0	-4.1
2893.500000	38.40	---	76.00	37.60	100.0	H	217.0	-4.1
3907.000000	---	37.34	60.00	22.66	100.0	H	282.0	-0.3
3907.000000	41.02	---	80.00	38.98	100.0	H	282.0	-0.3
4859.500000	---	38.57	60.00	21.43	100.0	H	0.0	1.4
4859.500000	40.15	---	80.00	39.85	100.0	H	0.0	1.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.800000	42.85	---	76.00	33.15	1000.0	1000.00	100.0	H	125.0	-11.0
1249.800000	---	36.94	56.00	19.06	1000.0	1000.00	100.0	H	125.0	-11.0

Test Report

EUT Information

EUT Name:	Eagle-M4
Order Number:	168460560 10
Model:	LXPS-M4422-79E-940B
Test Mode:	Camera ON
Test Voltage:	DC 24V
Test Standard:	EN IEC 61000-6-4
Test By:/Review By:	Guangshen Cen / Gary Chen
Tem./Hum./Pressure:	24.1°C/52.6%/101kPa
Remark:	3m chamber

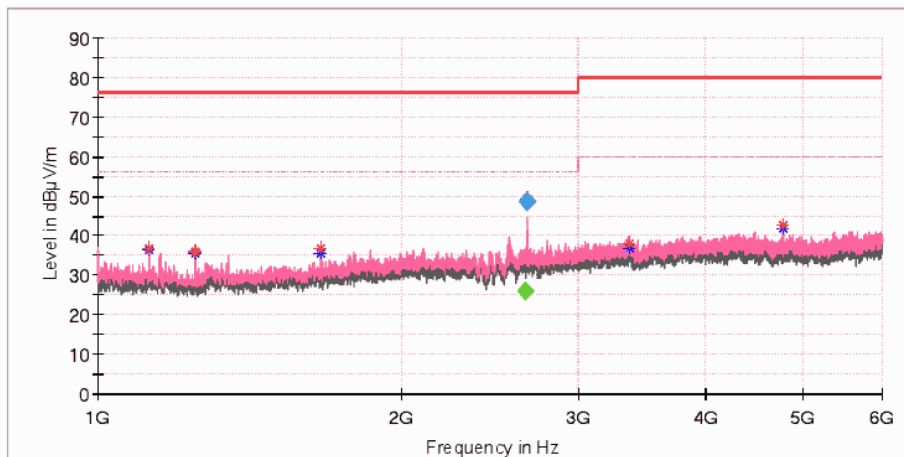

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000	---	36.28	56.00	19.72	100.0	V	136.0	-10.4
1125.000000	36.93	---	76.00	39.07	100.0	V	136.0	-10.4
1250.000000	---	35.47	56.00	20.53	100.0	V	98.0	-11.0
1250.000000	35.81	---	76.00	40.19	100.0	V	98.0	-11.0
1665.500000	---	35.62	56.00	20.38	100.0	V	115.0	-8.6
1665.500000	37.01	---	76.00	38.99	100.0	V	115.0	-8.6
2660.400000	---	26.52	56.00	29.48	100.0	V	152.0	-4.8
2666.400000	49.43	---	76.00	26.57	100.0	V	152.0	-4.8
3367.500000	---	36.79	60.00	23.21	100.0	V	185.0	-2.0
3367.500000	37.91	---	80.00	42.09	100.0	V	185.0	-2.0
4784.000000	---	41.77	60.00	18.23	100.0	V	180.0	0.5
4784.000000	42.88	---	80.00	37.12	100.0	V	180.0	0.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2660.400000	---	26.06	56.00	29.94	1000.0	1000.00	100.0	V	152.0	-4.7
2666.400000	48.54	---	76.00	27.46	1000.0	1000.00	100.0	V	152.0	-4.9

Measurement Uncertainties

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Table 1: Measurement Uncertainty levels

Test	Parameters	Expanded uncertainty (U_{lab})	Expanded uncertainty (U_{cisp})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 3.70 dB ± 3.30 dB	± 3.8 dB ± 3.4 dB
Disturbance Power	Level accuracy (30MHz to 300MHz)	± 4.27 dB	± 4.5 dB
Electromagnetic Radiated Emission (Triple-loop)	Level accuracy (9kHz to 30MHz)	± 2.67 dB	N/A
Radiated Emission (3m SAC)	Level accuracy (30MHz to 1000MHz)	± 4.52 dB	± 6.3 dB
	Level accuracy (above 1000MHz)	± 4.37 dB	N/A
Radiated Emission (10m SAC)	Level accuracy (30MHz to 1000MHz)	± 4.66 dB	± 6.3 dB
	Level accuracy (above 1000MHz)	± 4.35 dB	N/A
Mains Harmonic	Current	$\pm 4.60\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.64\%$	N/A

As U_{lab} in all applicable tests listed above are less than U_{cisp} according to CISPR 16-4-2:2011+A1:2014+A2:2018,

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.