

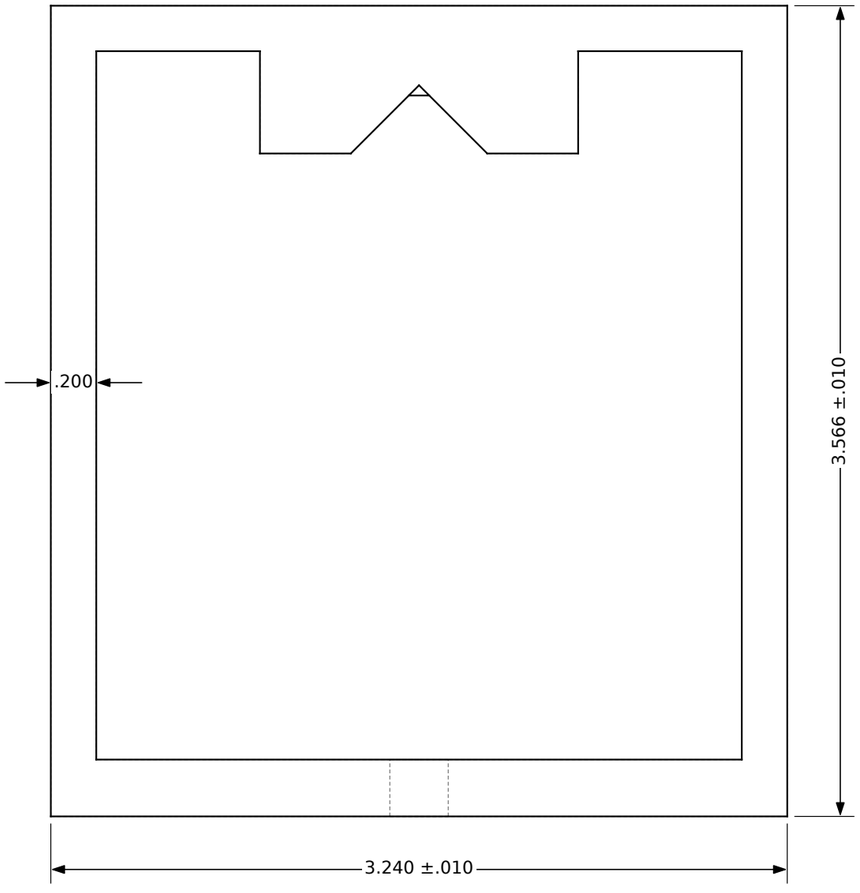


VIEW FROM FRONT (-X) 1.5:1

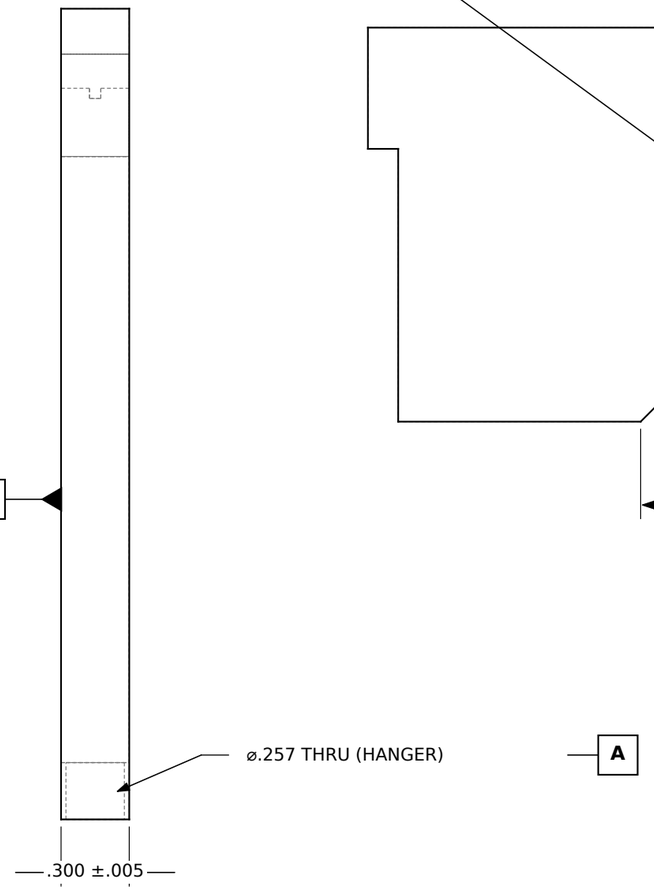

SIDE VIEW 1.5:1

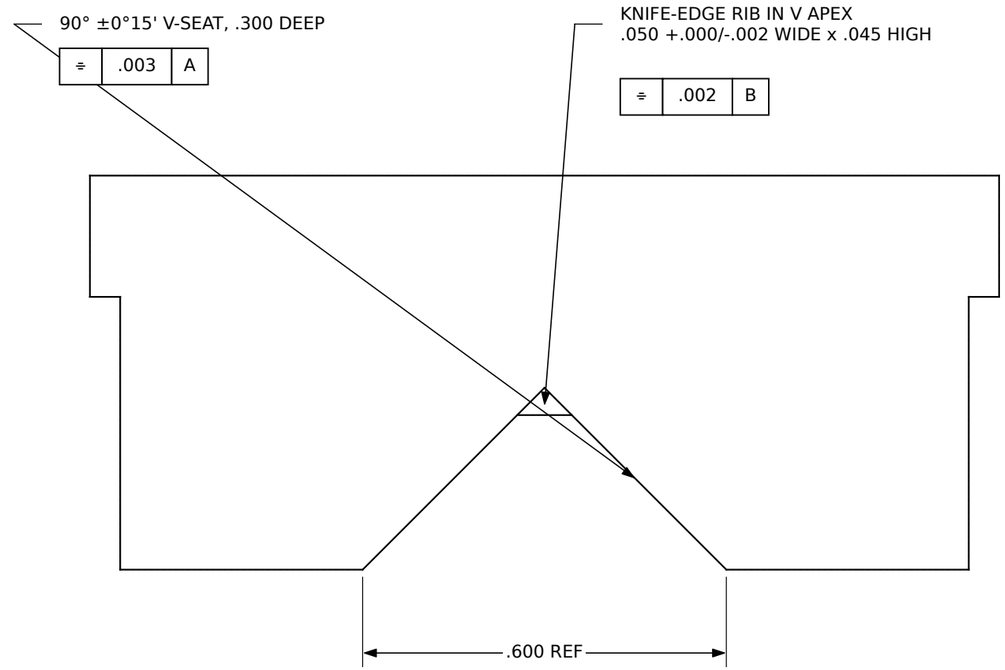

DETAIL E (V-SEAT) 4:1

NOTES:

1. PROFILE: WATERJET OR MILL FROM .300 PLATE, THEN MILL THE V-SEAT AND THE KNIFE-EDGE RIB IN ONE SETUP.
2. SITS ON THE UPPER CORNER OF THE SLEEVE (WT-6C-301) AT ROLL 45 / 135 / 315 DEG; THE RIB DROPS INTO THE .060 CORNER GROOVE AT THE STATION. HANGER LOAD LINE PASSES THROUGH THE V APEX AND THE BALANCE AXIS (NO ROLLING MOMENT).
3. V-SEAT FACES Ra 32 µin, NO BURRS; RIB EDGES BROKEN .005 MAX.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03 .XX ±.010

.XXX ±.005 .XXXX ±.0005

ANGLES ±0°30'

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 µin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **STIRRUP, 45 DEG CALIBRATION**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM, .300 PLATE				FINISH: CLEAR ANODIZE TYPE II	
DWG NO.: **WT-6C-303**	REV: **A**	SIZE: B	SCALE: 1.5:1 / 4:1	WEIGHT: 0.09 lb	SHEET: 16 OF 35