


FRONT VIEW 1:2.5

HOLE TABLE - ALL ⌀.266 THRU; POSITION ⌀.010 A B (BASIC DIMS)

HOLES	WALL	FROM B (X)	FROM A (Z)	PURPOSE
H1-H4	SIDE WALLS THRU	29.000	.450 / 1.050	THRUST UPRIGHT
H5-H8	SIDE WALLS THRU	15.500	.450 / 1.050	DRAG UPRIGHT
H9-H12	SIDE WALLS THRU	5.550	.450 / 1.050	HEAD PLATE (NEW)
H13-H16	SIDE WALLS THRU	2.700	.450 / 1.050	HEAD PLATE (NEW)
H17	TOP WALL	5.300	-	3-COMP FOOT BLOCK (OPTIONAL)
H18	TOP WALL	2.300	-	3-COMP FOOT BLOCK (OPTIONAL)

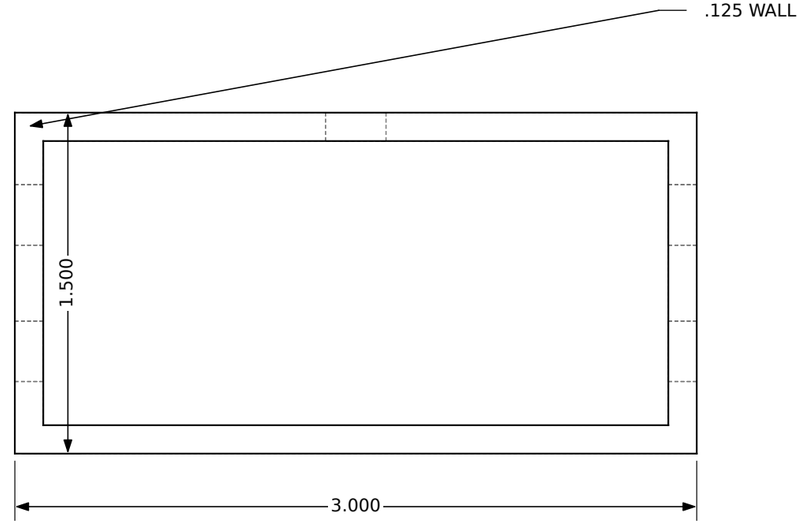

END VIEW 1.5:1

NOTES:

1. CUT TO LENGTH, ENDS SQUARE .005. ALL HOLES Ø.266 (1/4 BOLTS). SIDE-WALL HOLES DRILLED THROUGH BOTH WALLS IN ONE PASS.
2. HOLE TABLE DIMENSIONS FROM THE AFT END (DATUM B) AND THE BOTTOM FACE (DATUM A).
3. PULLEY UPRIGHT HOLES (DRAG x = 7.0, THRUST x = -6.5 FROM THE BMC) ARE UNCHANGED FROM THE 3-COMPONENT STAND; HEAD-PLATE HOLES ARE NEW FOR THE 6-COMPONENT HEAD.
4. CLAMP TO THE BENCH WITH 4 C-CLAMPS OR BOLT THROUGH THE BOTTOM WALL; LEVEL THE TOP WITHIN .02 DEG.

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **TUBE, BASE, CALIBRATION STAND**				CHECKED	APPROVED
MATERIAL: 6061-T6 RECT. TUBE 3.00 x 1.50 x .125 WALL				FINISH: AS SUPPLIED; DEBURR	
DWG NO.: **WT-6C-307**	REV: **A**	SIZE: B	SCALE: 1:2.5 / 1.5:1	WEIGHT: 3.20 lb	SHEET: 20 OF 35