




DATUM A = FACE AGAINST THE BASE TUBE (.375 PLATE)

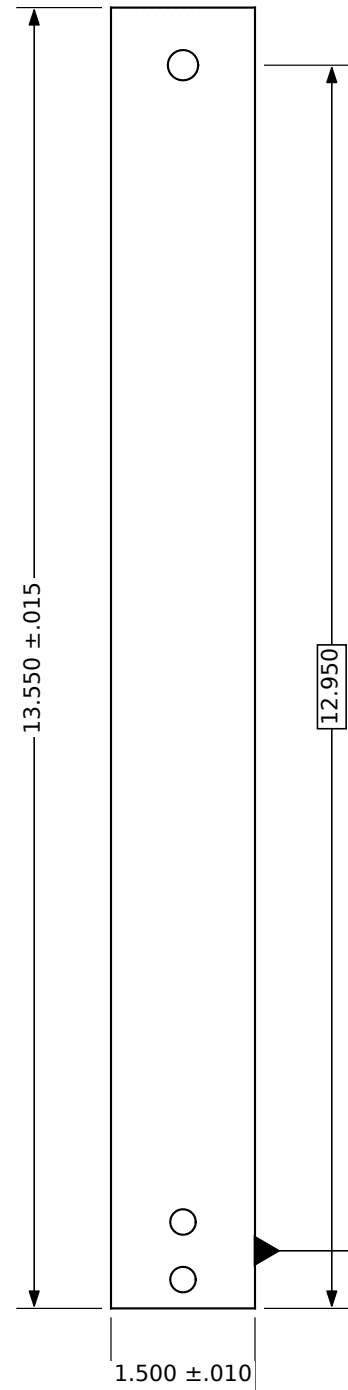

FRONT VIEW 1:2

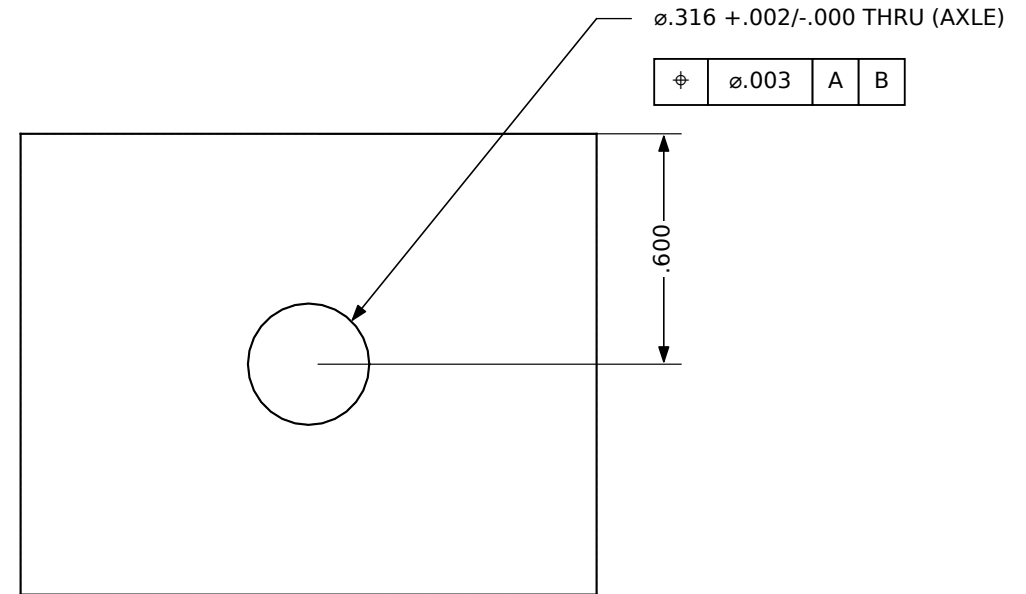

DETAIL A (TOP) 2:1

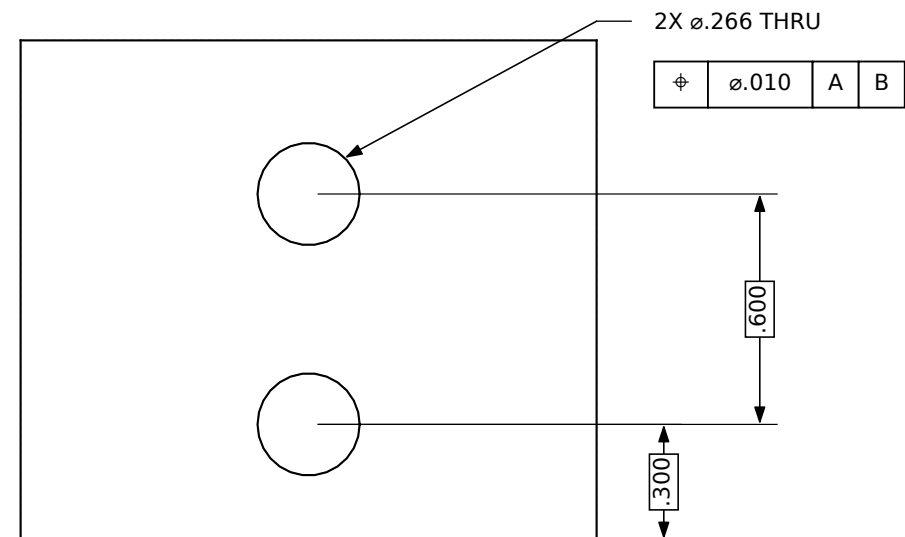

DETAIL B (BOTTOM) 2:1

NOTES:

1. QTY 4, IDENTICAL: 2 FOR THE DRAG AXLE (X = +7.0 FROM THE BMC), 2 FOR THE THRUST AXLE (X = -6.5).
2. BOLTS TO THE BASE-TUBE SIDE WALLS (WT-6C-307) WITH 2X 1/4-20 SHCS + NUTS.
3. THE AXLE HOLE HEIGHT SETS THE CABLE LINE ON THE BALANCE AXIS: KEEP 12.950 BASIC FROM THE BOTTOM EDGE.
4. MACHINE ALL FOUR STACKED SO THE AXLE HOLES LINE UP.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03	.XX ±.010
---------	-----------

.XXX ±.005 .XXXX ±.0005


ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 μin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-300 CALIBRATION ASSY

PROJECT					DRAWN / DATE		
Wind tunnel - motorized 6-component sting balance					Claude (AI-generated) 2026-10-02		
TITLE					CHECKED		APPROVED
UPRIGHT, PULLEY (QTY 4)							
MATERIAL					FINISH		
6061-T6 ALUMINUM, .375 PLATE					CLEAR ANODIZE TYPE II		
DWG NO.			REV	SIZE	SCALE	WEIGHT	SHEET
WT-6C-308			A	B	1:2 / 2:1	0.74 lb	21 OF 35