


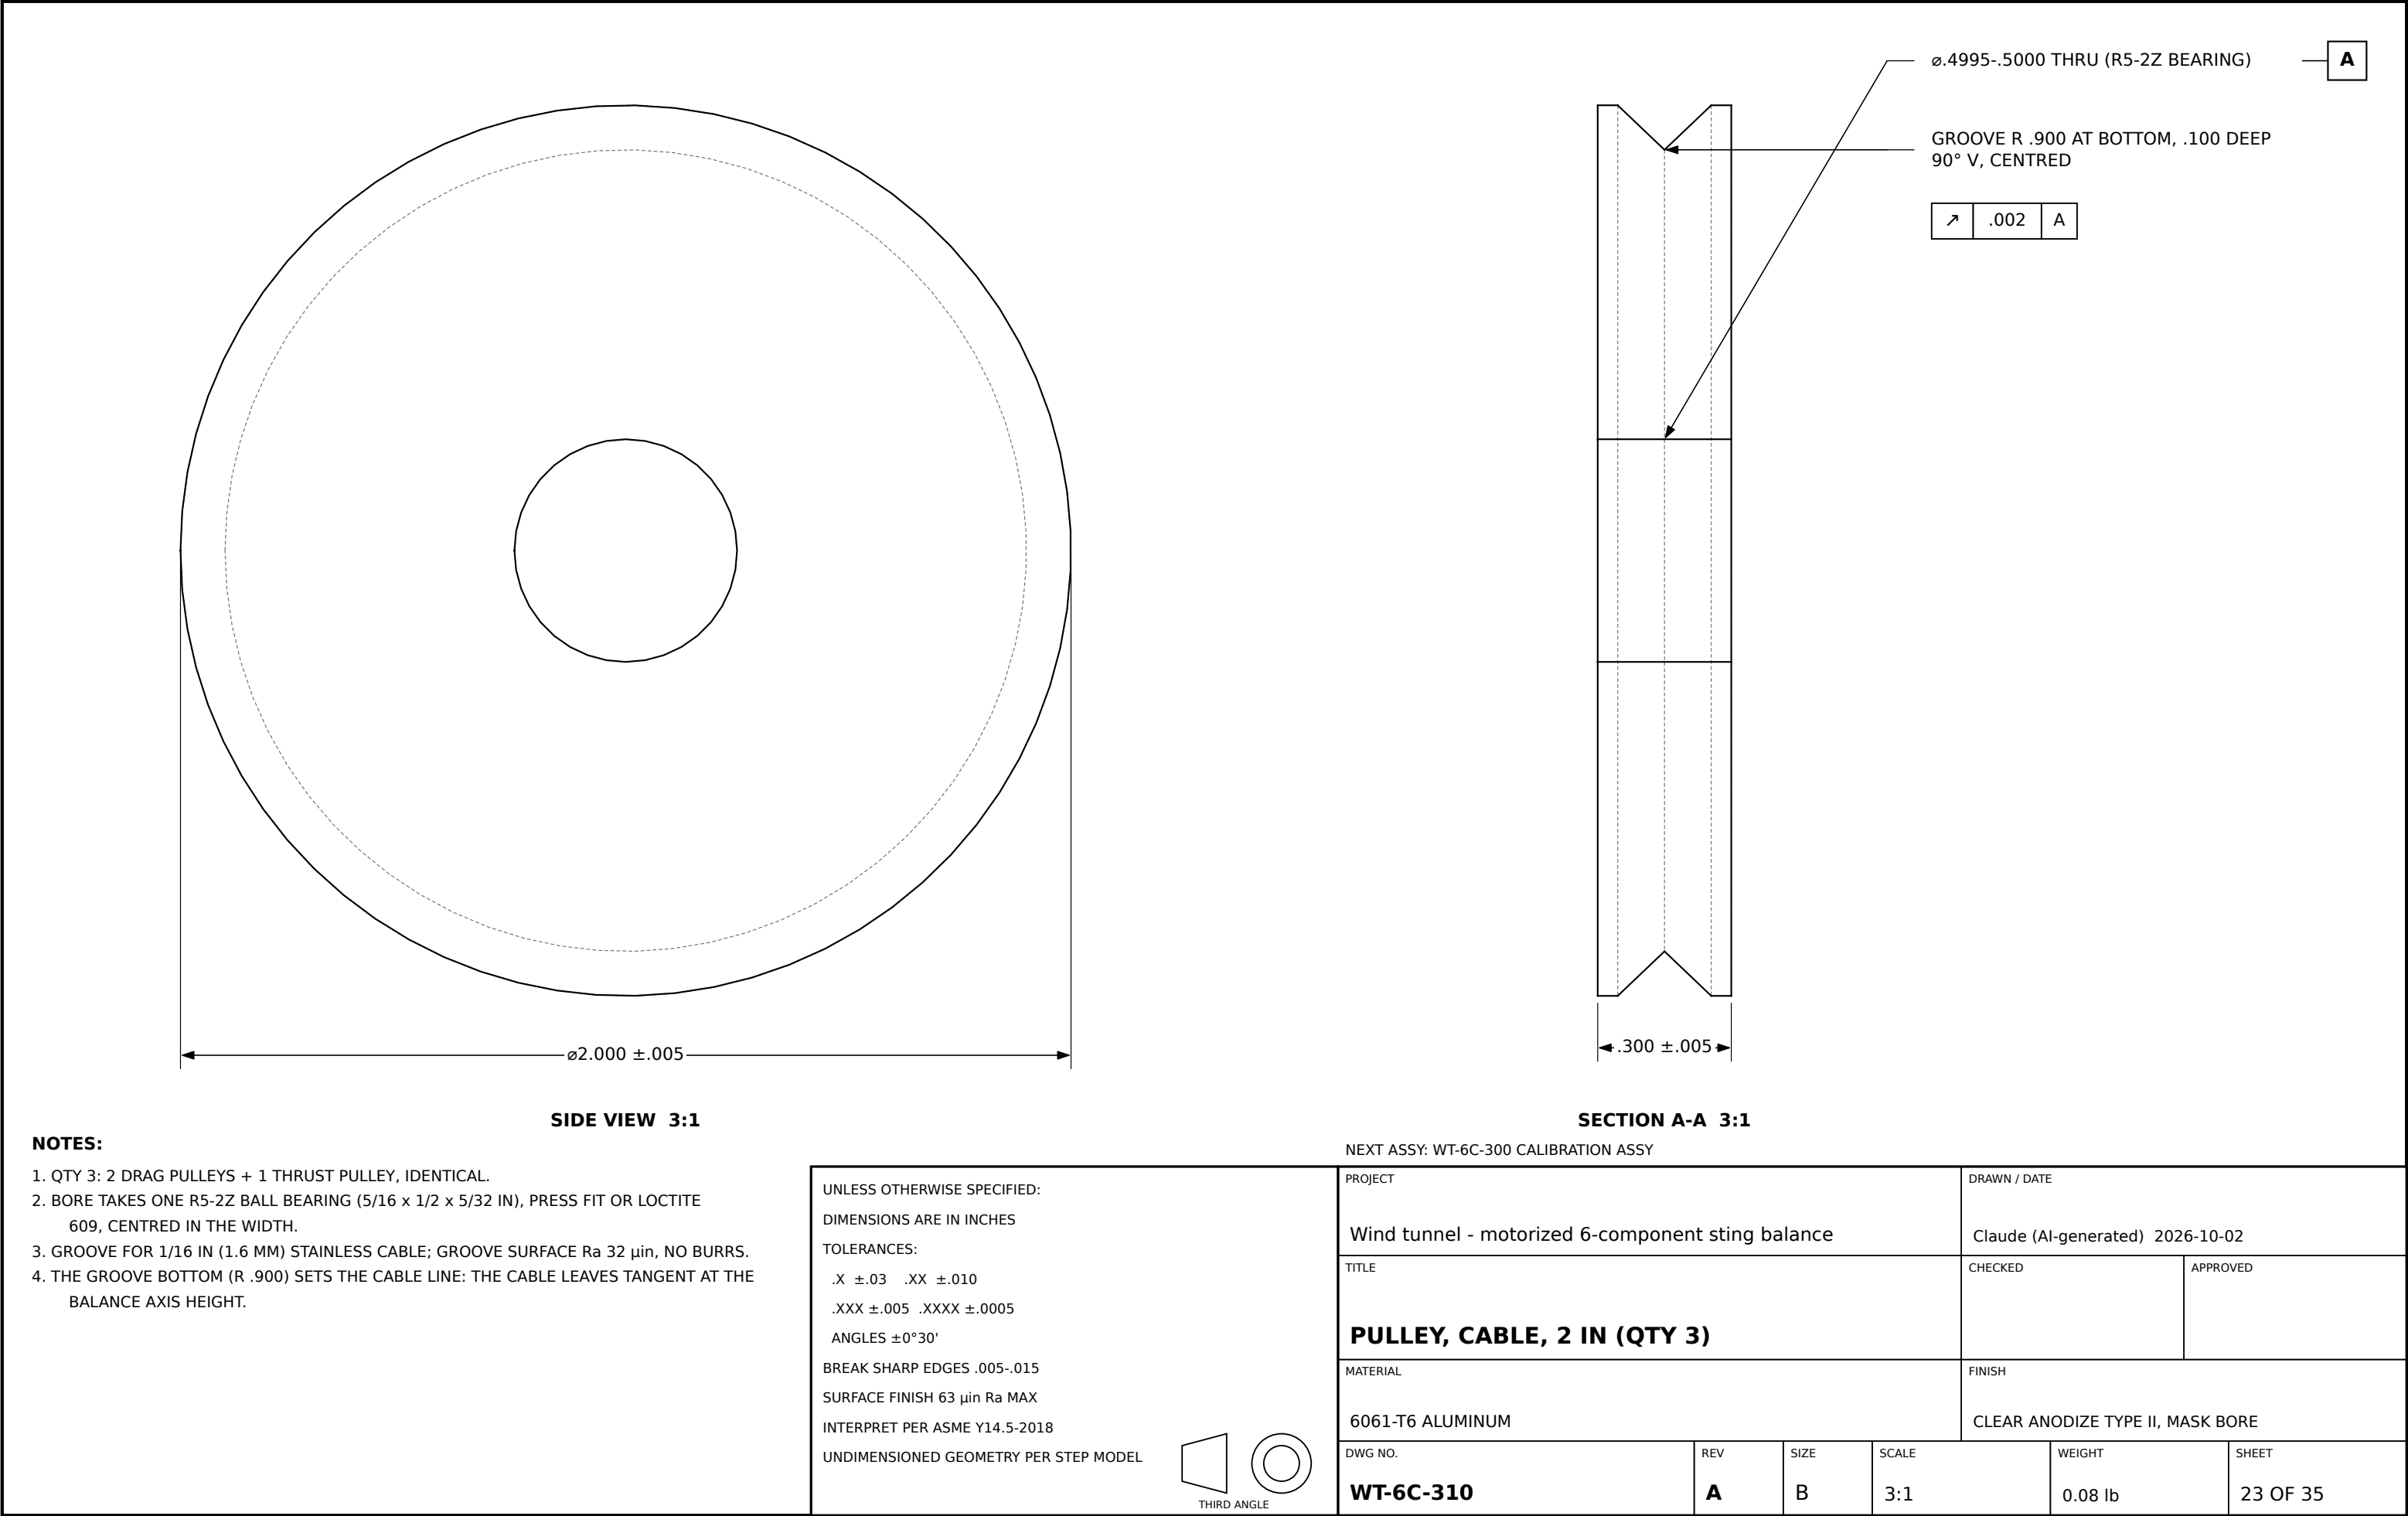

NOTES:

- QTY 3: 2 DRAG PULLEYS + 1 THRUST PULLEY, IDENTICAL.
- BORE TAKES ONE R5-2Z BALL BEARING (5/16 x 1/2 x 5/32 IN), PRESS FIT OR LOCTITE 609, CENTRED IN THE WIDTH.
- GROOVE FOR 1/16 IN (1.6 MM) STAINLESS CABLE; GROOVE SURFACE Ra 32 µin, NO BURRS.
- THE GROOVE BOTTOM (R .900) SETS THE CABLE LINE: THE CABLE LEAVES TANGENT AT THE BALANCE AXIS HEIGHT.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03 .XX ±.010

.XXX ±.005 .XXXX ±.0005


ANGLES ±0°30'

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 µin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-300 CALIBRATION ASSY

PROJECT				DRAWN / DATE			
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
TITLE				CHECKED		APPROVED	
PULLEY, CABLE, 2 IN (QTY 3)							
MATERIAL				FINISH			
6061-T6 ALUMINUM				CLEAR ANODIZE TYPE II, MASK BORE			
DWG NO.		REV	SIZE	SCALE		WEIGHT	SHEET
WT-6C-310		A	B	3:1		0.08 lb	23 OF 35