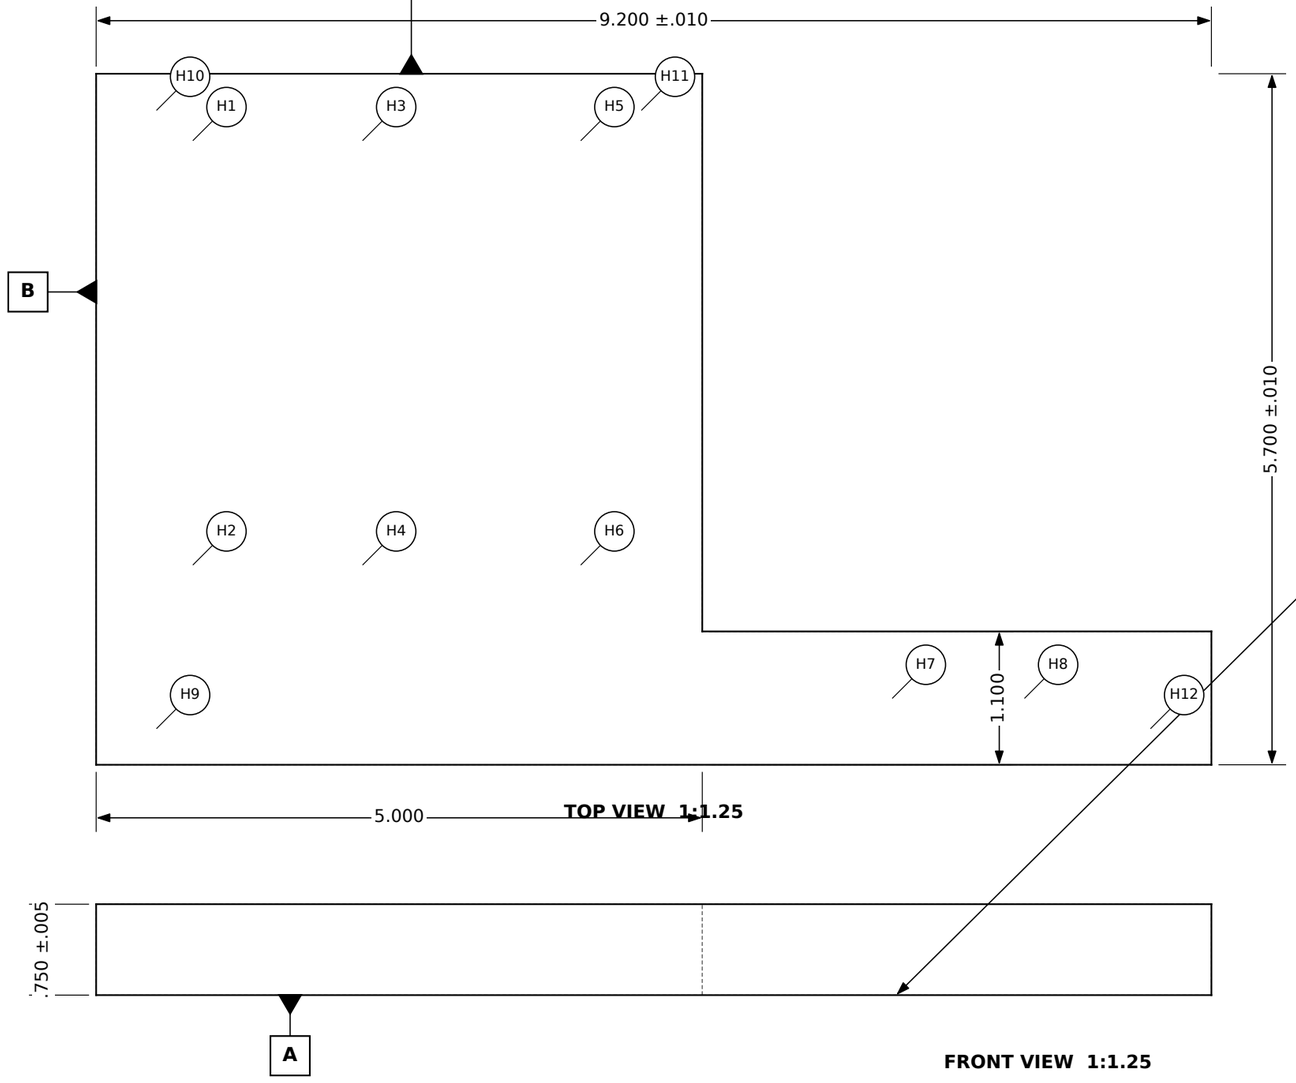



**HOLE TABLE (BASIC: X FROM B, Y FROM C) POSITION ⌀.010 A B C**

| HOLE | SIZE | X | Y |
|---|---|---|---|
| H1 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 0.800 | 0.550 |
| H2 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 0.800 | 4.050 |
| H3 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 2.200 | 0.550 |
| H4 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 2.200 | 4.050 |
| H5 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 4.000 | 0.550 |
| H6 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 4.000 | 4.050 |
| H7 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 6.569 | 5.150 |
| H8 | ⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM) | 7.660 | 5.150 |
| H9 | ⌀.406 THRU (CARRIAGE) | 0.500 | 5.400 |
| H10 | ⌀.406 THRU (CARRIAGE) | 0.500 | 0.300 |
| H11 | ⌀.406 THRU (CARRIAGE) | 4.500 | 0.300 |
| H12 | ⌀.406 THRU (CARRIAGE) | 8.700 | 5.400 |

**NOTES:**

1. DATUM A = BOTTOM FACE (SITS ON THE YAW CARRIAGE PLATE, WT-6C-504). FLAT .002 OVER THE PART.
2. CHEEK AND RACK-FOOT HOLES ARE COUNTERBORED FROM BELOW FOR 1/4-20 SHCS.
3. 4X Ø.406 HOLES TAKE 3/8-16 SHCS INTO THE YAW CARRIAGE PLATE.
4. NOTCH AFT OF X = 18.400: THE ROLL GEARBOX AND NEMA 23 SWING DOWN THROUGH IT AT HIGH PITCH - DO NOT ADD MATERIAL THERE.

NEXT ASSY: WT-6C-400 PITCH SECTOR ASSY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

| | | | | | |
|---|---|---|---|---|---|
| PROJECT: Wind tunnel - motorized 6-component sting balance | | | | DRAWN / DATE: Claude (AI-generated) 2026-10-02 | |
| TITLE: **PLATE, BASE, PITCH SECTOR** | | | | CHECKED | APPROVED |
| MATERIAL: 6061-T6 ALUMINUM, .750 PLATE | | | | FINISH: CLEAR ANODIZE TYPE II | |
| DWG NO.: **WT-6C-403** | REV: **A** | SIZE: B | SCALE: 1:1.25 | WEIGHT: 2.42 lb | SHEET: 26 OF 35 |