



87654321

GEAR DATA

MODULE	1.25 mm
TEETH	20
PRESSURE ANGLE	20°
PITCH DIA	25.00 mm (.984 in)
OUTSIDE DIA	27.50 mm
FACE WIDTH	.340 in (8.6 mm)
MATES	RACK WT-6C-402 (INTERNAL)
CENTRE RADIUS	21.508 in FROM THE BMC (BASIC)

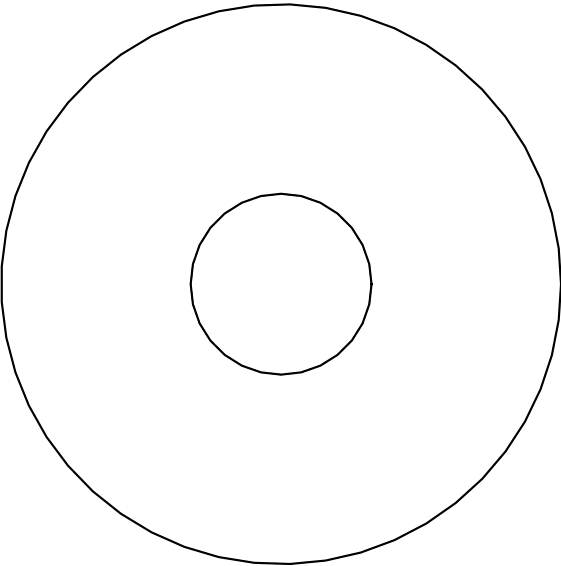

AXIAL VIEW 3:1

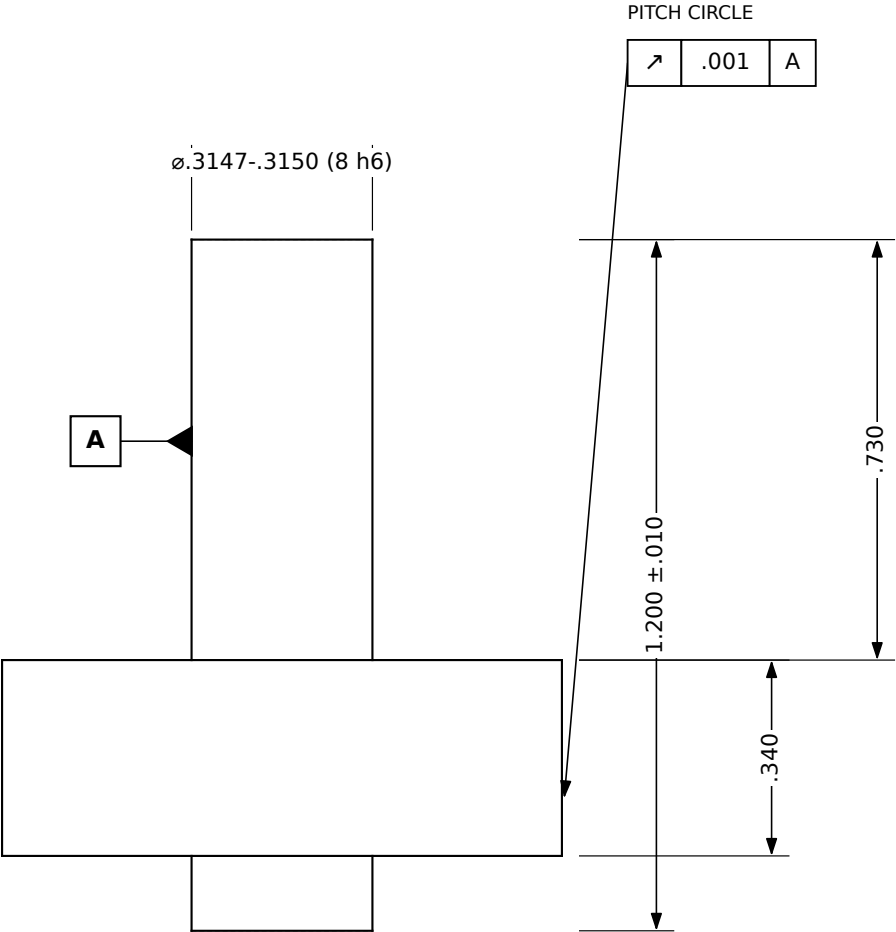

PITCH CIRCLE

Ø.3147-.3150 (8 h6)

1.200 ±.010

.730

.340

0.001 A

A

SIDE VIEW 3:1

NOTES:

1. GEAR: STOCK SPUR GEAR MODULE 1.25, 20 TEETH, 20 DEG PA, HUBLESS OR HUB REMOVED; FACE TRIMMED TO .340 (8.6 MM). BORE TO 8 H7 AND PIN TO THE SHAFT (1/16 OR 2 MM SPRING PIN) OR LOCTITE 648.

2. SHAFT: 8 h6 BEARING SEAT FOR 2X 608-2RS IN WT-6C-405; SHOULDER + EXTERNAL CIRCLIP DIN 471-8 RETAIN THE BEARINGS.

3. OUTPUT END: 8 h6 WITH A .5 MM DEEP D-FLAT INTO THE 40:1 WORM GEARMOTOR HOLLOW OUTPUT (OR A RIGID COUPLING) - CONFIRM WITH THE GEARMOTOR VENDOR DRAWING.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL



THIRD ANGLE

PROJECT

Wind tunnel - motorized 6-component sting balance

TITLE

PINION + SHAFT, PITCH DRIVE

MATERIAL

GEAR: STEEL, STOCK; SHAFT: 4140 OR 416 SS, GROUND

DWG NO.

WT-6C-406

DRAWN / DATE

Claude (AI-generated) 2026-10-02

CHECKED

APPROVED

FINISH

BLACK OXIDE (GEAR); SHAFT AS GROUND

REV

A

SIZE

B

SCALE

3:1

WEIGHT

0.09 lb

SHEET

29 OF 35

87654321

87654321