
ø.8740-.8750 | A (FULL LENGTH) | — ø.002

FRONT VIEW 3:4

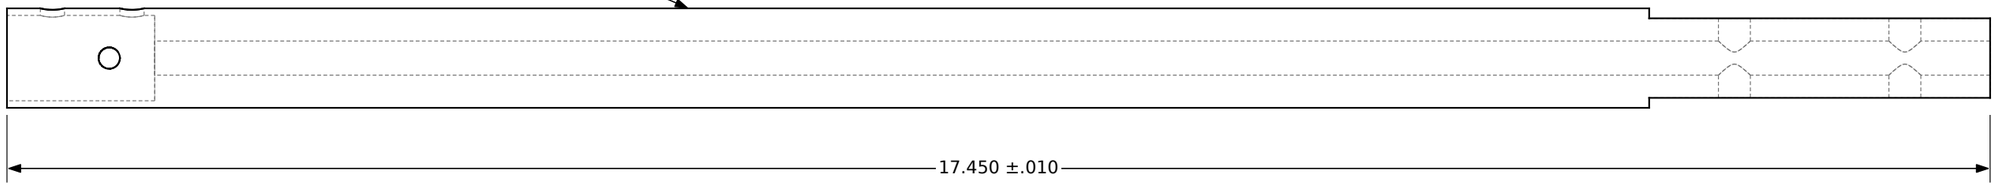


ø.7510 +.0005/-.0000 ⌄1.30

↗ .001 A

ø.1875 +.0005/-.0000 THRU

⌖ ø.001 A


2X 1/4-28 UNF-2B THRU WALL

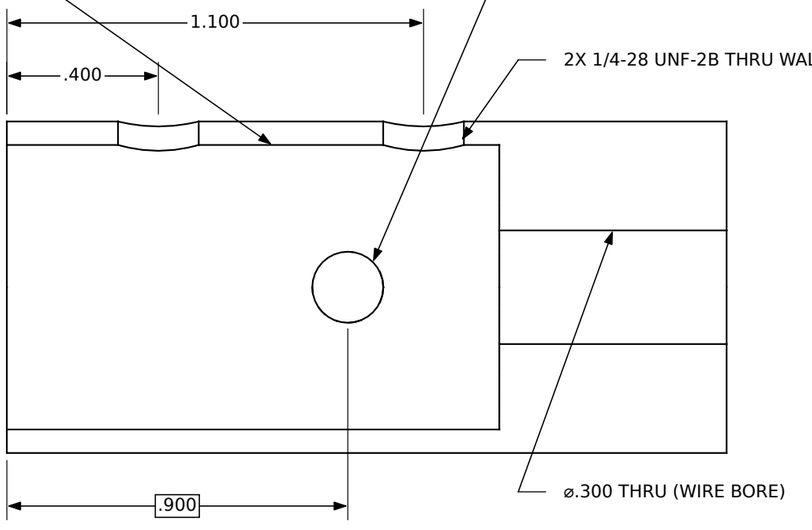

SECTION / DETAIL B 2.5:1

2X ø.281 THRU


⌖ ø.005 A D

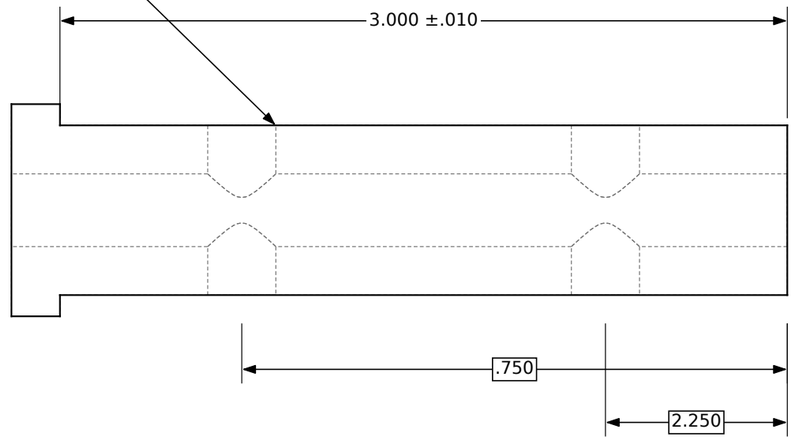

DETAIL C 1.6:1

⌖ .001 A

‖ .0005 D

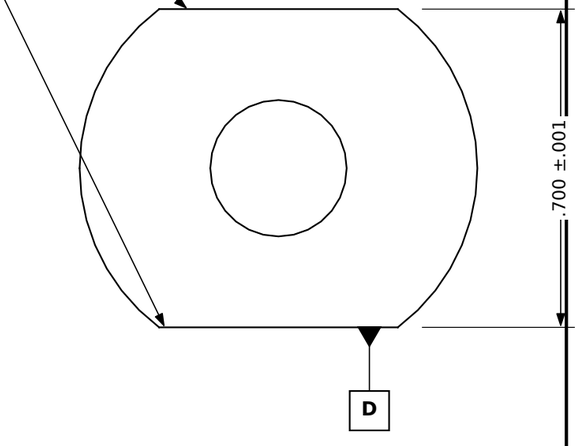

SECTION D-D 3:1

NOTES:

1. STRAIGHTEN BEFORE FINISH GRINDING. OD Ra 16 µin.
2. SOCKET MATES THE BALANCE SPIGOT (WT-6C-001); CROSS PIN AND SET SCREWS CARRY ROLL AND AXIAL LOAD.
3. FLATS AND 2X HOLES MATE THE ROLL SPINDLE D-D BORE (WT-6C-201); THE FLATS ARE THE ROLL DRIVE.
4. WIRE BORE: DEBURR BOTH ENDS AND ALL CROSS HOLES SMOOTH - NO SHARP EDGES ON THE GAUGE WIRES.

NEXT ASSY: WT-6C-100 FLIGHT ASSY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **STING**				CHECKED	APPROVED
MATERIAL: 4140 STEEL, PRE-HARDENED 28-32 HRC				FINISH: BLACK OXIDE; OD GROUND	
DWG NO.: **WT-6C-003**	REV: **A**	SIZE: B	SCALE: 3:4 (SEE VIEWS)	WEIGHT: 2.42 lb	SHEET: 8 OF 36