
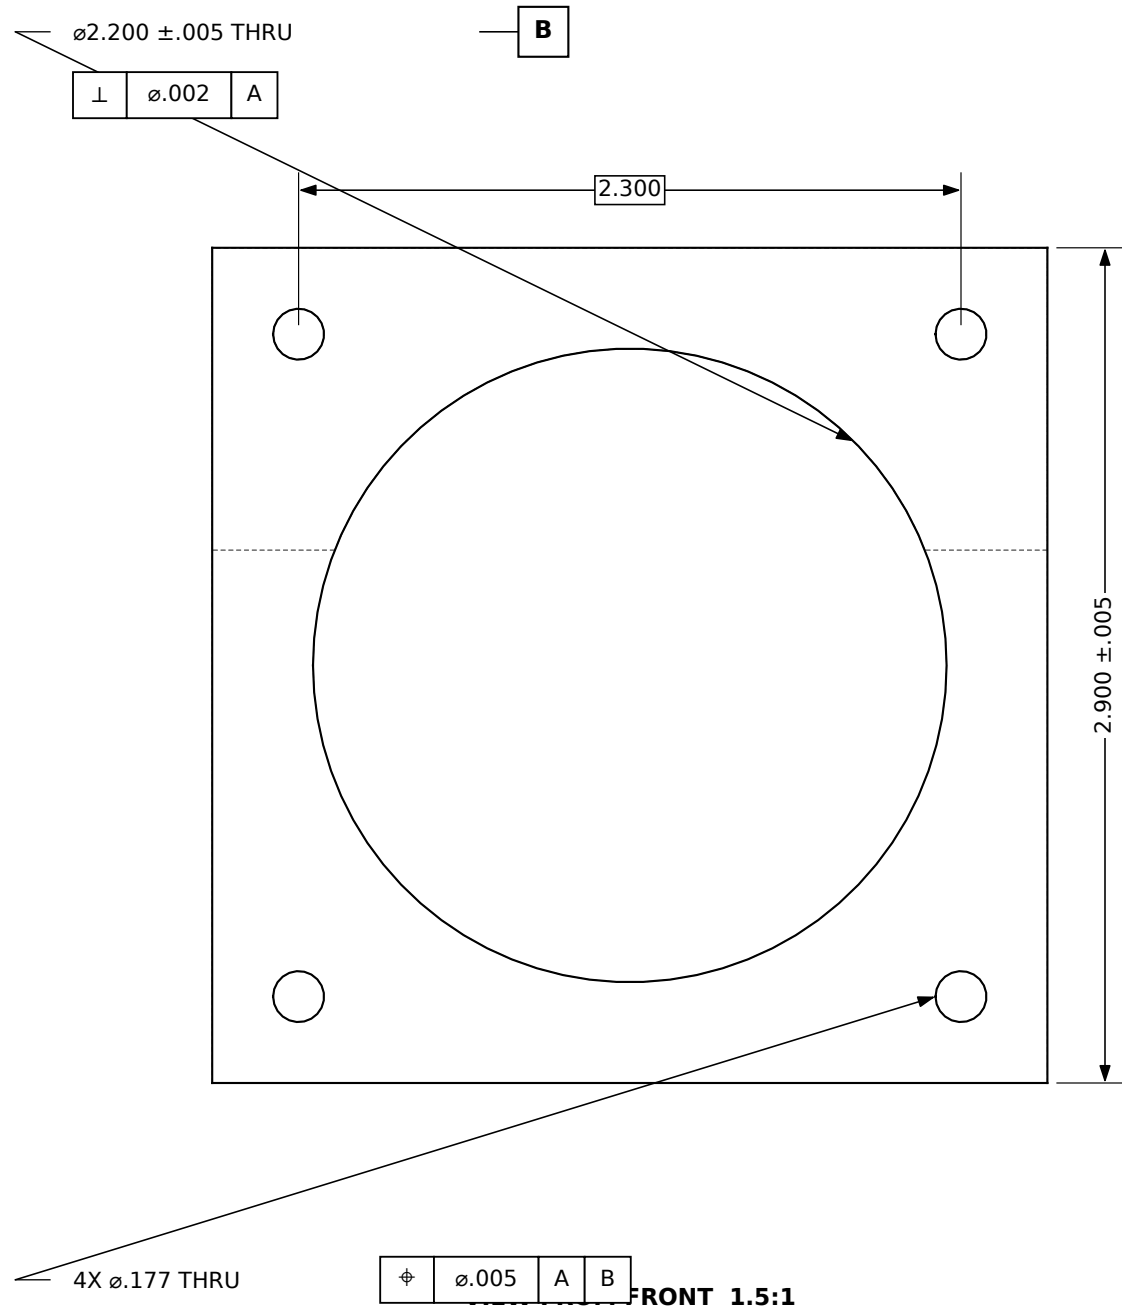


FRONT VIEW 1.5:1

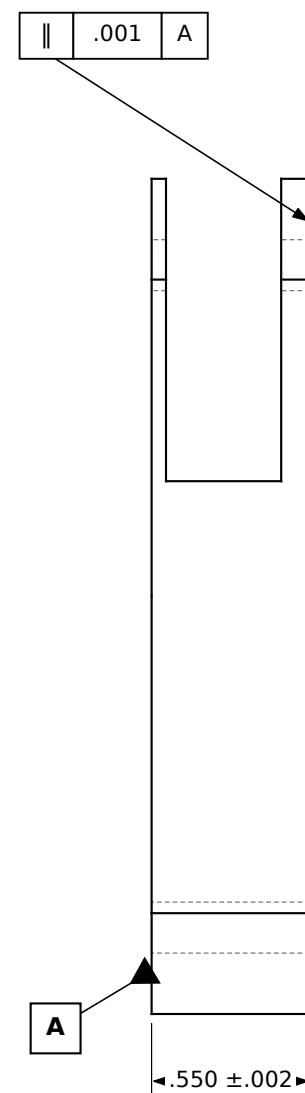

SECTION A-A 1.5:1

NOTES:

1. AFT FACE: DRILL AND TAP TO SUIT THE NMRV030 OUTPUT-FLANGE PATTERN FROM THE VENDOR DRAWING; LOCATE ON DATUM B SO THE GEARBOX OUTPUT IS COAXIAL WITH THE SPINDLE WITHIN .002.
2. WIRE WINDOW LETS THE SPINDLE WIRE EXIT SWEEP +-90 DEG OF ROLL; DEBURR SMOOTH.
3. DATUM A = FACE AGAINST THE REAR CAP. DATUM B = BORE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X $\pm$.03	.XX $\pm$.010
--------------	----------------

.XXX ±.005 .XXXX ±.0005


ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 μin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-200 ROLL SPINDLE ASSY

PROJECT				DRAWN / DATE		
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02		
TITLE				CHECKED		APPROVED
ADAPTER, GEARBOX						
MATERIAL				FINISH		
6061-T6 ALUMINUM				CLEAR ANODIZE TYPE II		
DWG NO.	REV	SIZE	SCALE	WEIGHT		SHEET
WT-6C-204	A	B	1.5:1	0.17 lb		13 OF 36