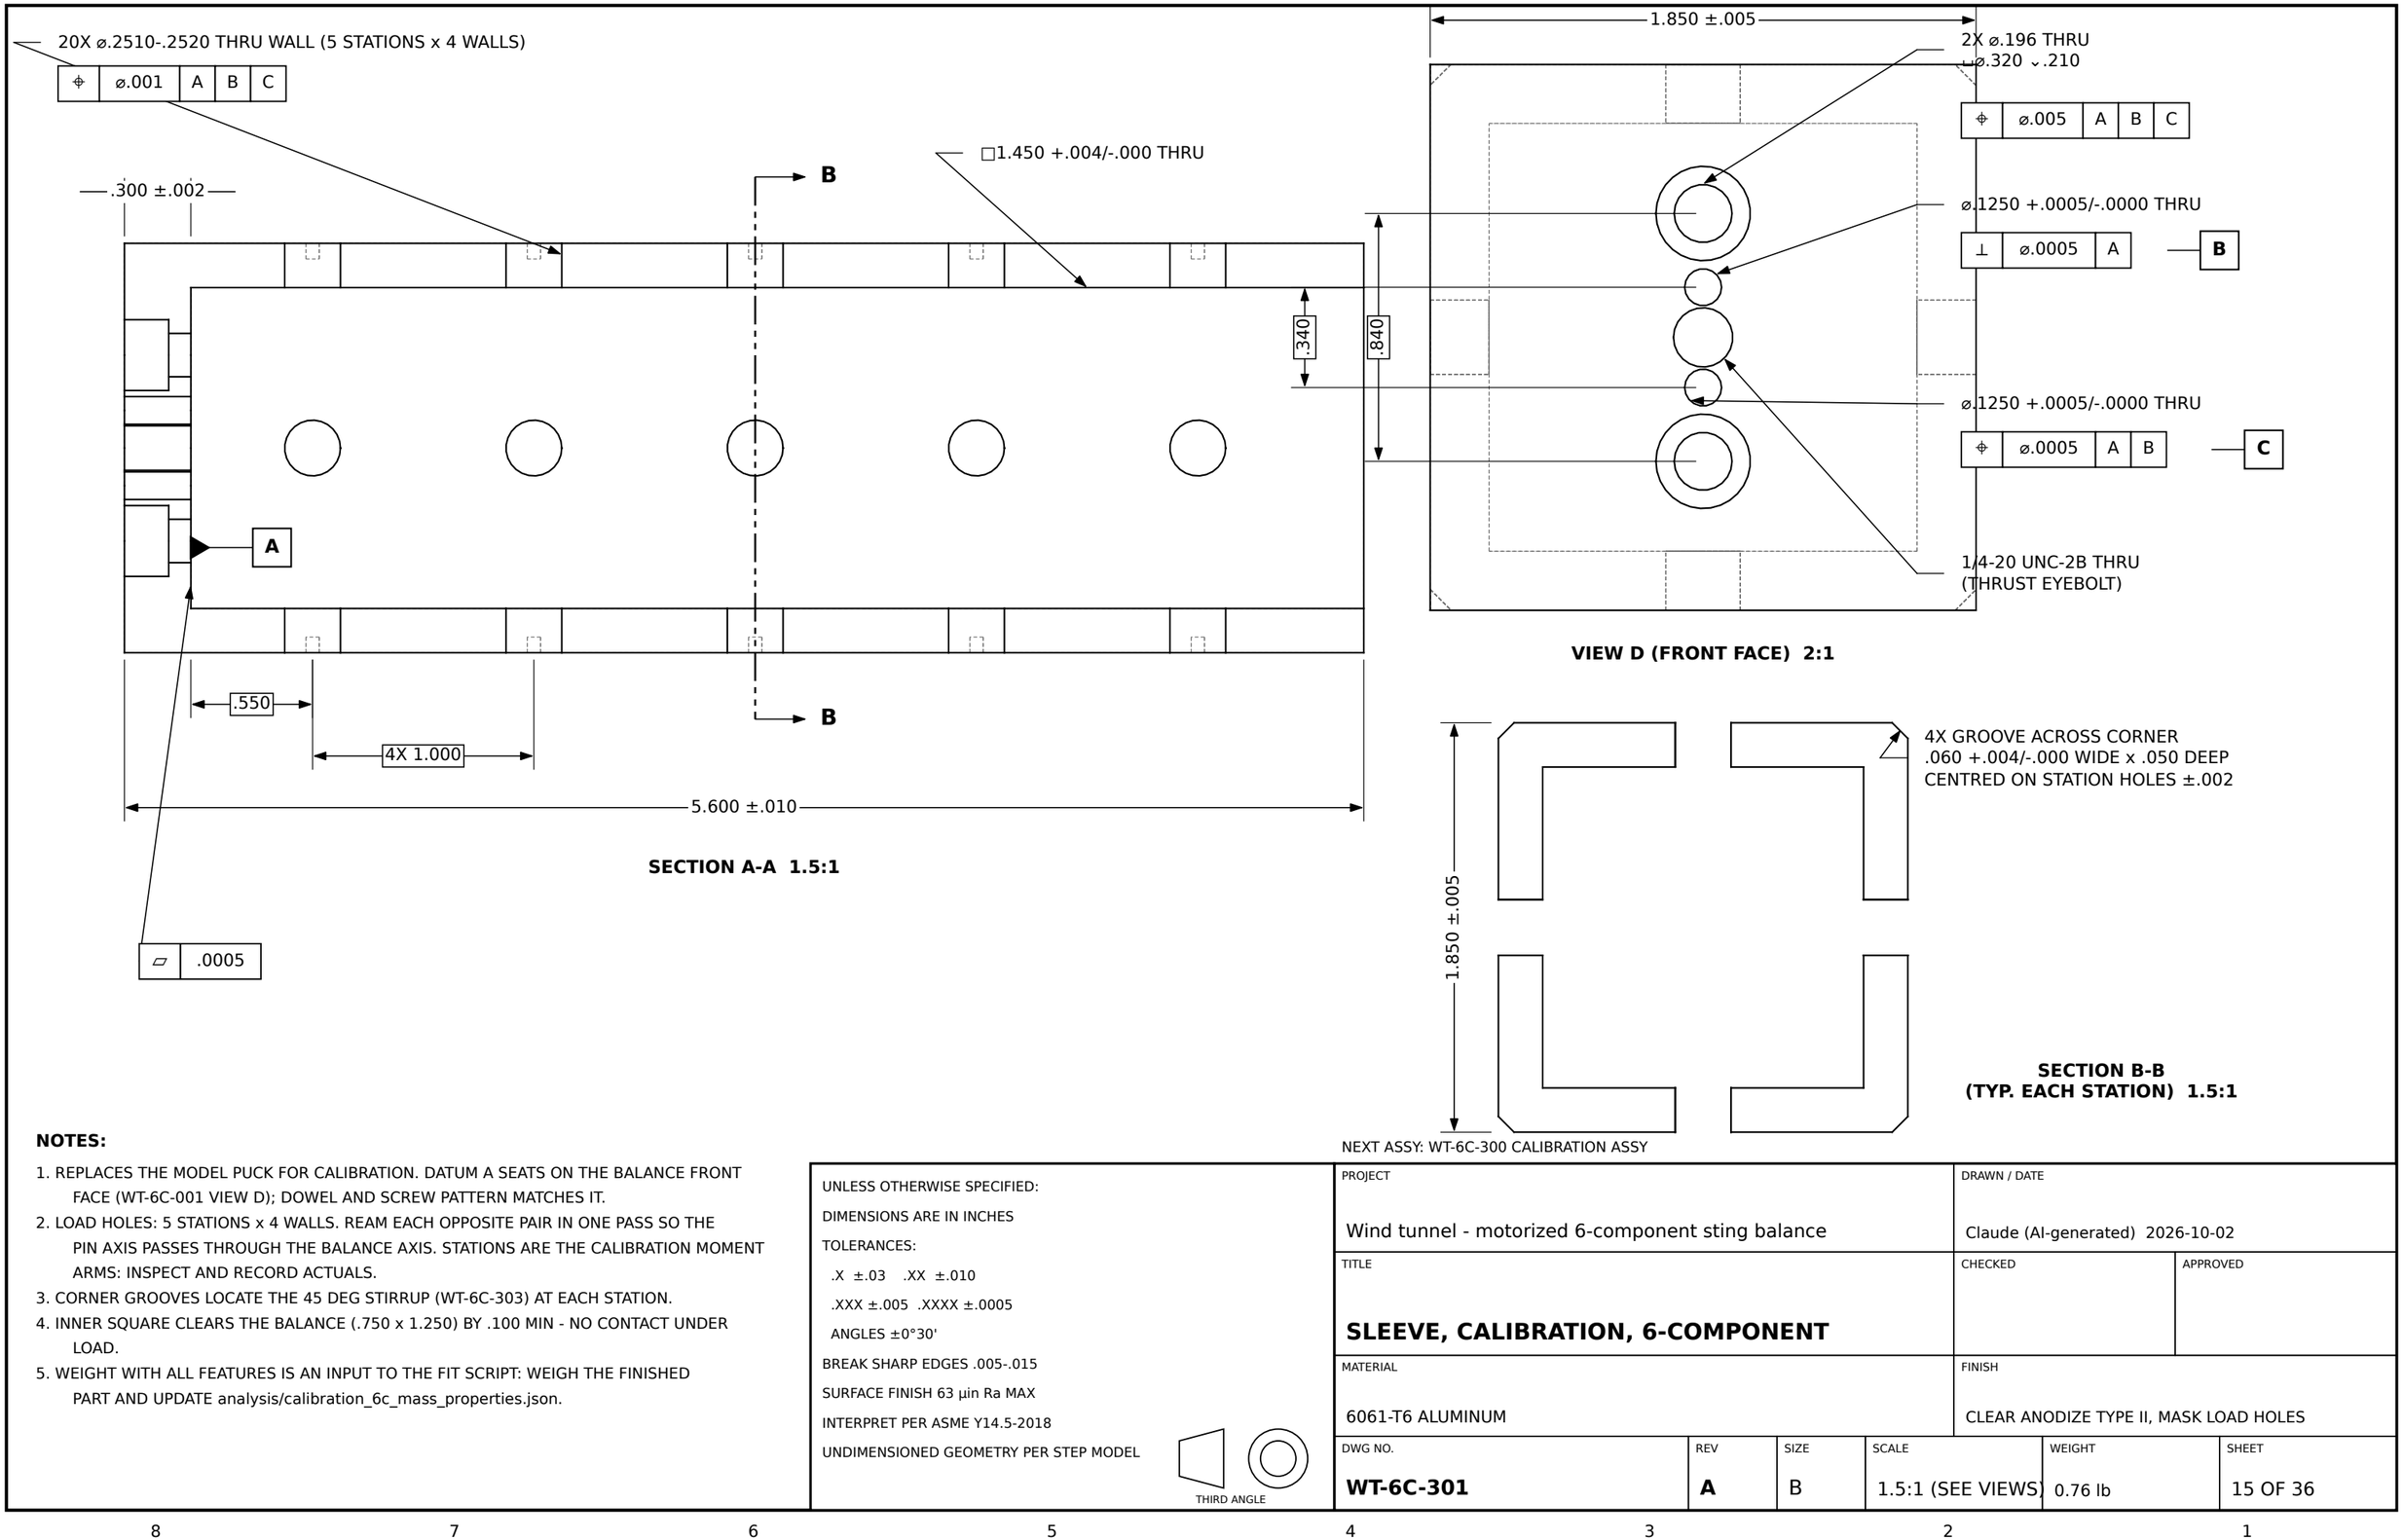


SECTION A-A 1.5:1

VIEW D (FRONT FACE) 2:1

SECTION B-B
(TYP. EACH STATION) 1.5:1

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

NOTES:

1. REPLACES THE MODEL PUCK FOR CALIBRATION. DATUM A SEATS ON THE BALANCE FRONT FACE (WT-6C-001 VIEW D); DOWEL AND SCREW PATTERN MATCHES IT.
2. LOAD HOLES: 5 STATIONS x 4 WALLS. REAM EACH OPPOSITE PAIR IN ONE PASS SO THE PIN AXIS PASSES THROUGH THE BALANCE AXIS. STATIONS ARE THE CALIBRATION MOMENT ARMS: INSPECT AND RECORD ACTUALS.
3. CORNER GROOVES LOCATE THE 45 DEG STIRRUP (WT-6C-303) AT EACH STATION.
4. INNER SQUARE CLEARS THE BALANCE (.750 x 1.250) BY .100 MIN - NO CONTACT UNDER LOAD.
5. WEIGHT WITH ALL FEATURES IS AN INPUT TO THE FIT SCRIPT: WEIGH THE FINISHED PART AND UPDATE analysis/calibration_6c_mass_properties.json.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **SLEEVE, CALIBRATION, 6-COMPONENT**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM				FINISH: CLEAR ANODIZE TYPE II, MASK LOAD HOLES	
DWG NO.: **WT-6C-301**	REV: **A**	SIZE: B	SCALE: 1.5:1 (SEE VIEWS)	WEIGHT: 0.76 lb	SHEET: 15 OF 36