


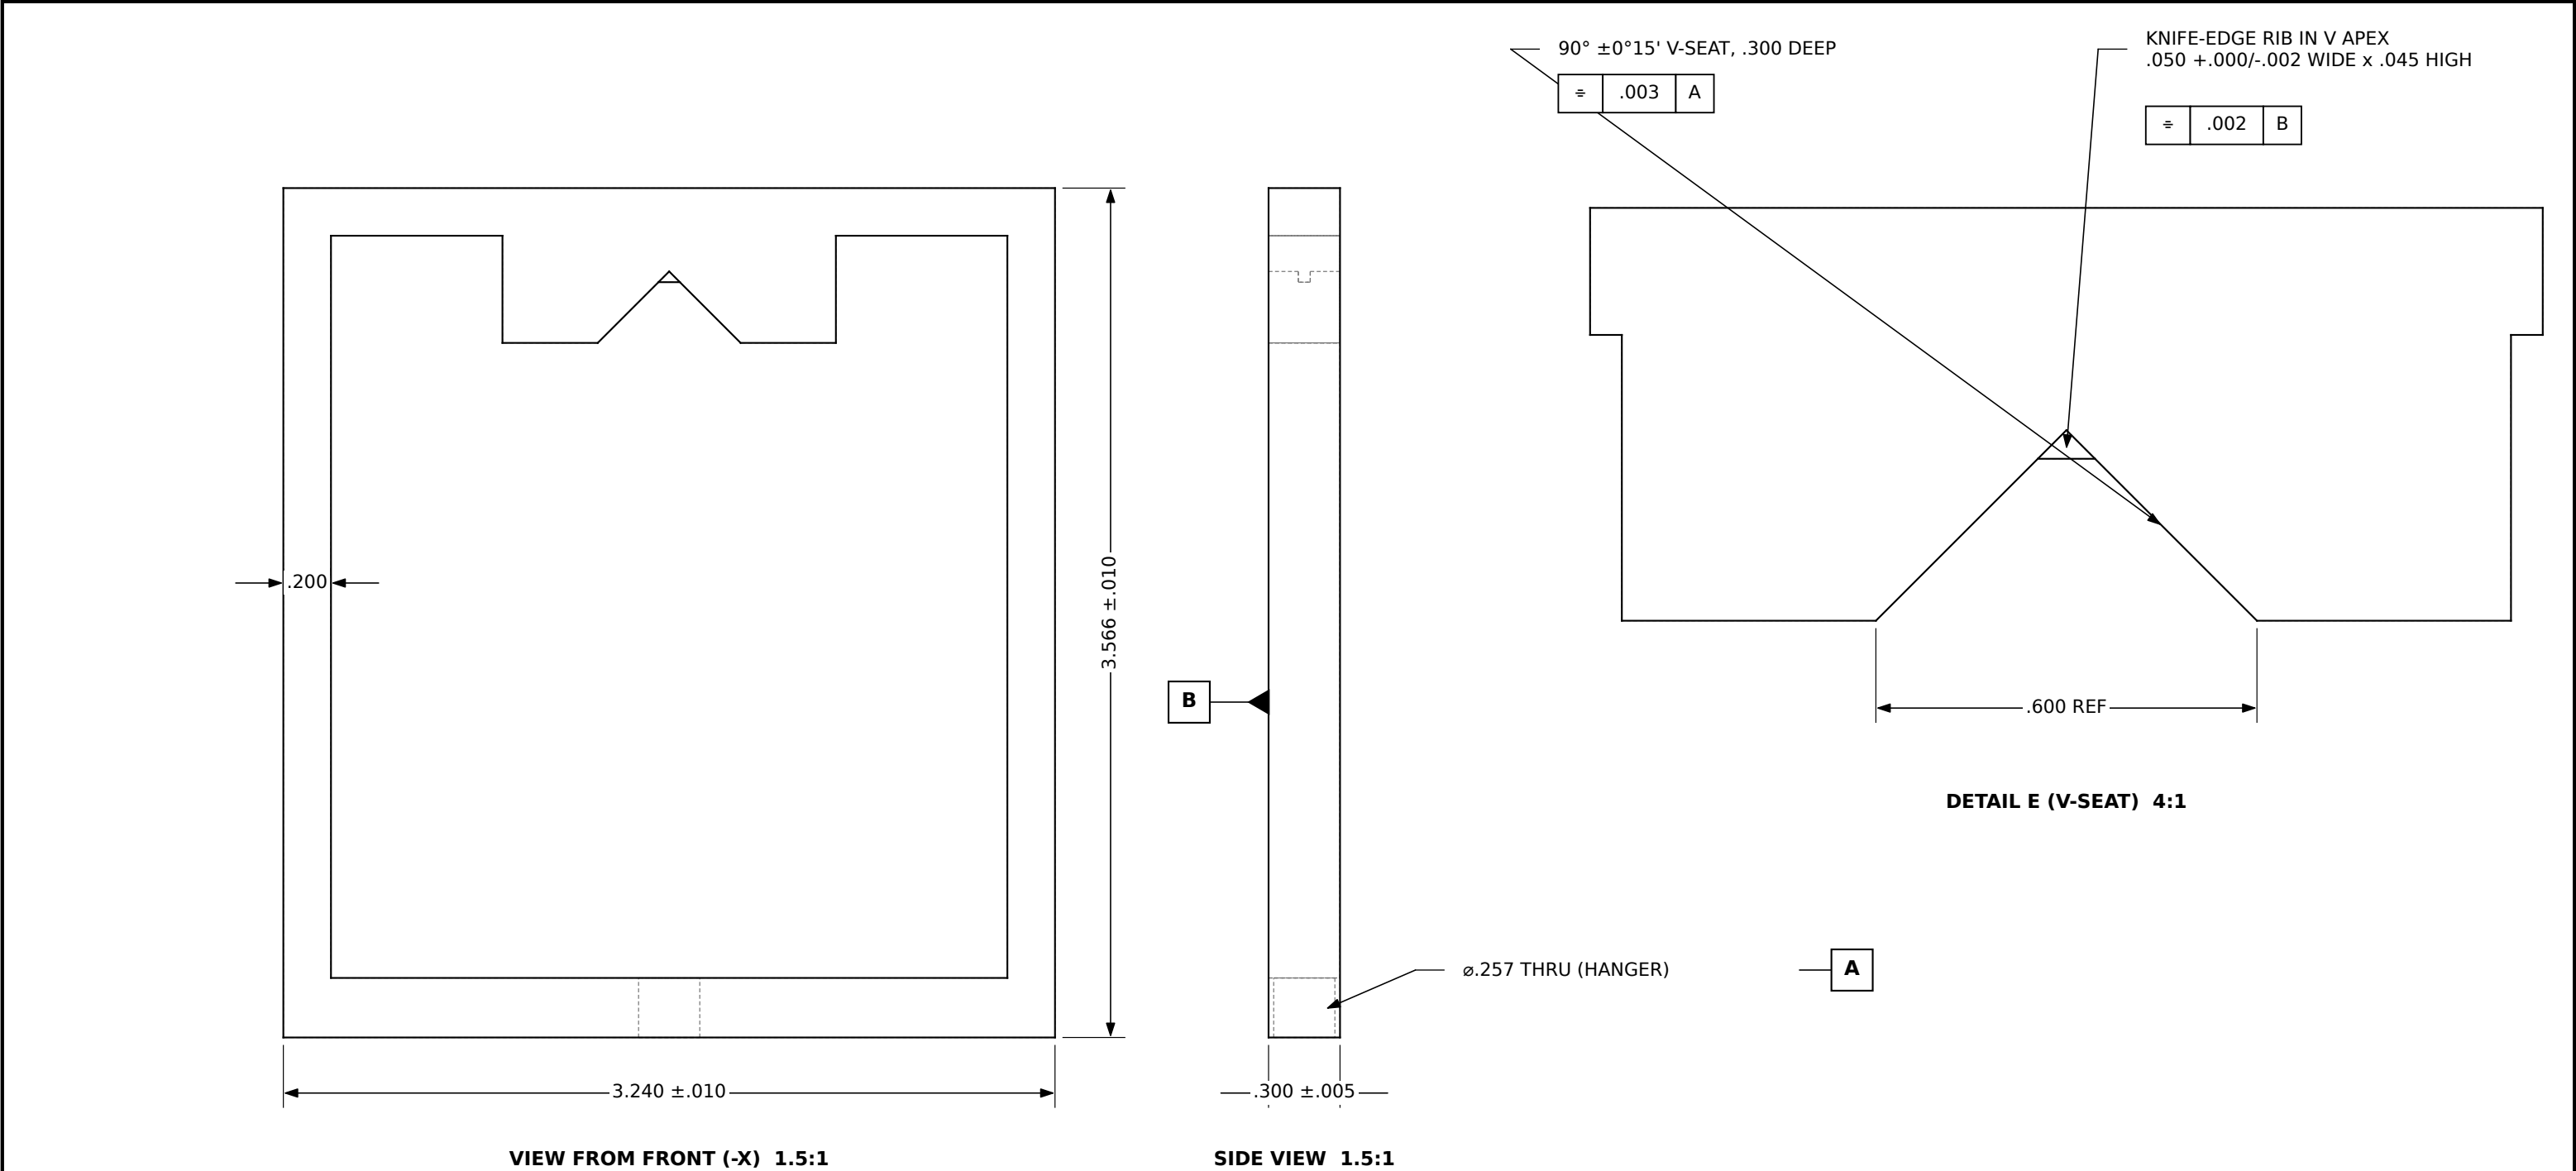

- NOTES:**
1. PROFILE: WATERJET OR MILL FROM .300 PLATE, THEN MILL THE V-SEAT AND THE KNIFE-EDGE RIB IN ONE SETUP.
 2. SITS ON THE UPPER CORNER OF THE SLEEVE (WT-6C-301) AT ROLL 45 / 135 / 315 DEG; THE RIB DROPS INTO THE .060 CORNER GROOVE AT THE STATION. HANGER LOAD LINE PASSES THROUGH THE V APEX AND THE BALANCE AXIS (NO ROLLING MOMENT).
 3. V-SEAT FACES Ra 32 μin, NO BURRS; RIB EDGES BROKEN .005 MAX.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 μin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT				DRAWN / DATE			
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
TITLE				CHECKED		APPROVED	
STIRRUP, 45 DEG CALIBRATION							
MATERIAL				FINISH			
6061-T6 ALUMINUM, .300 PLATE				CLEAR ANODIZE TYPE II			
DWG NO.		REV	SIZE	SCALE		WEIGHT	SHEET
WT-6C-303		A	B	1.5:1 / 4:1		0.09 lb	17 OF 36