



A

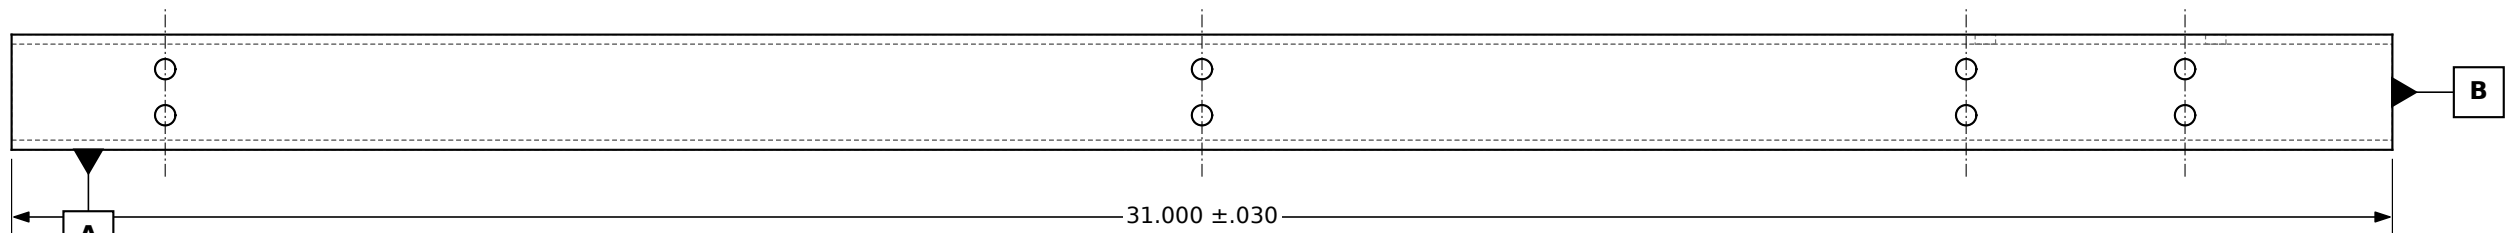

FRONT VIEW 1:2.5

HOLE TABLE - ALL Ø.266 THRU; POSITION Ø.010 A B (BASIC DIMS)

HOLES	WALL	FROM B (X)	FROM A (Z)	PURPOSE
H1-H4	SIDE WALLS THRU	29.000	.450 / 1.050	THRUST UPRIGHT
H5-H8	SIDE WALLS THRU	15.500	.450 / 1.050	DRAG UPRIGHT
H9-H12	SIDE WALLS THRU	5.550	.450 / 1.050	HEAD PLATE (NEW)
H13-H16	SIDE WALLS THRU	2.700	.450 / 1.050	HEAD PLATE (NEW)
H17	TOP WALL	5.300	-	3-COMP FOOT BLOCK (OPTIONAL)
H18	TOP WALL	2.300	-	3-COMP FOOT BLOCK (OPTIONAL)

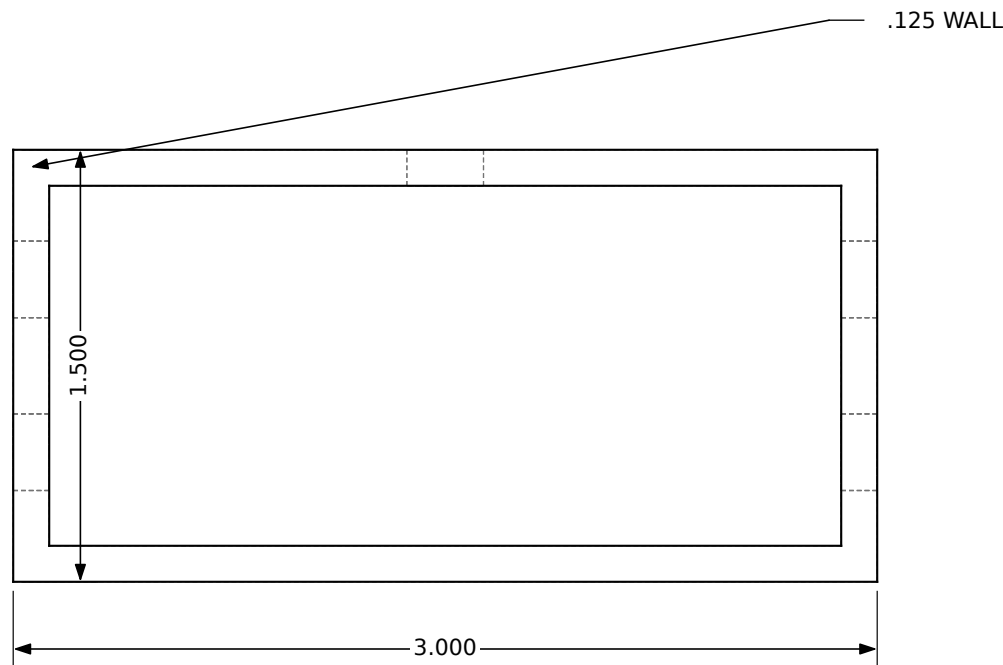

END VIEW 1.5:1

NOTES:

1. CUT TO LENGTH, ENDS SQUARE .005. ALL HOLES Ø.266 (1/4 BOLTS). SIDE-WALL HOLES DRILLED THROUGH BOTH WALLS IN ONE PASS.
2. HOLE TABLE DIMENSIONS FROM THE AFT END (DATUM B) AND THE BOTTOM FACE (DATUM A).
3. PULLEY UPRIGHT HOLES (DRAG $x = 7.0$, THRUST $x = -6.5$ FROM THE BMC) ARE UNCHANGED FROM THE 3-COMPONENT STAND; HEAD-PLATE HOLES ARE NEW FOR THE 6-COMPONENT HEAD.
4. CLAMP TO THE BENCH WITH 4 C-CLAMPS OR BOLT THROUGH THE BOTTOM WALL; LEVEL THE TOP WITHIN .02 DEG.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X $\pm$.03 .XX $\pm$.010

.XXX ±.005 .XXX ±.0005

ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 $\mu\text{in Ra MAX}$

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



THIRD ANGLE

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

PROJECT				DRAWN / DATE			
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
TITLE				CHECKED		APPROVED	
TUBE, BASE, CALIBRATION STAND							
MATERIAL				FINISH			
6061-T6 RECT. TUBE 3.00 x 1.50 x .125 WALL				AS SUPPLIED; DEBURR			
DWG NO.		REV	SIZE	SCALE		WEIGHT	SHEET
WT-6C-307		A	B	1:2.5 / 1.5:1		3.20 lb	21 OF 36

8

7

6

5

4

3

2

1

A

E

C

□