


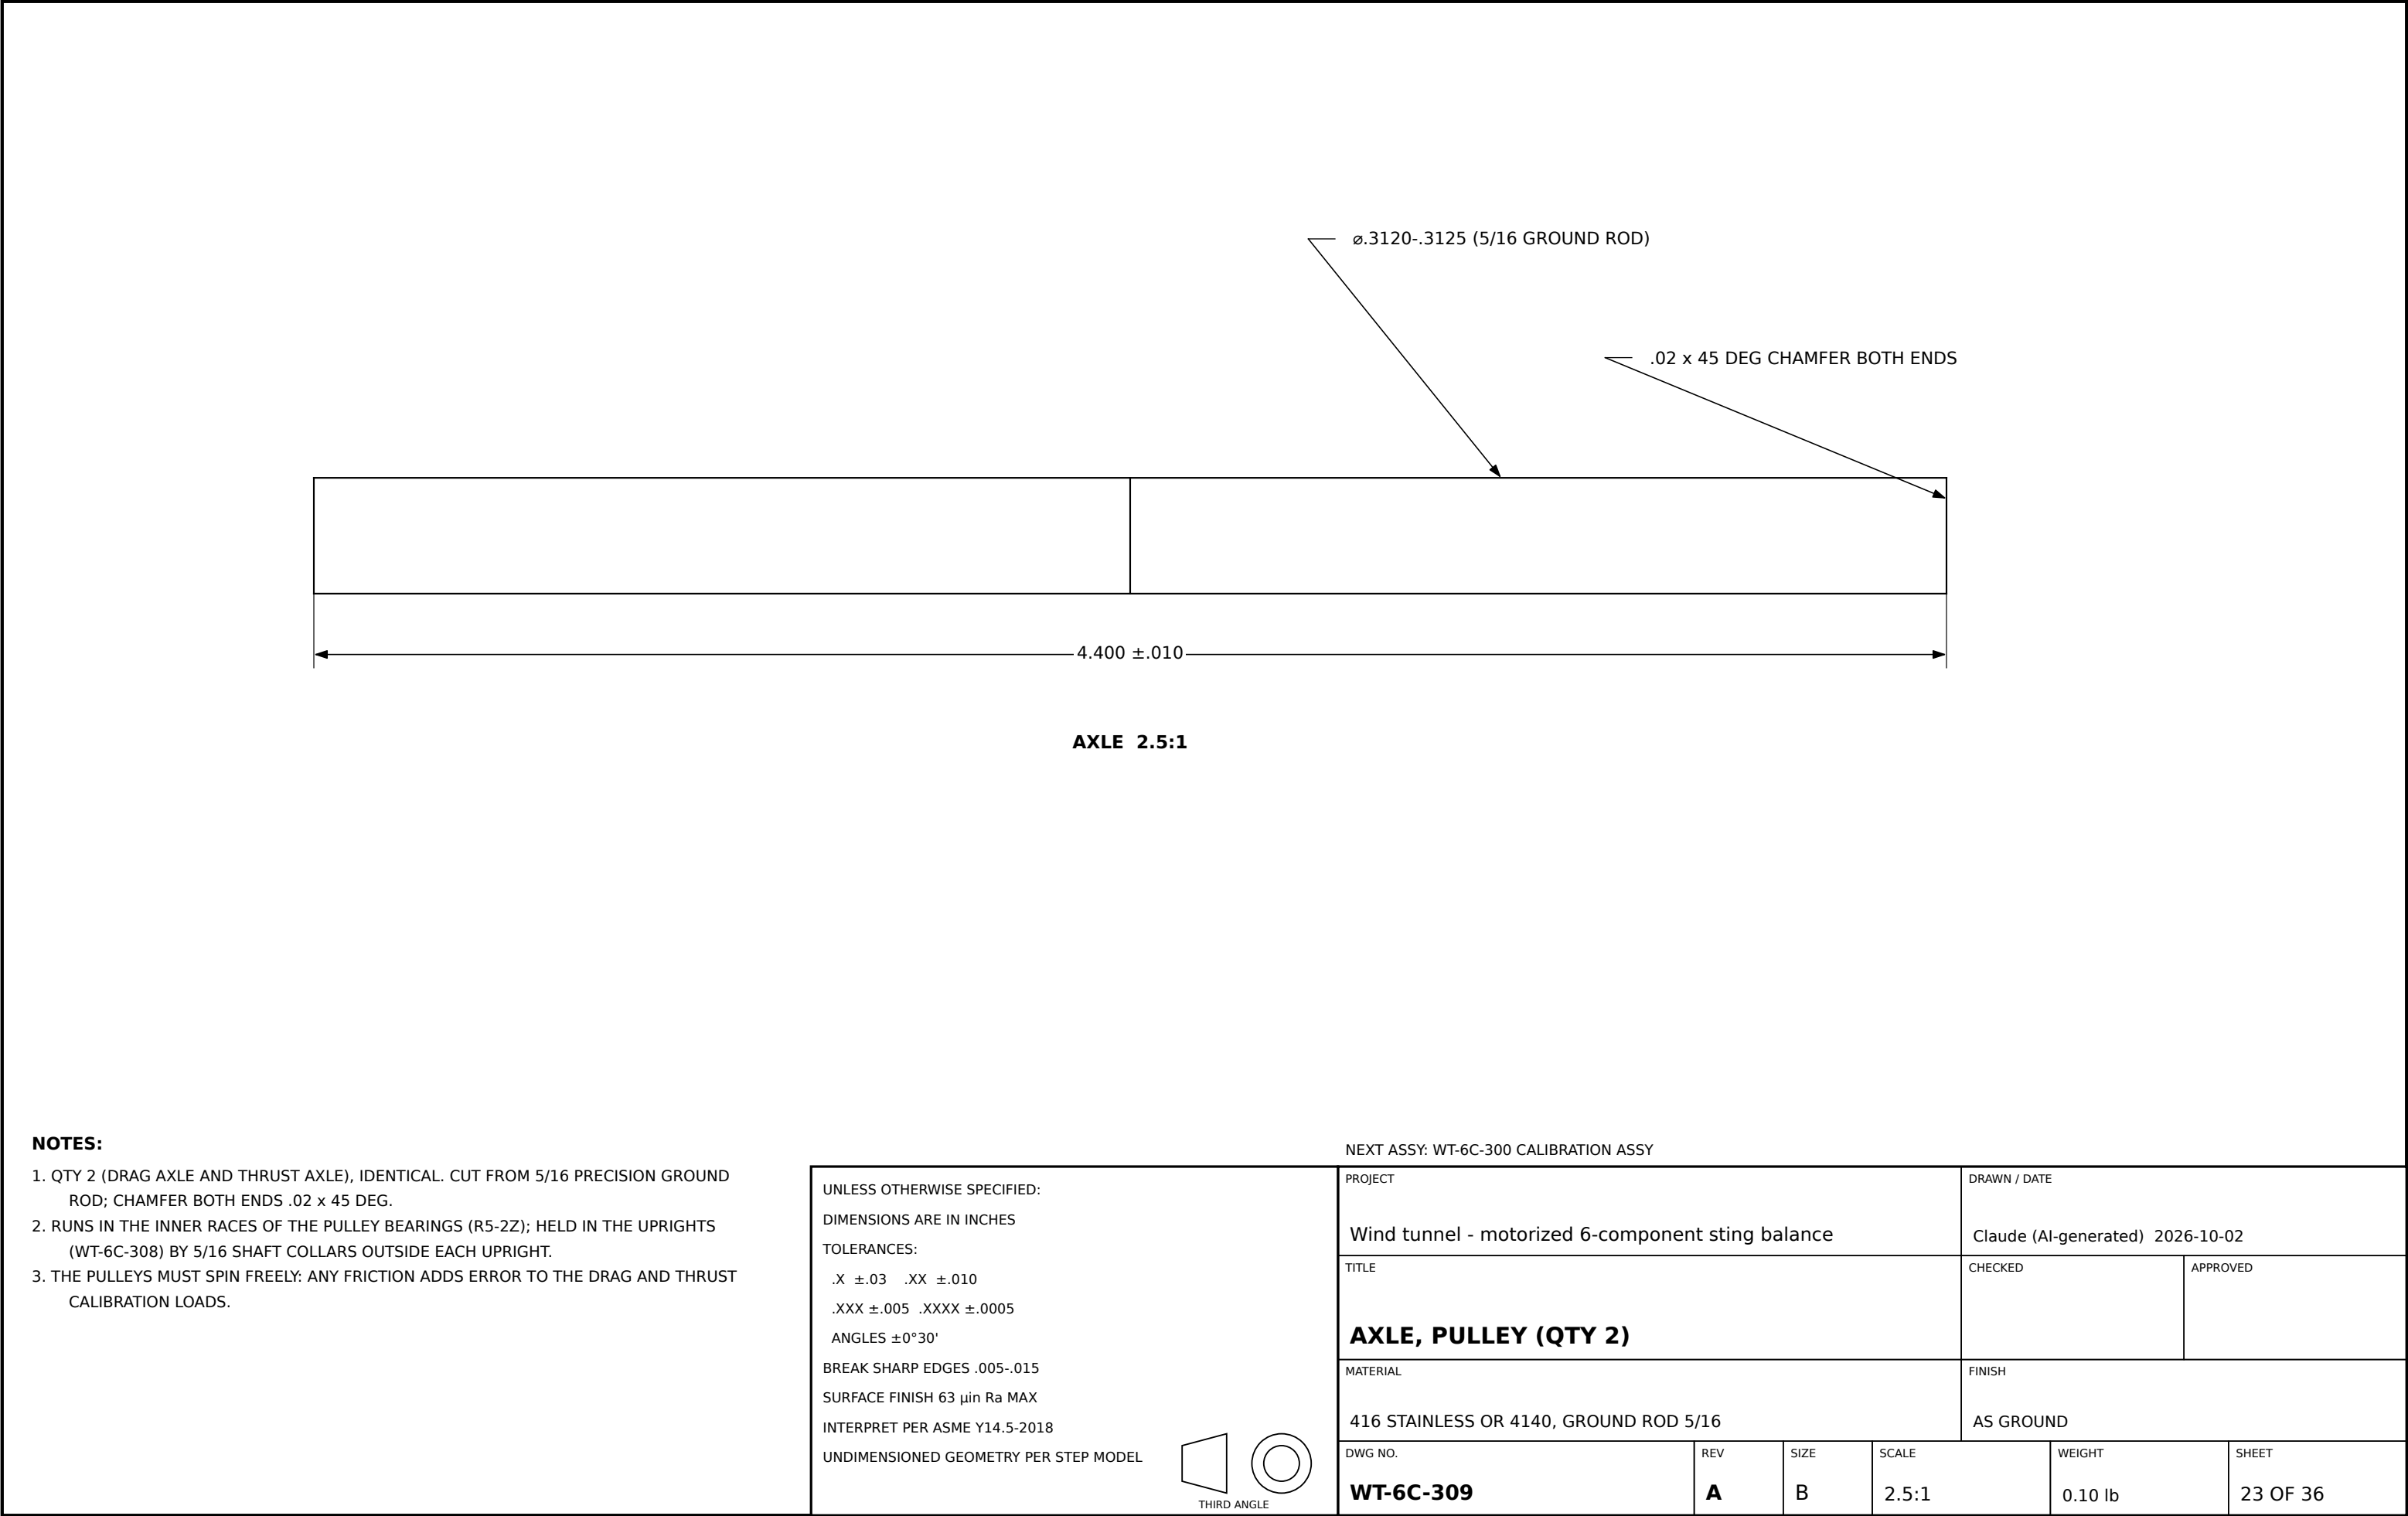

NOTES:

- QTY 2 (DRAG AXLE AND THRUST AXLE), IDENTICAL. CUT FROM 5/16 PRECISION GROUND ROD; CHAMFER BOTH ENDS .02 x 45 DEG.
- RUNS IN THE INNER RACES OF THE PULLEY BEARINGS (R5-2Z); HELD IN THE UPRIGHTS (WT-6C-308) BY 5/16 SHAFT COLLARS OUTSIDE EACH UPRIGHT.
- THE PULLEYS MUST SPIN FREELY: ANY FRICTION ADDS ERROR TO THE DRAG AND THRUST CALIBRATION LOADS.

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .X ±.03 .XX ±.010 .XXX ±.005 .XXXX ±.0005 ANGLES ±0°30' BREAK SHARP EDGES .005-.015 SURFACE FINISH 63 μin Ra MAX INTERPRET PER ASME Y14.5-2018 UNDIMENSIONED GEOMETRY PER STEP MODEL THIRD ANGLE	PROJECT				DRAWN / DATE			
	Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
	TITLE				CHECKED		APPROVED	
	AXLE, PULLEY (QTY 2)							
	MATERIAL				FINISH			
416 STAINLESS OR 4140, GROUND ROD 5/16				AS GROUND				
DWG NO.		REV	SIZE	SCALE		WEIGHT		SHEET
WT-6C-309		A	B	2.5:1		0.10 lb		23 OF 36