
HOLE TABLE (BASIC, FROM THE PITCH AXIS) POSITION ⌀.005 A B C

HOLE	SIZE	X	Z
H1	⌀.281 THRU (TIE)	17.353	4.391
H2	⌀.281 THRU (TIE)	18.710	4.734
C	⌀.281 THRU (SPACER)	14.600	-8.600
H4	⌀.281 THRU (SPACER)	17.000	-8.650
H5	1/4-20 x .75 DP (EDGE)	14.200	-9.100
H6	1/4-20 x .75 DP (EDGE)	15.600	-9.100
H7	1/4-20 x .75 DP (EDGE)	17.400	-9.100

⌖	⌀.005	A	B	C

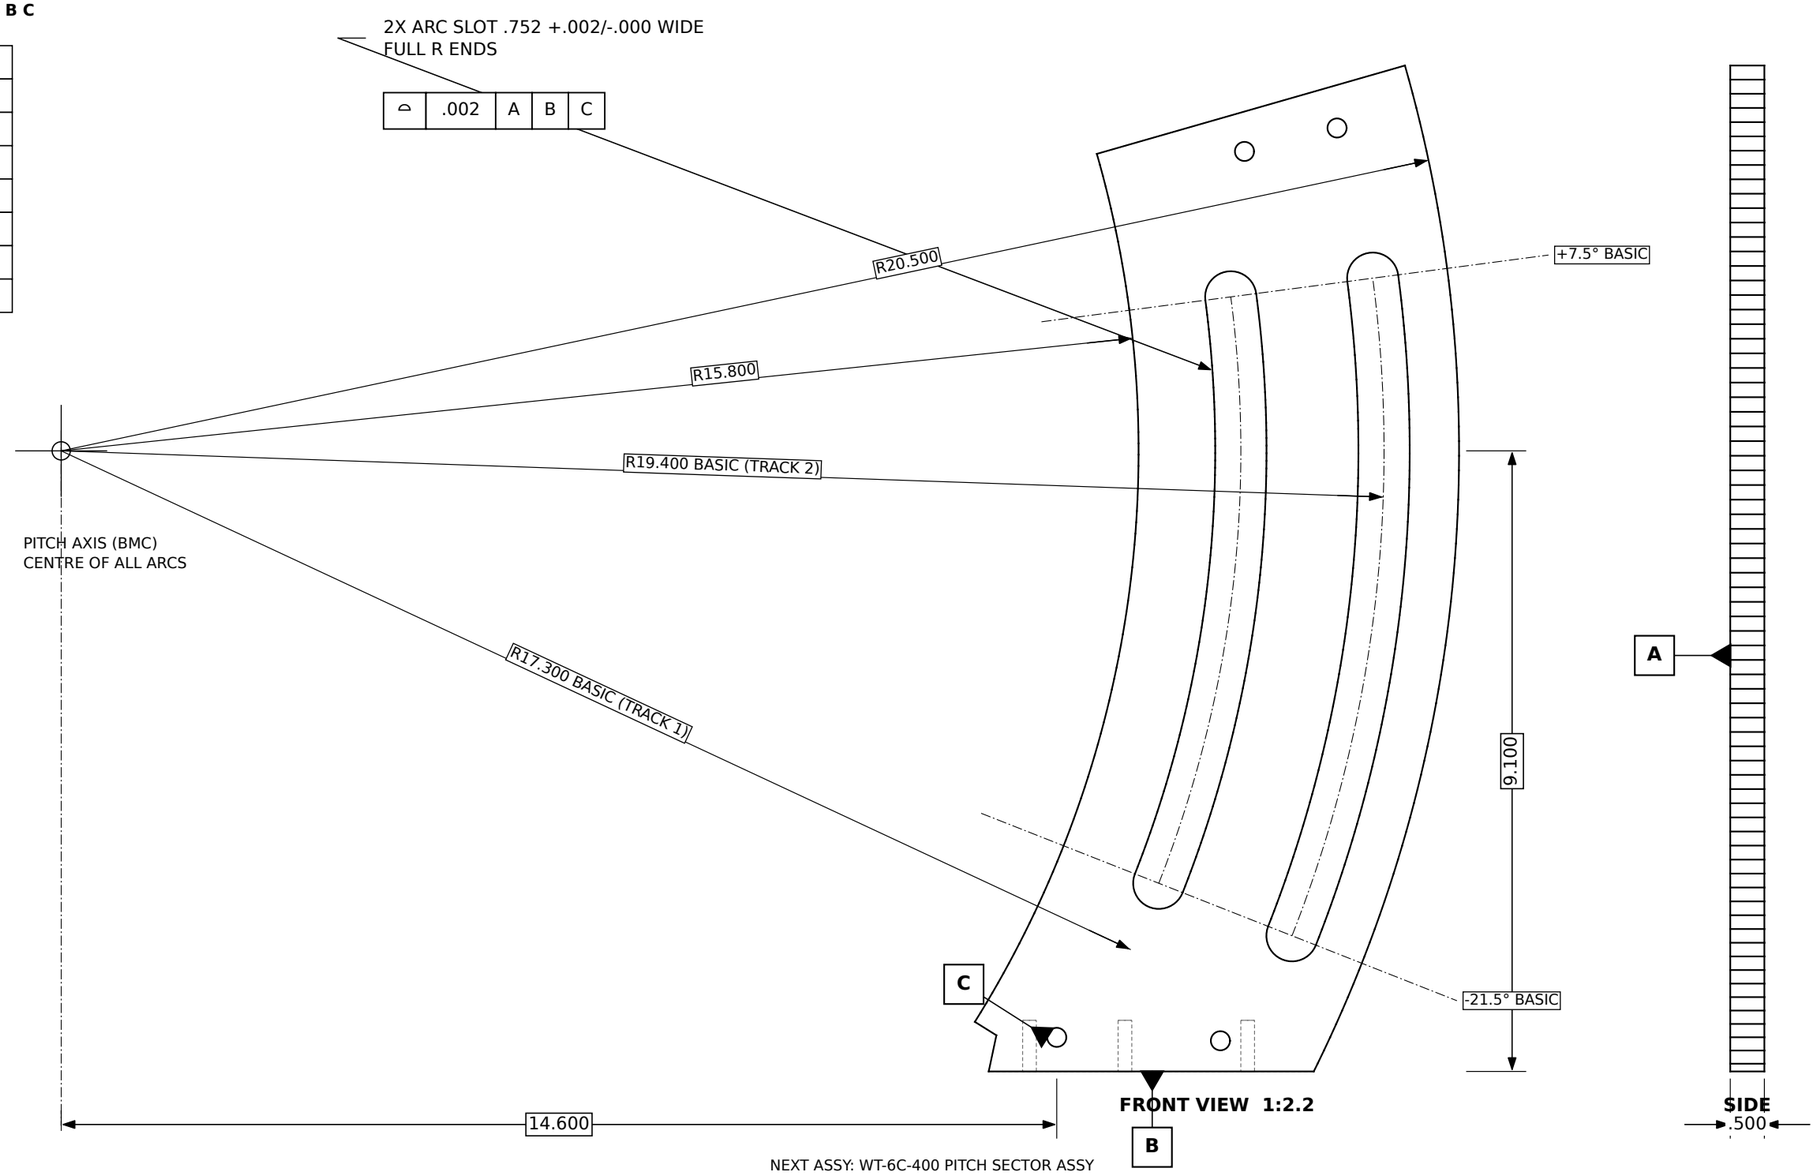

NOTES:

1. QTY 2, IDENTICAL (+Y AND -Y). PROFILE AND SLOTS: CNC MILL (OR WATERJET + FINISH MILL THE SLOTS).
2. THE TWO ARC SLOTS ARE THE CAM-FOLLOWER TRACKS: THEIR CENTRE IS THE PITCH AXIS (BMC). MACHINE BOTH CHEEKS STACKED AND PINNED IN ONE SETUP. SLOT FACES Ra 32 µin, NO STEPS AT TOOL ENTRY.
3. PITCH-AXIS ORIGIN: 9.100 ABOVE DATUM B AND 14.600 FORWARD OF HOLE C (BASIC). HOLE TABLE COORDINATES ARE FROM THE PITCH AXIS, X AFT, Z UP.
4. BOTTOM EDGE: 3X 1/4-20 UNC-2B .75 DEEP FOR THE BASE PLATE BOLTS (WT-6C-403).

NEXT ASSY: WT-6C-400 PITCH SECTOR ASSY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **CHEEK, PITCH SECTOR (QTY 2)**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM, .500 PLATE				FINISH: CLEAR ANODIZE TYPE II	
DWG NO.: **WT-6C-401**	REV: **A**	SIZE: B	SCALE: 1:2.2	WEIGHT: 2.59 lb	SHEET: 25 OF 36