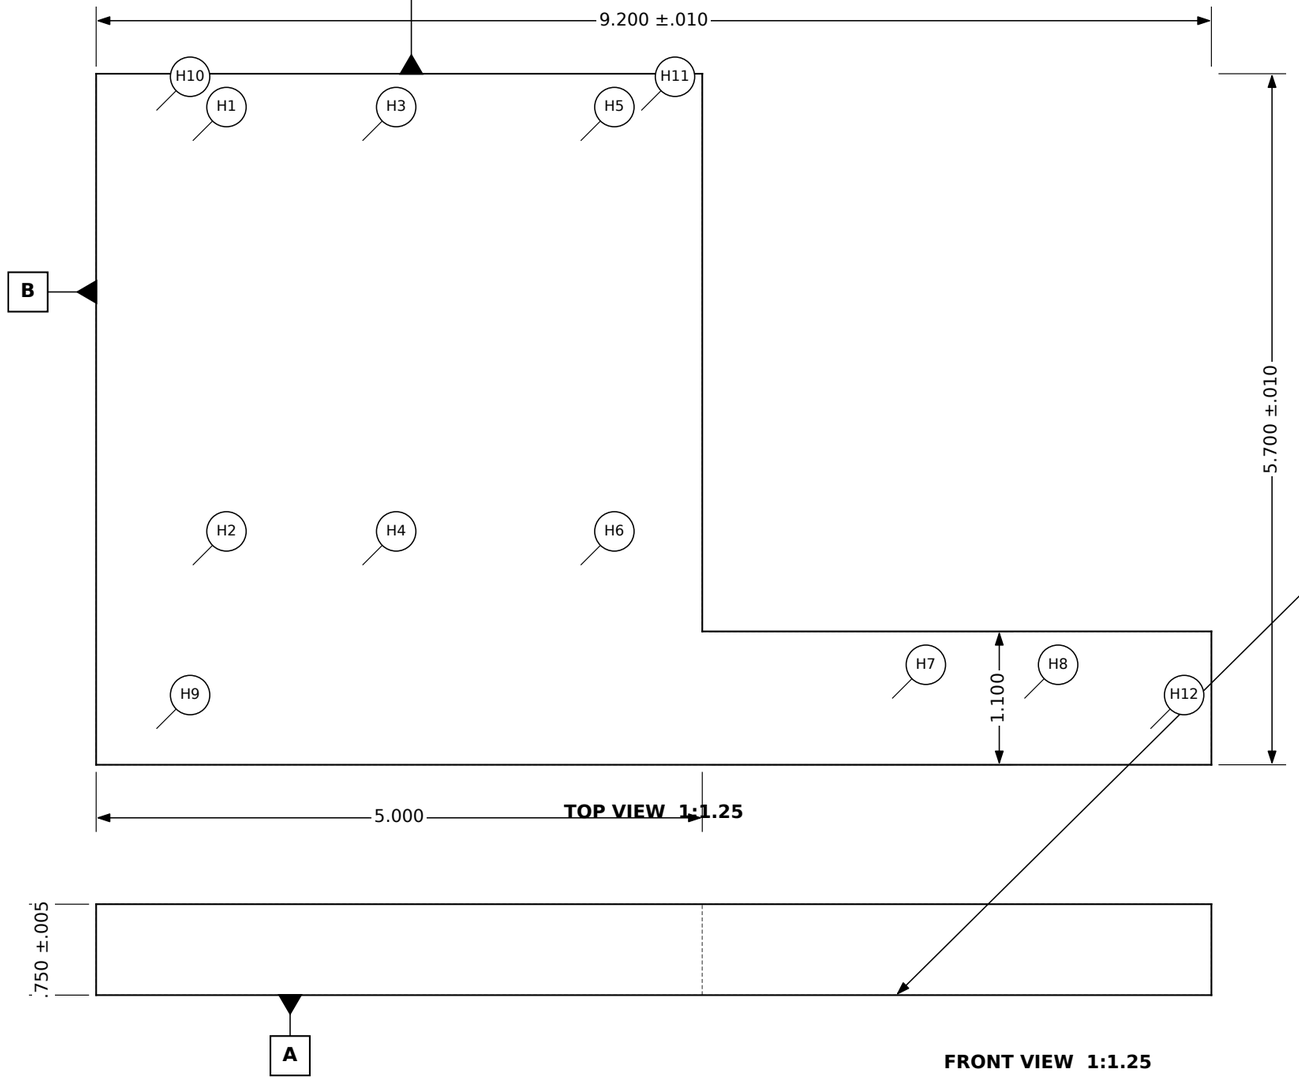


HOLE TABLE (BASIC: X FROM B, Y FROM C) POSITION ⌀.010 A B C

HOLE	SIZE	X	Y
H1	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	0.800	0.550
H2	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	0.800	4.050
H3	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	2.200	0.550
H4	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	2.200	4.050
H5	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	4.000	0.550
H6	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	4.000	4.050
H7	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	6.569	5.150
H8	⌀.281 THRU ⌴⌀.42 ⌄.28 (BOTTOM)	7.660	5.150
H9	⌀.406 THRU (CARRIAGE)	0.500	5.400
H10	⌀.406 THRU (CARRIAGE)	0.500	0.300
H11	⌀.406 THRU (CARRIAGE)	4.500	0.300
H12	⌀.406 THRU (CARRIAGE)	8.700	5.400

NOTES:

1. DATUM A = BOTTOM FACE (SITS ON THE YAW CARRIAGE PLATE, WT-6C-504). FLAT .002 OVER THE PART.
2. CHEEK AND RACK-FOOT HOLES ARE COUNTERBORED FROM BELOW FOR 1/4-20 SHCS.
3. 4X Ø.406 HOLES TAKE 3/8-16 SHCS INTO THE YAW CARRIAGE PLATE.
4. NOTCH AFT OF X = 18.400: THE ROLL GEARBOX AND NEMA 23 SWING DOWN THROUGH IT AT HIGH PITCH - DO NOT ADD MATERIAL THERE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03 .XX ±.010

.XXX ±.005 .XXXX ±.0005

ANGLES ±0°30'

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 µin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

NEXT ASSY: WT-6C-400 PITCH SECTOR ASSY

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **PLATE, BASE, PITCH SECTOR**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM, .750 PLATE				FINISH: CLEAR ANODIZE TYPE II	
DWG NO.: **WT-6C-403**	REV: **A**	SIZE: B	SCALE: 1:1.25	WEIGHT: 2.42 lb	SHEET: 27 OF 36