
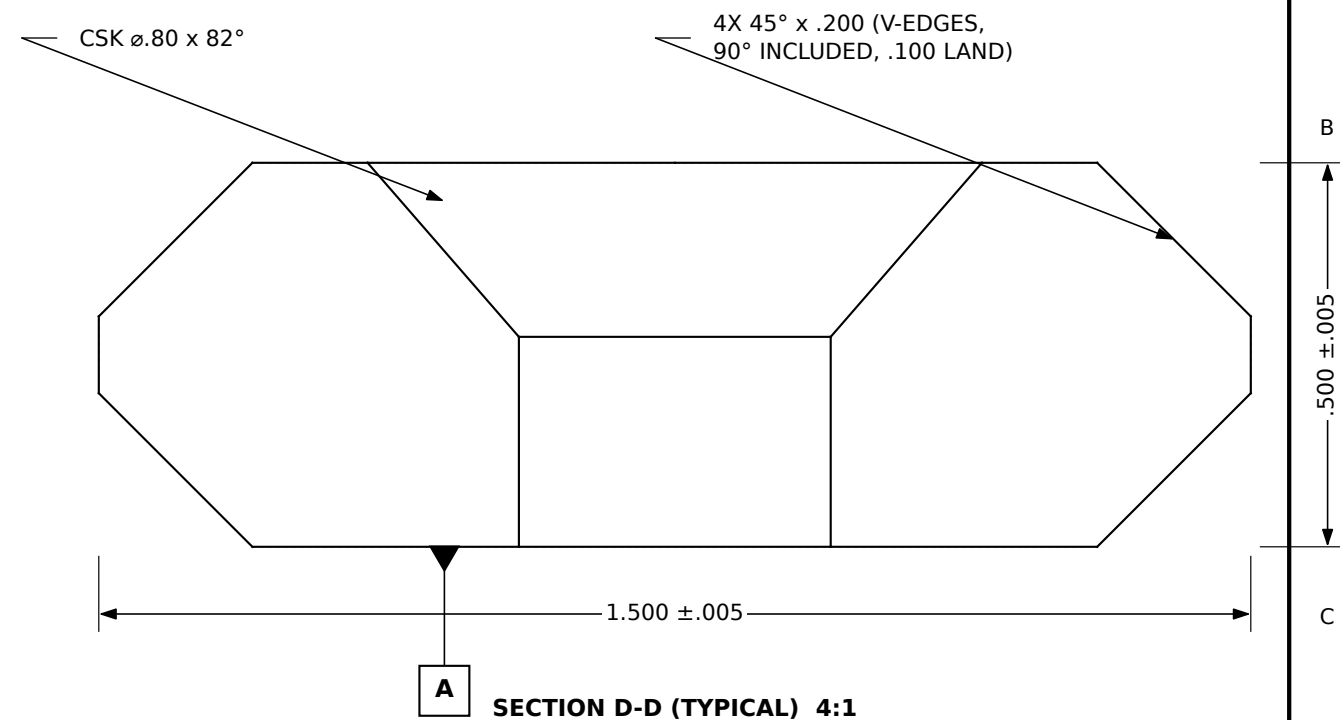


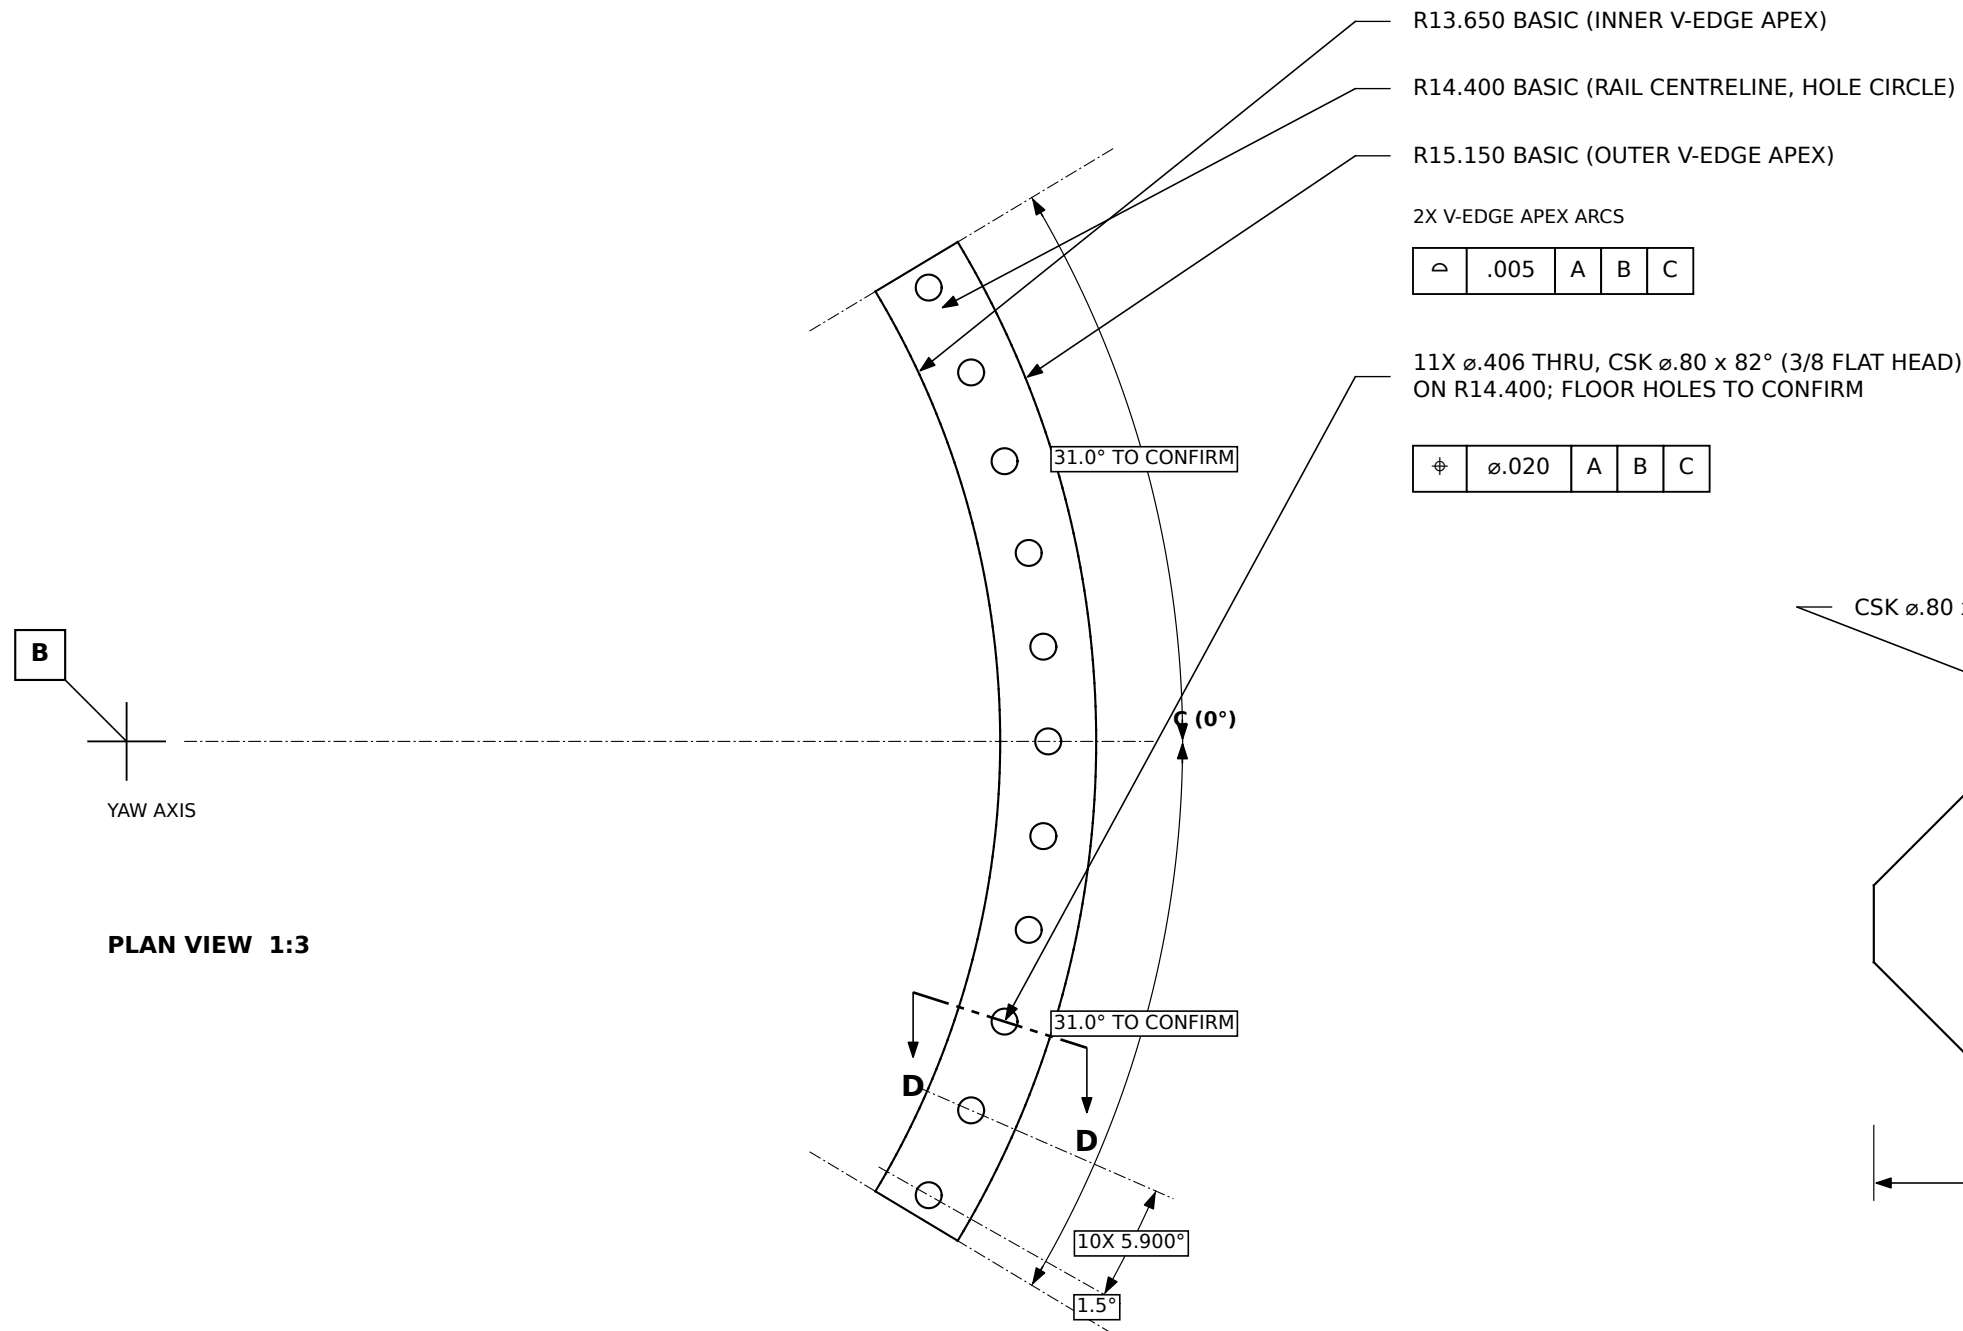

NOTES:

1. DIMENSIONS MARKED TO CONFIRM DEPEND ON THE DOWNSTREAM BAY FLOOR HEIGHT/WIDTH AND THE SPACE UNDER THE TEST-SECTION EXIT; VERIFY ON THE TUNNEL BEFORE MACHINING.
2. DATUM A = BOTTOM FACE. DATUM B = YAW AXIS (CENTRE OF ALL ARCS, VERTICAL THROUGH THE BALANCE MOMENT CENTRE). DATUM C = PLAN ANGLE 0 DEG (+X, DOWNSTREAM ALONG THE TUNNEL AXIS). ANGLES ARE PLAN ANGLES FROM C TOWARD +Y.
3. V-EDGES (BOTH SIDES) ARE THE WHEEL TRACKS: 90 DEG INCLUDED, Ra 32 μ m, NO STEPS ALONG THE ARC. CUT THE ARCS ON A CNC MILL OR WATERJET + FINISH PASS FROM ONE CENTRE.
4. INSTALL CONCENTRIC WITH THE YAW AXIS WITHIN .005 USING A RADIUS BAR PIVOTING ON A PIN AT THE YAW AXIS; DRILL THE FLOOR THROUGH THE PART.
5. MATCH THE V-EDGE TO THE PURCHASED V-WHEEL (1.00 OD, 90 DEG GROOVE); CONFIRM WITH THE VENDOR DRAWING.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X $\pm$.03 .XX $\pm$.010

.XXX ±.005 .XXXX ±.0005


ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 $\mu\text{in Ra MAX}$

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-500 YAW CARRIAGE ASSY

PROJECT				DRAWN / DATE		
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02		
TITLE				CHECKED		APPROVED
RAIL, YAW, INNER (R14.4)						
MATERIAL				FINISH		
6061-T6 ALUMINUM, .500 PLATE				HARD ANODIZE TYPE III (V-EDGES)		
DWG NO.	REV	SIZE	SCALE	WEIGHT	SHEET	
WT-6C-501	A	B	1:3 / 4:1	1.07 lb	31 OF 36	

PRELIMINARY - TO CONFIRM