
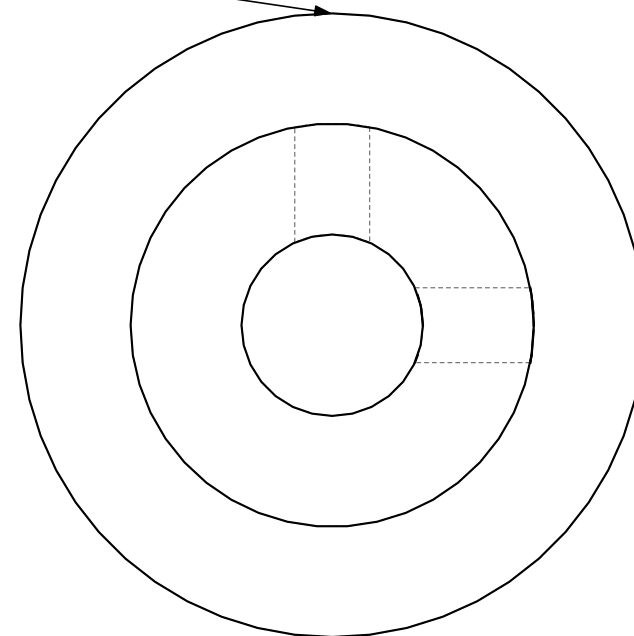


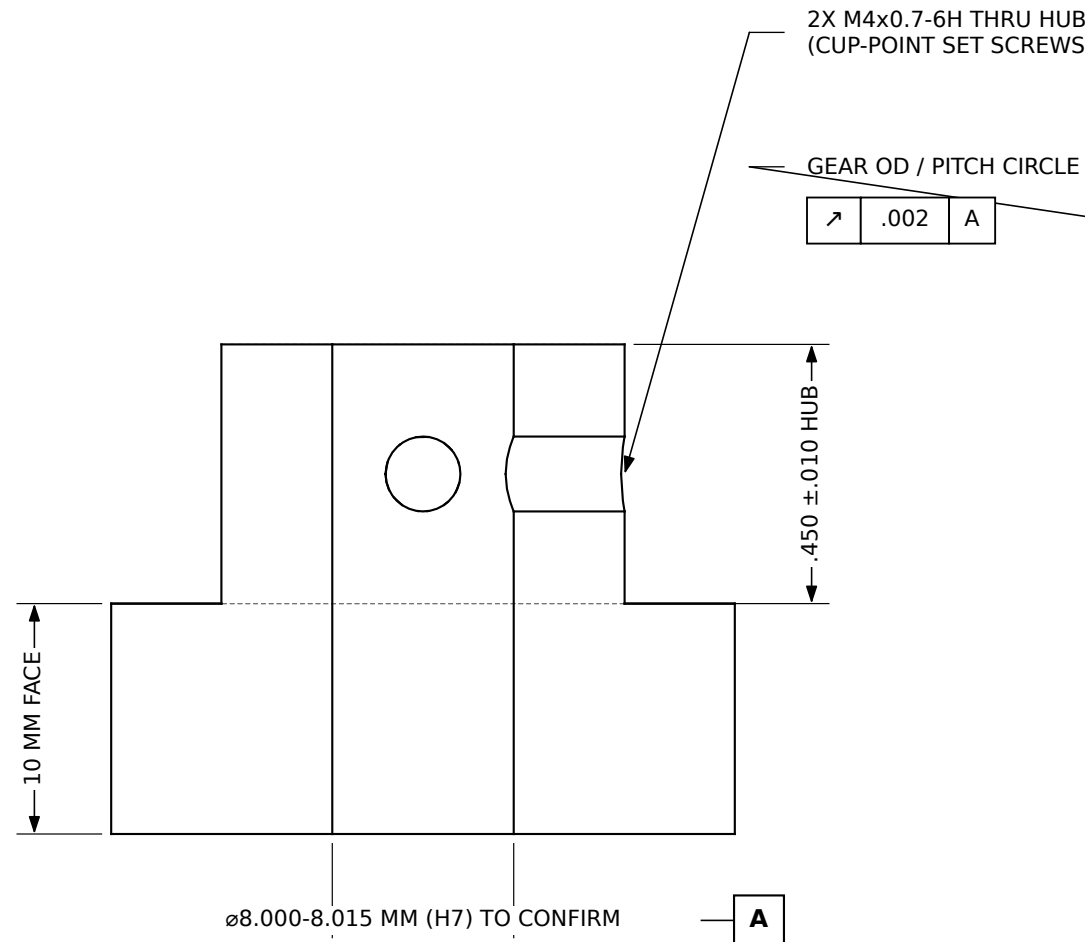

GEAR DATA	
MODULE / PA	1.25 mm / 20°
TEETH	20
PITCH DIA	25.000 mm (.984 in)
OUTSIDE DIA	27.500 mm (1.083 in)
FACE	10 mm
MATES	WT-6C-503 RACK

SECTION A-A 3:1

TOP VIEW 3:1

NOTES:

1. PURCHASE A STOCK m1.25 x 20T x 10 MM FACE STEEL SPUR GEAR WITH HUB (e.g. KHK SS1.25-20 OR EQUIVALENT). MODIFY ONLY: BORE, SET SCREWS, HUB LENGTH
2. BORE SIZE AND KEY / FLAT TO SUIT THE 30:1 WORM GEARMOTOR OUTPUT SHAFT (VENDOR DRAWING, TO CONFIRM). 8 MM SHOWN.
3. THE GEAR RUNS AT RAIL LEVEL, 1.45 IN BELOW THE CARRIAGE PLATE TOP: IF THE GEARMOTOR SHAFT IS SHORTER, ADD A SHAFT EXTENSION + RIGID COUPLING (TO CONFIRM).
4. MESH WITH THE FLOOR RACK WT-6C-503 AT CENTRE RADIUS 20.092; BACKLASH .002-.004.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03	.XX ±.010
---------	-----------

.XXX ±.005 .XXXX ±.0005


ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 μin Ra MAX

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-500 YAW CARRIAGE ASSY

PROJECT				DRAWN / DATE			
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
TITLE				CHECKED		APPROVED	
PINION, YAW (MODIFIED STOCK GEAR)							
MATERIAL				FINISH			
STEEL SPUR GEAR, m1.25 20T 20° PA, WITH HUB				AS SUPPLIED; BLACK OXIDE			
DWG NO.		REV	SIZE	SCALE	WEIGHT		SHEET
WT-6C-505		A	B	3:1	0.13 lb		35 OF 36

PRELIMINARY - TO CONFIRM