



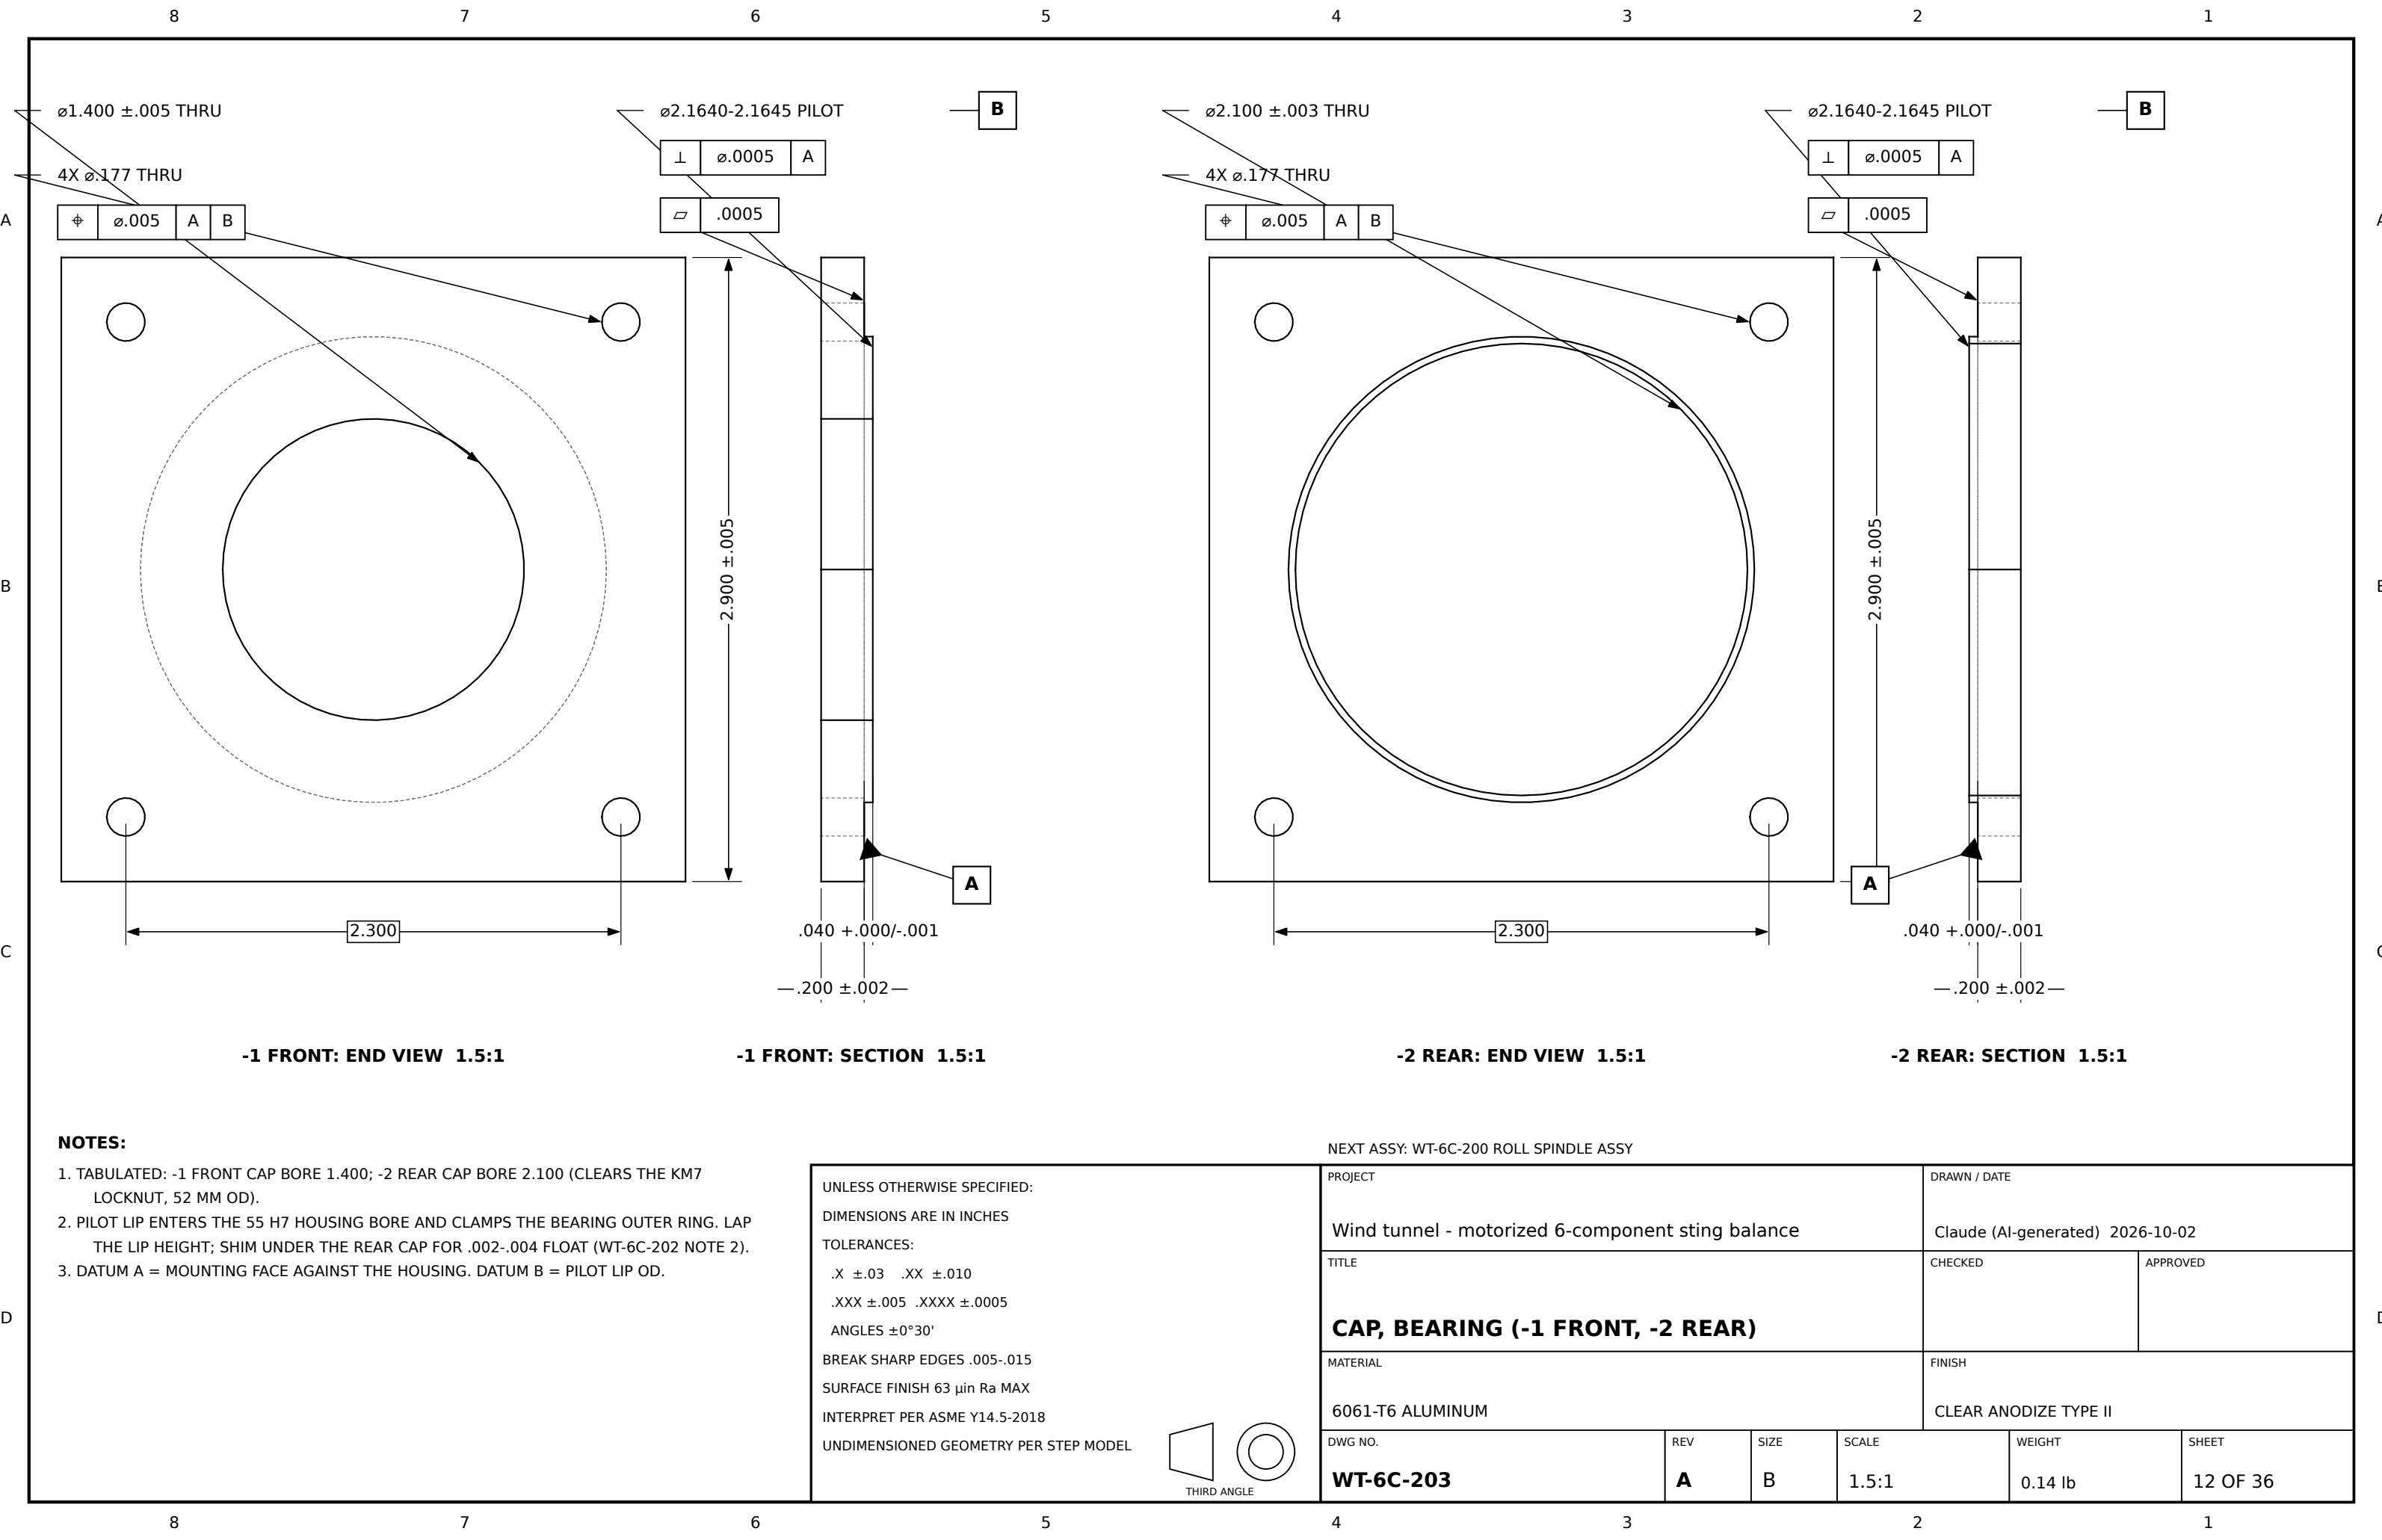

NOTES:

- TABULATED: -1 FRONT CAP BORE 1.400; -2 REAR CAP BORE 2.100 (CLEARS THE KM7 LOCKNUT, 52 MM OD).
- PILOT LIP ENTERS THE 55 H7 HOUSING BORE AND CLAMPS THE BEARING OUTER RING. LAP THE LIP HEIGHT; SHIM UNDER THE REAR CAP FOR .002-.004 FLOAT (WT-6C-202 NOTE 2).
- DATUM A = MOUNTING FACE AGAINST THE HOUSING. DATUM B = PILOT LIP OD.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-200 ROLL SPINDLE ASSY

PROJECT				DRAWN / DATE				
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02				
TITLE				CHECKED		APPROVED		
CAP, BEARING (-1 FRONT, -2 REAR)								
MATERIAL				FINISH				
6061-T6 ALUMINUM				CLEAR ANODIZE TYPE II				
DWG NO.		REV	SIZE	SCALE		WEIGHT		SHEET
WT-6C-203		A	B	1.5:1		0.14 lb		12 OF 36