


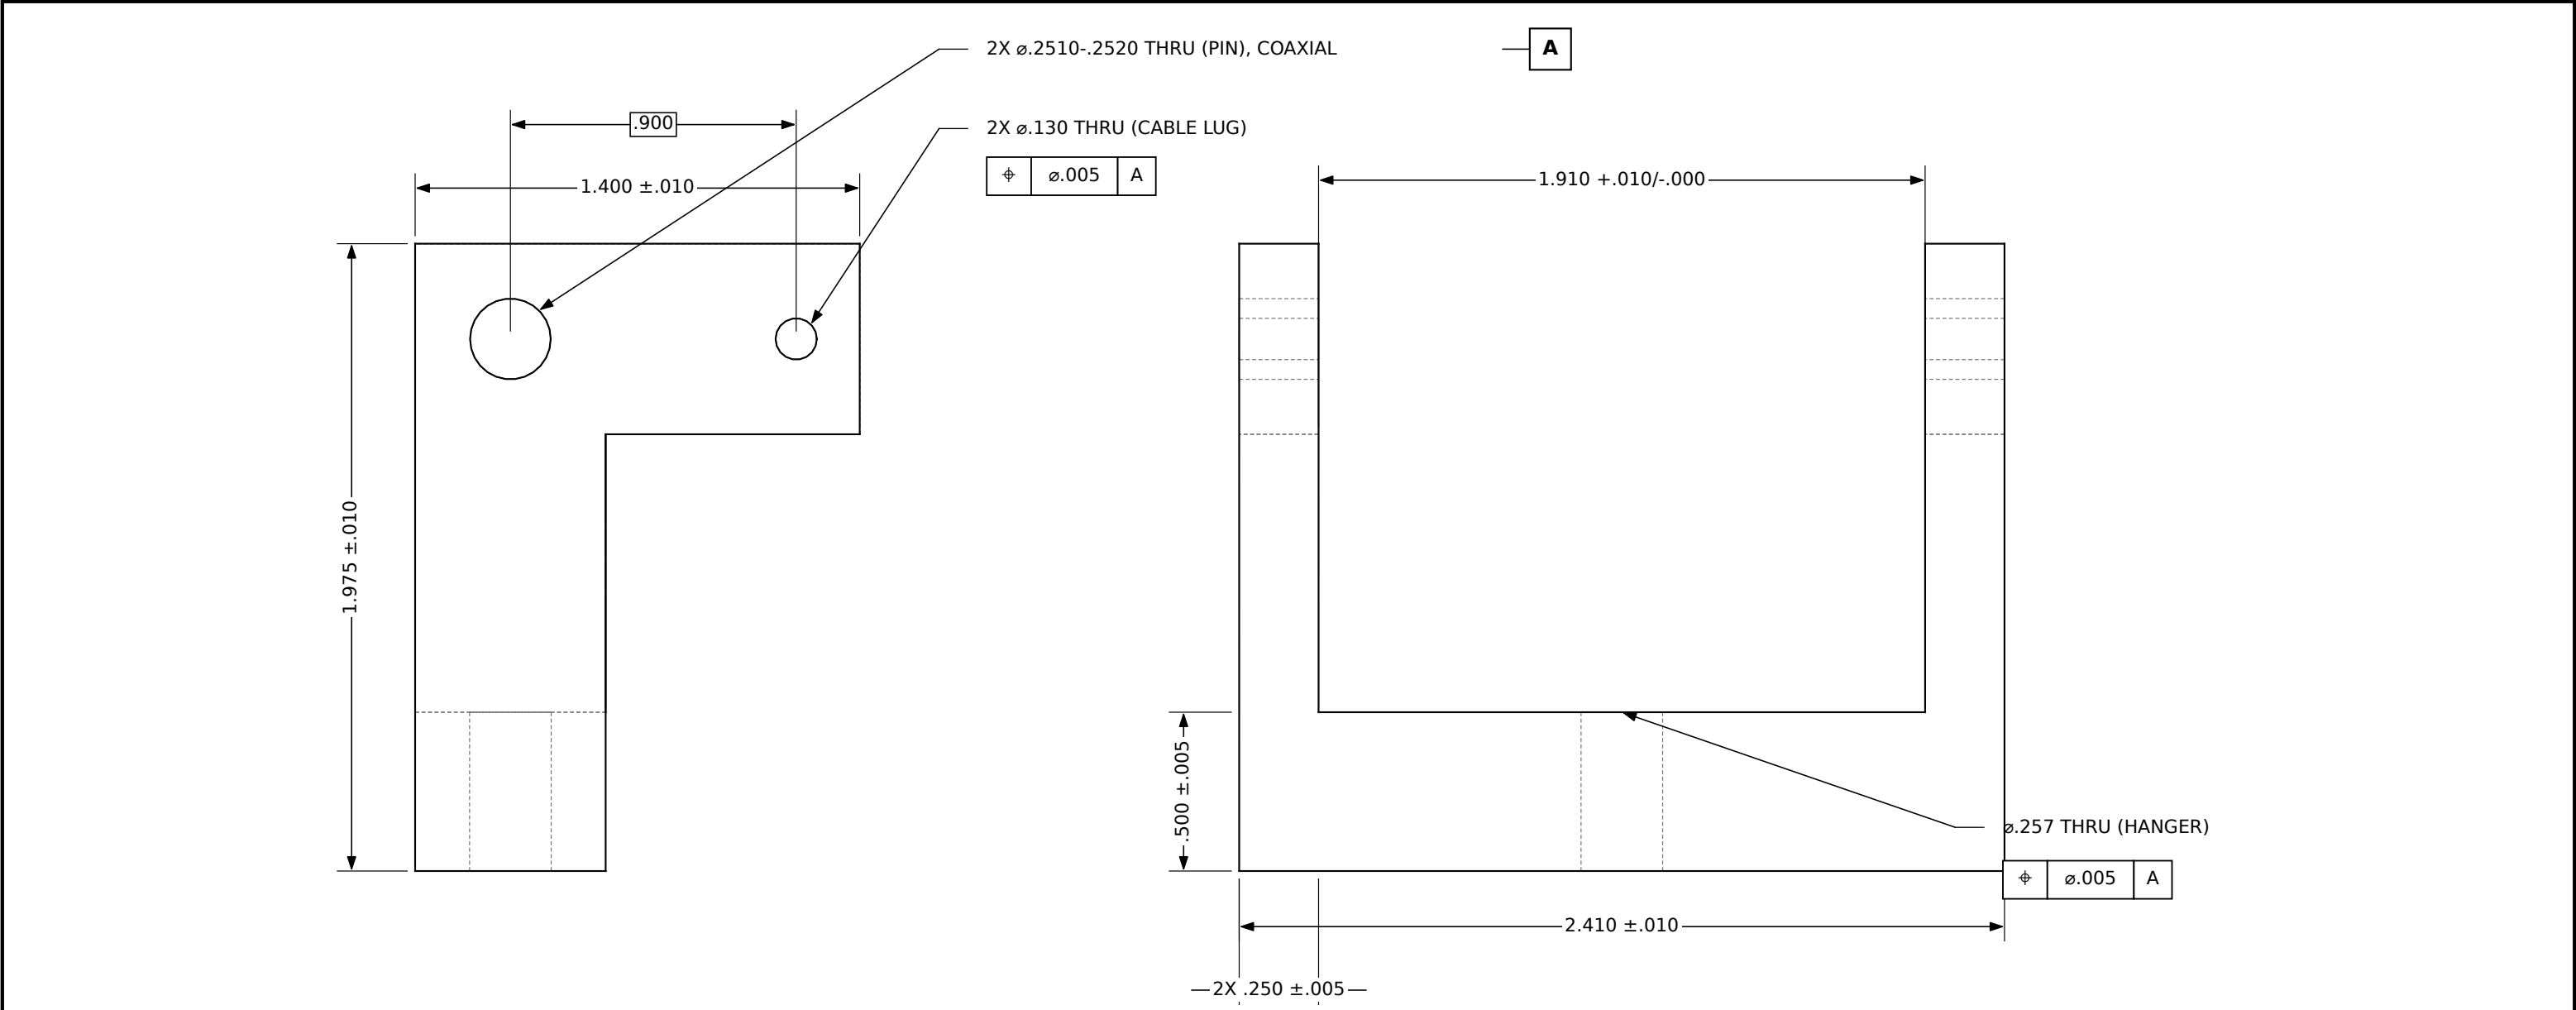

FRONT VIEW 2:1

VIEW FROM FRONT (-X) 2:1

- NOTES:**
- 1. MAY BE MADE AS 3 PIECES (2 STRAPS + BAR) JOINED WITH 2X #8-32 SHCS + 1/8 DOWEL PER JOINT; LINE-REAM THE PIN HOLES AFTER ASSEMBLY.
 - 2. HANGS ON A 1/4 GROUND PIN THROUGH THE SLEEVE STATION HOLES; ITS WEIGHT ACTS AT THE PIN AXIS. WEIGH THE FINISHED YOKE AND UPDATE analysis/calibration_6c_mass_properties.json.
 - 3. SAME YOKE FOR ROLL 0 / 90 / 180 / 270 DEG (ON WHICHEVER PAIR OF SLEEVE WALLS IS HORIZONTAL).
 - 4. CABLE LUGS TAKE THE DRAG CABLE (LAB +X) AT THE SAME STATION.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .X ±.03 .XX ±.010 .XXX ±.005 .XXXX ±.0005 ANGLES ±0°30' BREAK SHARP EDGES .005-.015 SURFACE FINISH 63 μin Ra MAX INTERPRET PER ASME Y14.5-2018 UNDIMENSIONED GEOMETRY PER STEP MODEL THIRD ANGLE	PROJECT				DRAWN / DATE			
	Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
	TITLE				CHECKED		APPROVED	
	YOKE, CALIBRATION, 6-COMPONENT							
	MATERIAL				FINISH			
6061-T6 ALUMINUM				CLEAR ANODIZE TYPE II				
DWG NO.		REV	SIZE	SCALE		WEIGHT		SHEET
WT-6C-304		A	B	2:1		0.13 lb		18 OF 36