
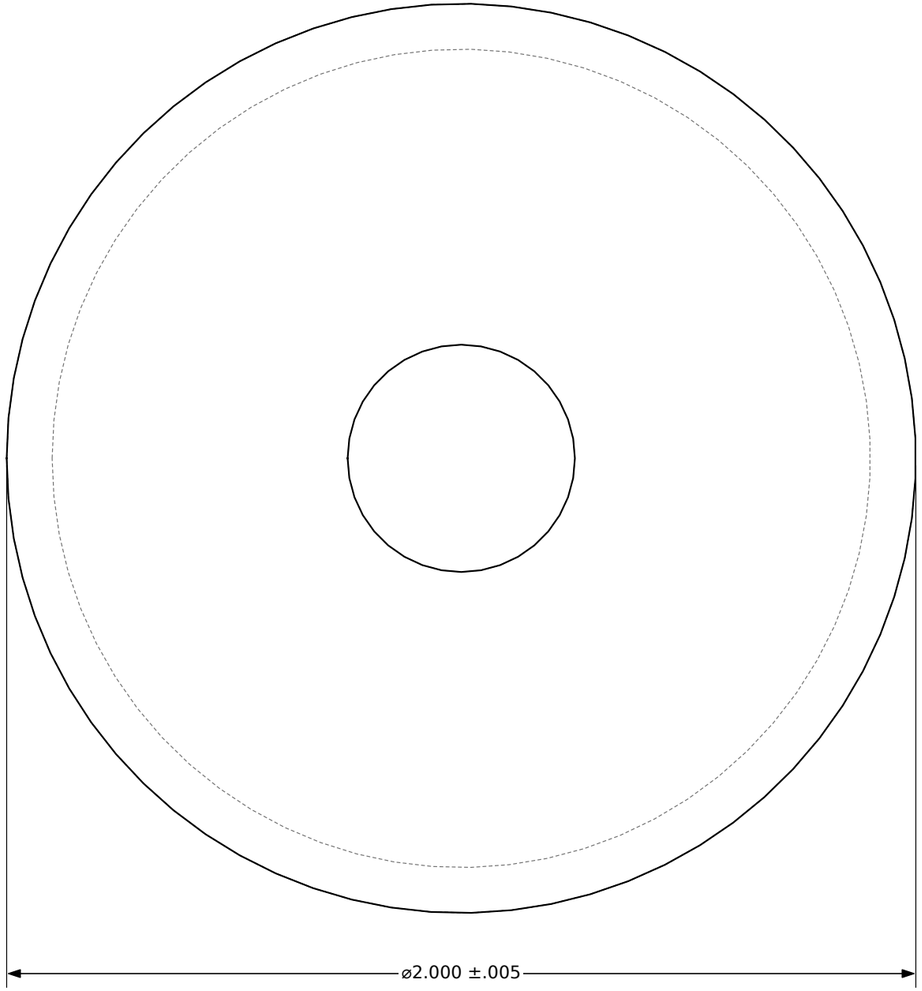


SIDE VIEW 3:1

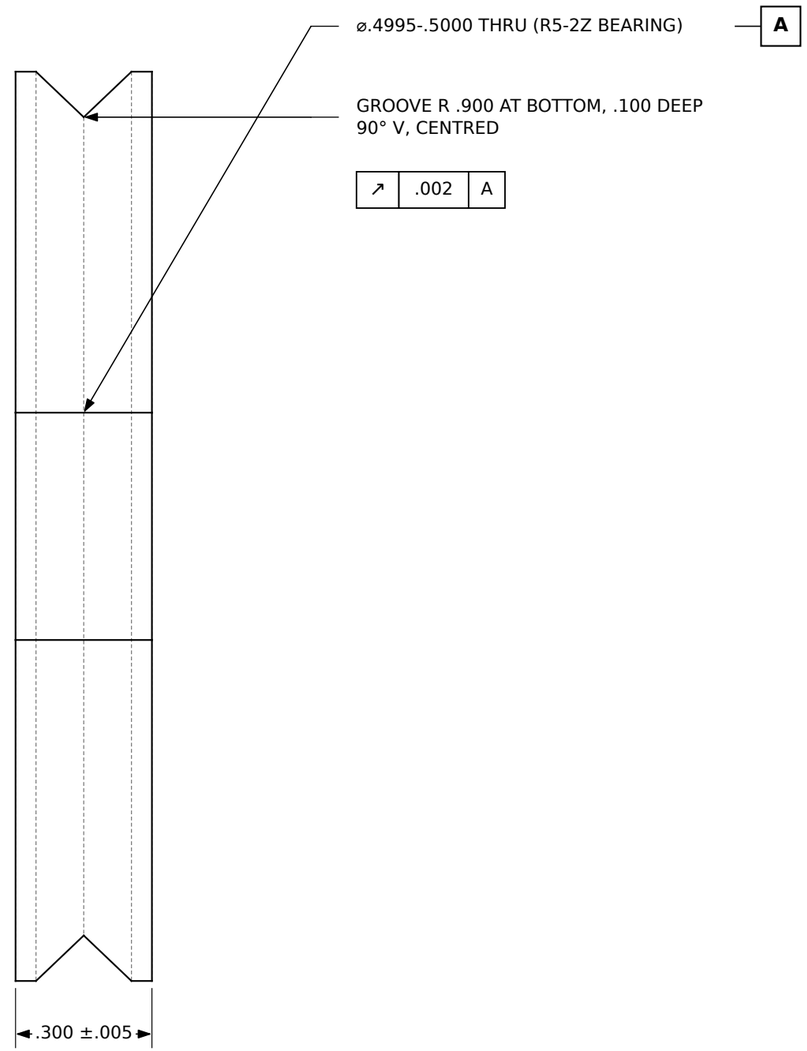

SECTION A-A 3:1

NOTES:

1. QTY 3: 2 DRAG PULLEYS + 1 THRUST PULLEY, IDENTICAL.
2. BORE TAKES ONE R5-2Z BALL BEARING (5/16 x 1/2 x 5/32 IN), PRESS FIT OR LOCTITE 609, CENTRED IN THE WIDTH.
3. GROOVE FOR 1/16 IN (1.6 MM) STAINLESS CABLE; GROOVE SURFACE Ra 32 µin, NO BURRS.
4. THE GROOVE BOTTOM (R .900) SETS THE CABLE LINE: THE CABLE LEAVES TANGENT AT THE BALANCE AXIS HEIGHT.

NEXT ASSY: WT-6C-300 CALIBRATION ASSY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
.X ±.03 .XX ±.010
.XXX ±.005 .XXXX ±.0005
ANGLES ±0°30'
BREAK SHARP EDGES .005-.015
SURFACE FINISH 63 µin Ra MAX
INTERPRET PER ASME Y14.5-2018
UNDIMENSIONED GEOMETRY PER STEP MODEL

THIRD ANGLE

PROJECT: Wind tunnel - motorized 6-component sting balance				DRAWN / DATE: Claude (AI-generated) 2026-10-02	
TITLE: **PULLEY, CABLE, 2 IN (QTY 3)**				CHECKED	APPROVED
MATERIAL: 6061-T6 ALUMINUM				FINISH: CLEAR ANODIZE TYPE II, MASK BORE	
DWG NO.: **WT-6C-310**	REV: **A**	SIZE: B	SCALE: 3:1	WEIGHT: 0.08 lb	SHEET: 24 OF 36