


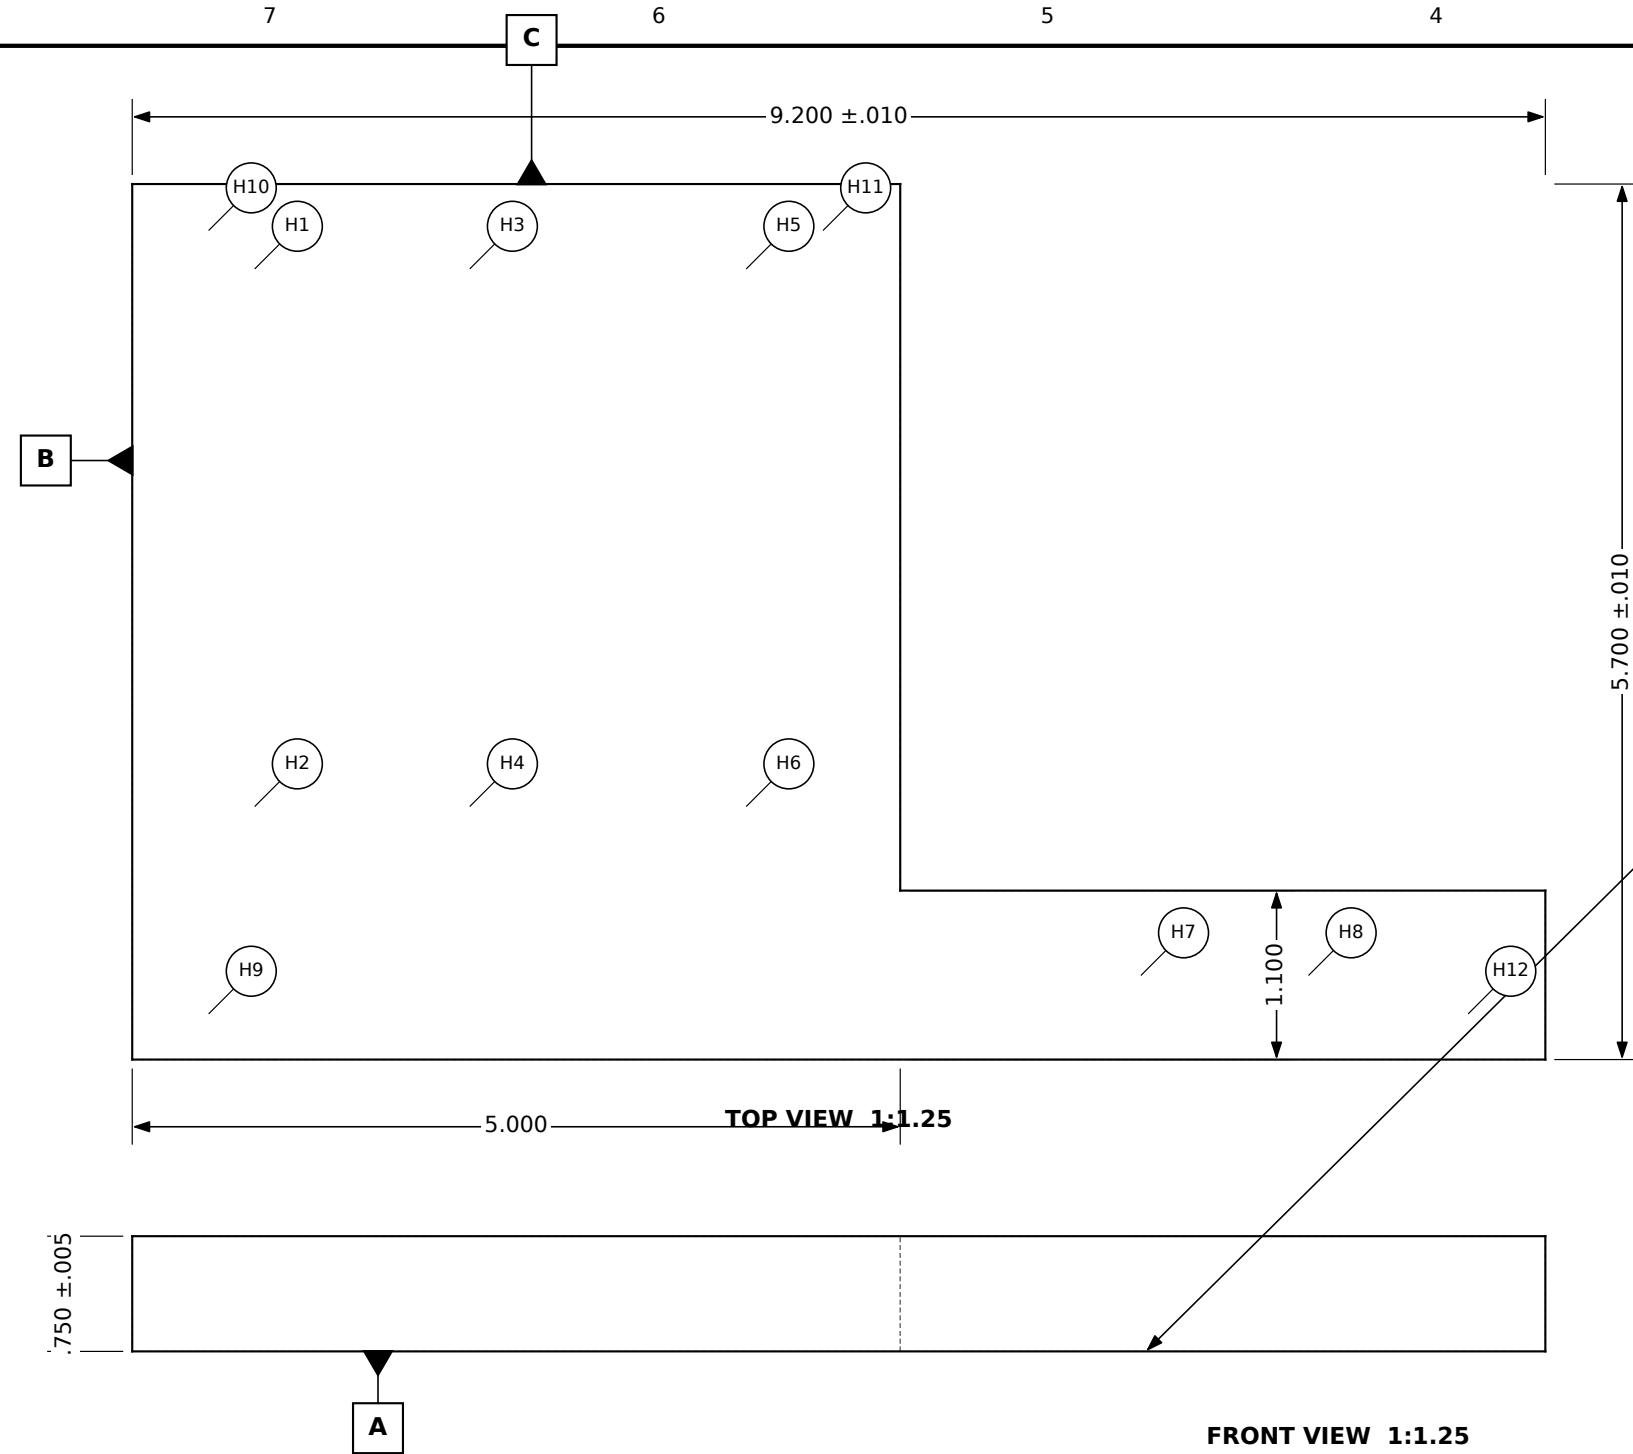

HOLE	SIZE	X	Y
H1	ø.281 THRU 1.42 x .28 (BOTTOM)	0.800	0.550
H2	ø.281 THRU 1.42 x .28 (BOTTOM)	0.800	4.050
H3	ø.281 THRU 1.42 x .28 (BOTTOM)	2.200	0.550
H4	ø.281 THRU 1.42 x .28 (BOTTOM)	2.200	4.050
H5	ø.281 THRU 1.42 x .28 (BOTTOM)	4.000	0.550
H6	ø.281 THRU 1.42 x .28 (BOTTOM)	4.000	4.050
H7	ø.281 THRU 1.42 x .28 (BOTTOM)	6.569	5.150
H8	ø.281 THRU 1.42 x .28 (BOTTOM)	7.660	5.150
H9	ø.406 THRU (CARRIAGE)	0.500	5.400
H10	ø.406 THRU (CARRIAGE)	0.500	0.300
H11	ø.406 THRU (CARRIAGE)	4.500	0.300
H12	ø.406 THRU (CARRIAGE)	8.700	5.400

$\square$	.002
-----------	------

NOTES:

1. DATUM A = BOTTOM FACE (SITS ON THE YAW CARRIAGE PLATE, WT-6C-504). FLAT .002 OVER THE PART.
2. CHEEK AND RACK-FOOT HOLES ARE COUNTERBORED FROM BELOW FOR 1/4-20 SHCS.
3. 4X Ø.406 HOLES TAKE 3/8-16 SHCS INTO THE YAW CARRIAGE PLATE.
4. NOTCH AFT OF X = 18.400: THE ROLL GEARBOX AND NEMA 23 SWING DOWN THROUGH IT AT HIGH PITCH - DO NOT ADD MATERIAL THERE.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES:

.X ±.03	.XX ±.010
---------	-----------

$$.XXX \pm .005 \quad .XXXX \pm .0005$$


ANGLES $\pm 0^{\circ}30'$

BREAK SHARP EDGES .005-.015

SURFACE FINISH 63 $\mu\text{in Ra MAX}$

INTERPRET PER ASME Y14.5-2018

UNDIMENSIONED GEOMETRY PER STEP MODEL



NEXT ASSY: WT-6C-400 PITCH SECTOR ASSY

PROJECT				DRAWN / DATE			
Wind tunnel - motorized 6-component sting balance				Claude (AI-generated) 2026-10-02			
TITLE				CHECKED		APPROVED	
PLATE, BASE, PITCH SECTOR							
MATERIAL				FINISH			
6061-T6 ALUMINUM, .750 PLATE				CLEAR ANODIZE TYPE II			
DWG NO.		REV	SIZE	SCALE	WEIGHT	SHEET	
WT-6C-403		A	B	1:1.25	2.42 lb	27 OF 36	